



MALE END VIEW



TYPICAL PANEL CUTOUT

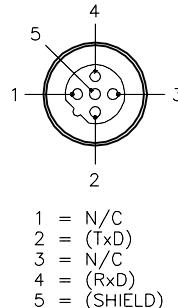

1 = N/C
2 = (Tx)D
3 = N/C
4 = (Rx)D
5 = (SHIELD)

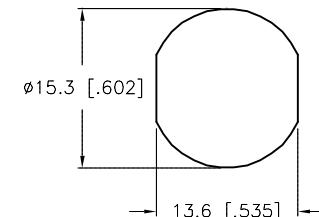

EURO
 PROFI
 BUS

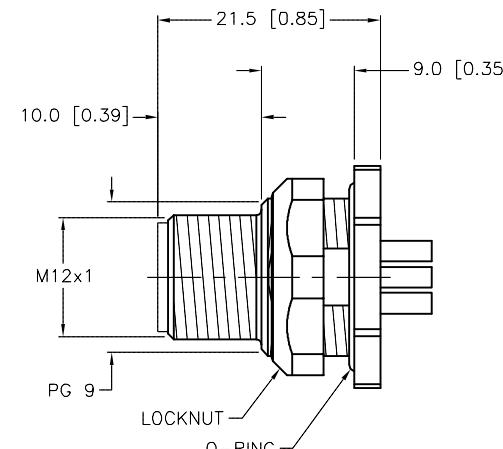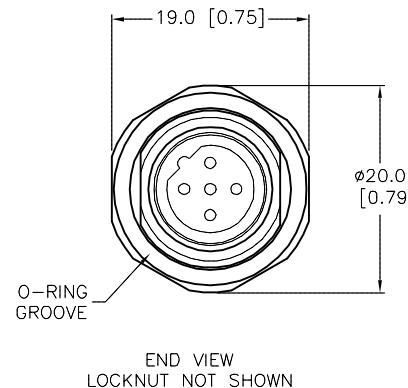

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON OR TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
HOUSING, LOCKNUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
NUMBER OF CONDUCTORS [AWG]	SOLDER CUPS, 20 AWG MAX.
TEMPERATURE RATING	-30°C to +80°C (-22°F to +176°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
MAX. PANEL THICKNESS	3.0 [0.12]

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1.	2.		DRFT	KMY	DATE	12/11/13	DESCRIPTION	FSFDLWV 45
3.	4.	APVD	L.H.	SCALE	1=.8			
		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT		IDENTIFICATION NO.		
MATERIAL		SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION		MILLIMETER [INCH]	REV B		
FINISH		SEE SPECIFICATIONS	DO NOT SCALE THIS DRAWING			FILE: U2-22346		
B UPDATE DIMENSIONS IN END VIEW		RDS 02/10/15 48925	BY	DATE	ECO NO.	SHEET 1 OF 1		
REV DESCRIPTION								