
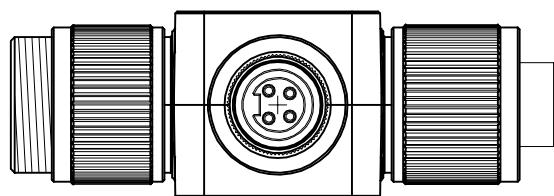
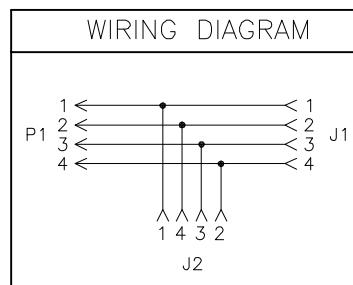


SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	PVC/BLACK
MOLDED MATERIAL/COLOR	PVC/RED
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
COUPLING NUT MATERIAL/FINISH (P1,J1)	ALUMINUM/CLEAR-ANODIZED
COUPLING NUT MATERIAL/PLATING (J2)	BRASS/NICKEL
RATED CURRENT [A]	35 A COMBINED, 18 A DROP
RATED VOLTAGE [V]	600 V
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

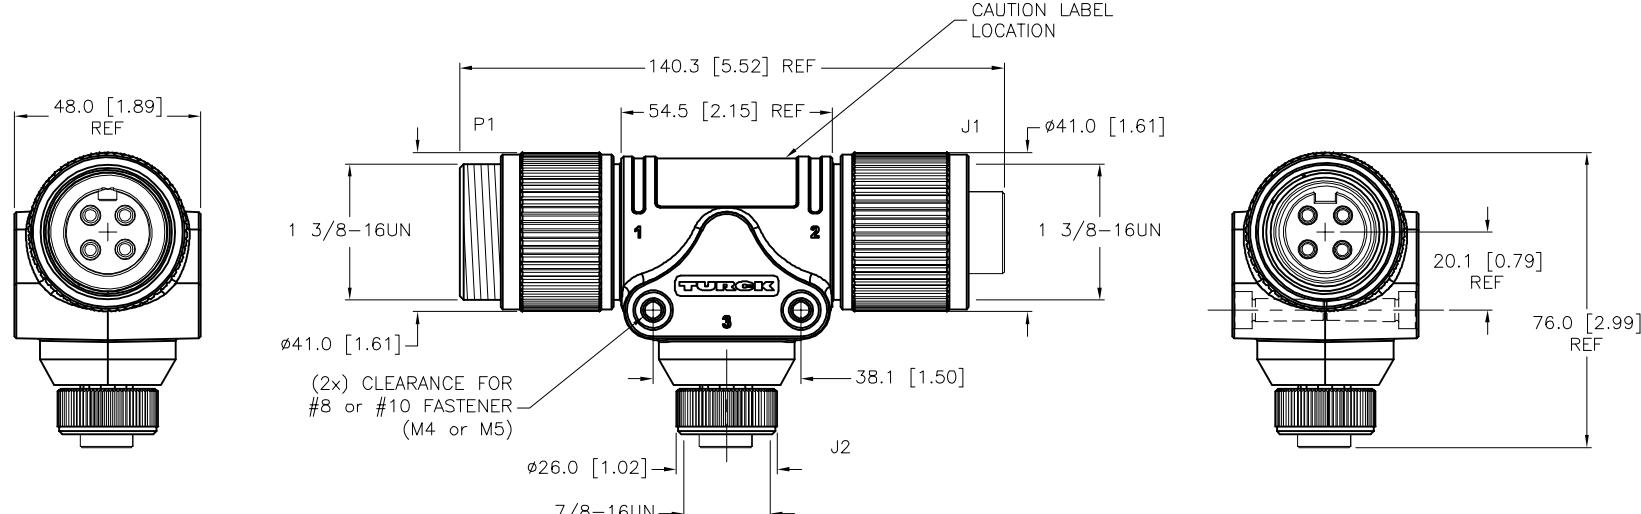

CAUTION:

RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

NOTES.

1. "/S1055" DESIGNATES RED MOULDED PLUG BODY.

C	UPDATE RATED CURRENT	NF	04/26/19	6935
REV	DESCRIPTION	BY	DATE	ECO N

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	 TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us
1. 2. 3. 4.						
MATERIAL SEE SPECIFICATIONS		DRFT APVD	RDS E.S.	DATE 03/03/14 SCALE 1=2.0	DESCRIPTION GSDA/GKDA/RKM 44/S1055	
FINISH SEE SPECIFICATIONS		UNIT OF MEASUREMENT MILLIMETER [INCH]				
		DO NOT SCALE THIS DRAWING			FILE: U2-22637	SHEET 1 OF 1