



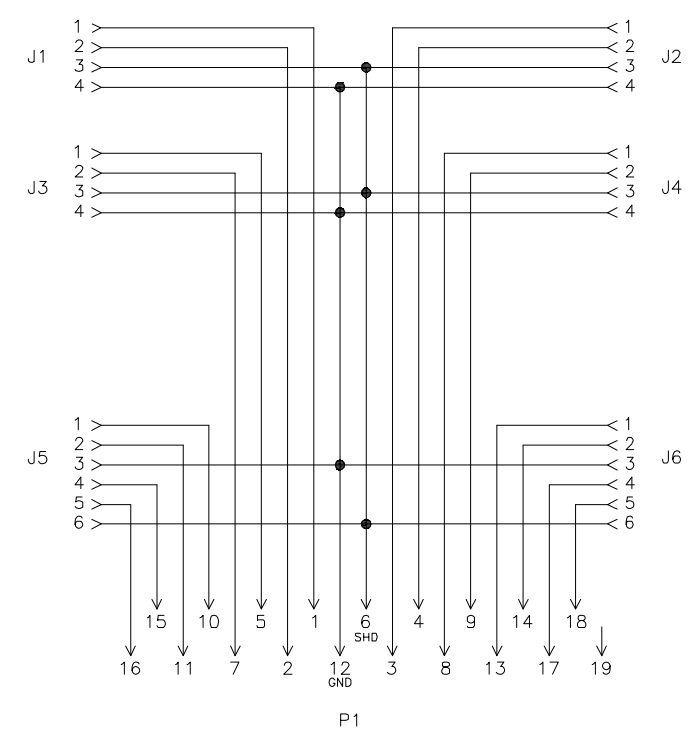


CS19 END VIEW (P1)		FEMALE END VIEW (J1-J4)	FEMALE END VIEW (J5,J6)	SPECIFICATIONS	
  M23 connector		 	 	HOUSING MATERIAL	DIE-CAST ALUMINUM ALLOY
				HOUSING FINISH/COLOR	POWDER COAT/BLACK
				RECEPTACLE HOUSINGS (J1-J6)	STAINLESS STEEL/PASSIVATED
				RECEPTACLE HOUSING (P1)	STAINLESS STEEL/PASSIVATED
				CONTACT CARRIERS/COLOR (J1-J6)	TPU/BLACK
				CONTACT CARRIER/COLOR (P1)	NYLON or PBT/GRAY
				CONTACTS	BRASS/GOLD
				OPERATING VOLTAGE	150 V
				OPERATING CURRENT	4.0 AMPS PER PORT, 8.0 AMPS TOTAL
				PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
				OPERATING TEMPERATURE	-40°C to +80°C (-40°F to +176°F)

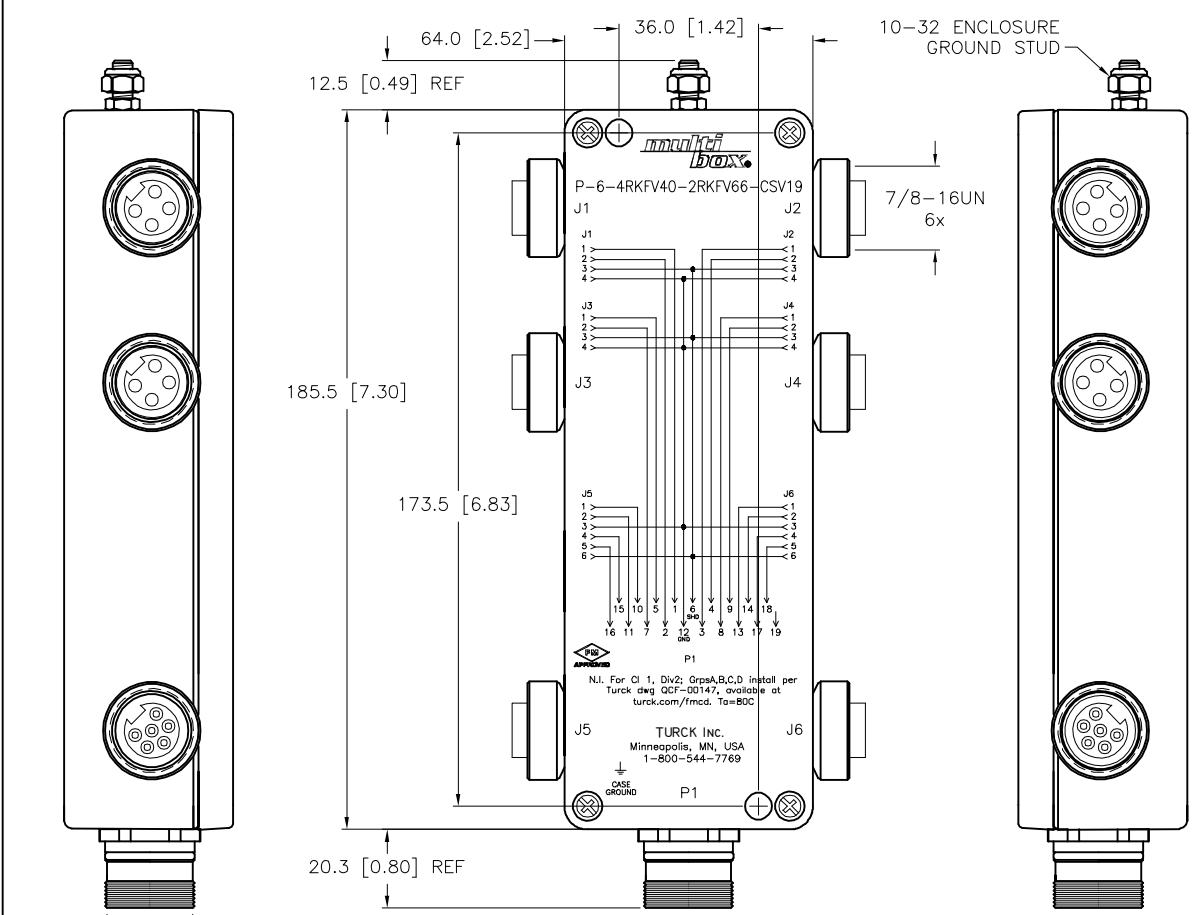

WIRING DIAGRAM
SOURCE DRAWING - FOR REFERENCE ONLY

M23x1 43.5 [1.71] 91.0 [3.58] REF KEYWAY ORIENTATION MAY VARY FROM SHOWN					RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55444 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
SEE SPECIFICATIONS					DRFT RDS APVD J.S.		DATE 04/08/14 SCALE 1=2.0		DESCRIPTION P-6-4RK FV40-2RK FV66-CSV19					
FINISH SEE SPECIFICATIONS					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING				IDENTIFICATION NO. U2-22941		REV B	
B UPDATED TEMPERATURE RATING ER 03/26/19 68987														
REV DESCRIPTION BY DATE ECO NO.											FILE: U2-22941		SHEET 1 OF 1	