


MALE END VIEW (P1)	FEMALE END VIEW (J1)	WIRING DIAGRAM	WIRING DIAGRAM SPECIFICA	
2 (LONG)			CONTACT CARRIER MATERIAL	PVC
		P1 J1	MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
		1 ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~	CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
	3	2 < 1	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
	((((°°°))))	3 ← < 3	RATED CURRENT [A]	21 A
			RATED VOLTAGE [V]	600 V
3			TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
	1		APPROVALS AND CERTIFICATIONS	UL 2237, UL 2238
power fast.	E Indind Tast.			





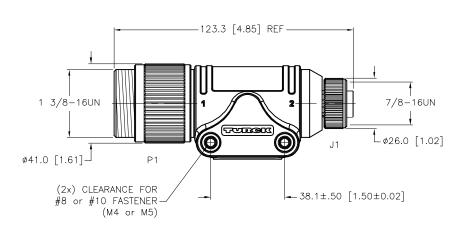

SOURCE DRAWING - FOR REFERENCE ONLY



F	UPDATE RATED CURRENT	NF	01/19/21	500000002372
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE		
2.	A —	PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT		
3. 4.	₩ + 	WRITTEN PERMISSION IS PROHIBITED.		
MATERIAL		DRFT RDS	DATE 04/11/14	DESCRIPTION
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD J.B.	SCALE 1=2.0	P-
	DRAWING ARE FOR REFERENCE ONLY	UNIT OF ME	IDENTIFICATION	
FINISH	CONTACT TURCK FOR MORE	MILLIMETE	ER [INCH]	IDENTIFICATION
SEE SPECIFICATIONS	INFORMATION	l		

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us

P-PWR-GSDM RKM 34-0

UNIT OF MEASUREMENT				
OTTO OF MEADOREMENT	IDENTIFICATION NO.			REV
MILLIMETER [INCH]	U2-22972			F
DO NOT SCALE THIS DRAWING	FILE: U2-22972	SHEET	1	OF