



SPECIFICATIONS

HOUSING MATERIAL/COLOR


NYLON 66/BLACK

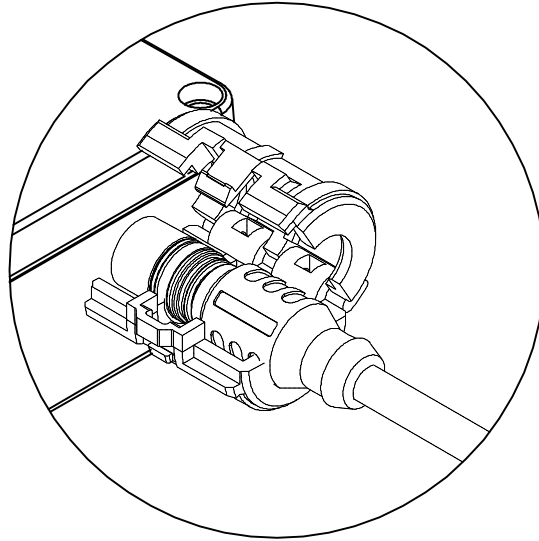

TO INSTALL LOCKOUT DEVICE, PLACE AROUND CORDSET END AND CLOSE UNTIL CONNECTOR SNAPS CLOSED. REFERENCE DIAGRAM OF CONNECTOR.

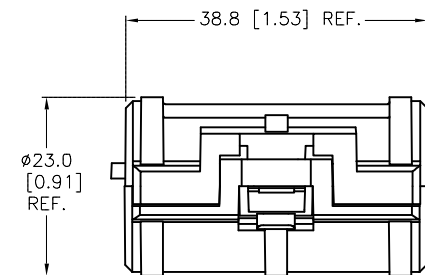


LOCKOUT DEVICE FITS ALL STRAIGHT TURCK EUROFAST CONNECTORS. (RKC, RSC, RKS, RSS, RKSX, RSSX)

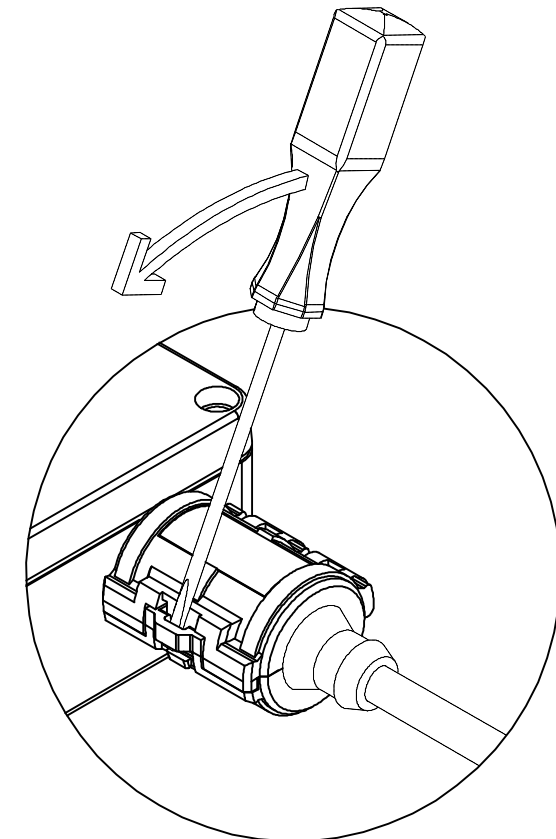

TO REMOVE LOCKOUT DEVICE, INSERT SMALL SCREWDRIVER INTO LOCKING GROOVE AS SHOWN IN PICTURE. ROTATE SCREWDRIVER IN DIRECTION SHOWN UNTIL LOCKING DEVICE RELEASES.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK INC <i>High Technology Sensors and Automation Controls</i> 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 9-RDV-166 2. 3. 4.					
MATERIAL		DRFT RDS	DATE 05/09/14	DESCRIPTION SHLD-EURO (1/PKG)	
		APVD H.D.	SCALE 1=1.0		
FINISH		UNIT OF MEASUREMENT MILLIMETERS DO NOT SCALE THIS DRAWING		IDENTIFICATION NO. U2-23144	
				REV B	
		FILE: U2-23144		SHEET 1 OF 1	

B	UPDATE TO NEW EURO-LOCK PARTS	RDS	05/04/16	54524
REV	DESCRIPTION	BY	DATE	ECO NO.