

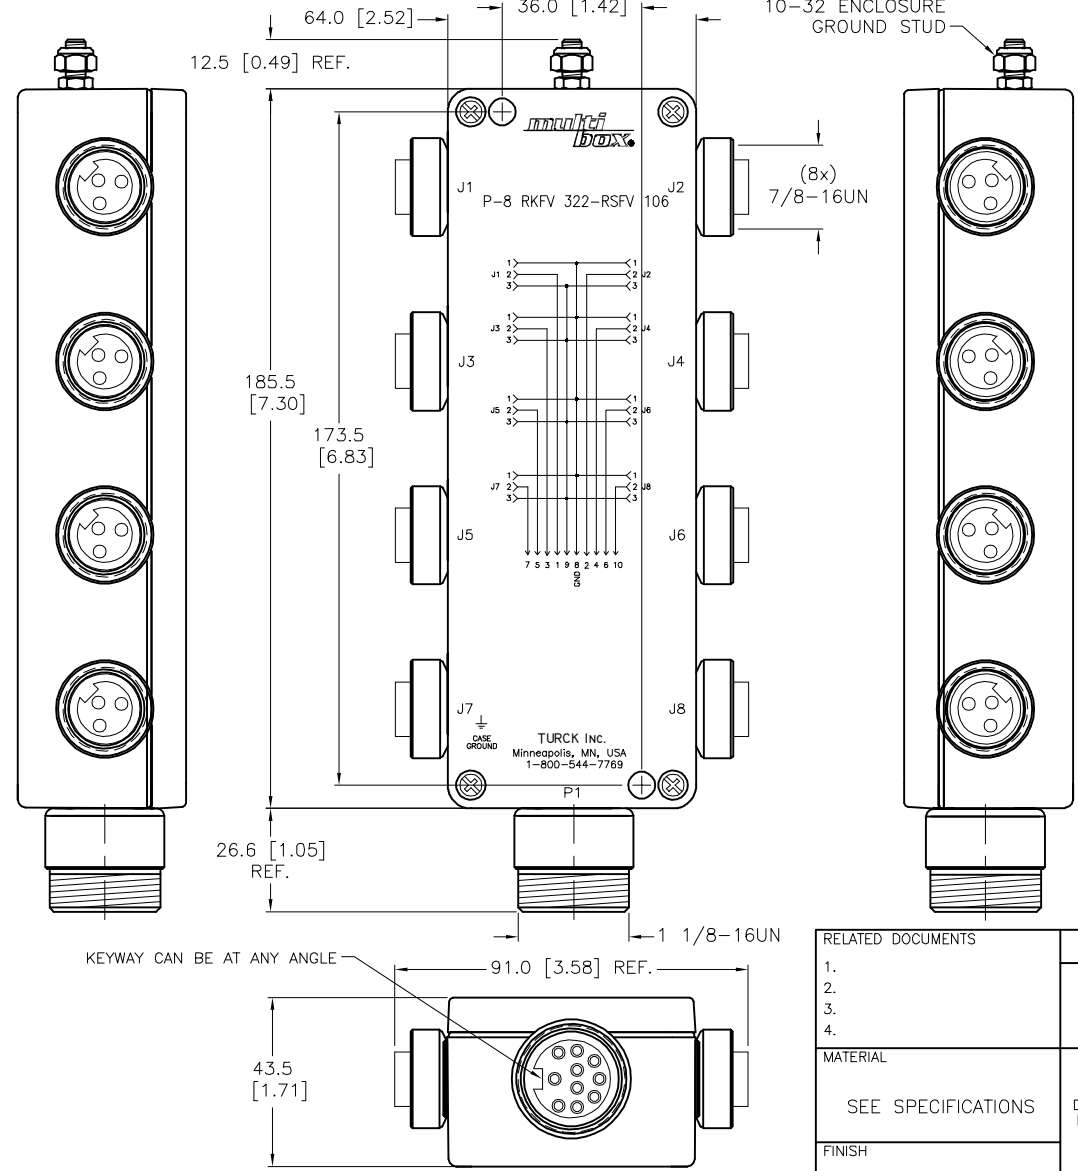
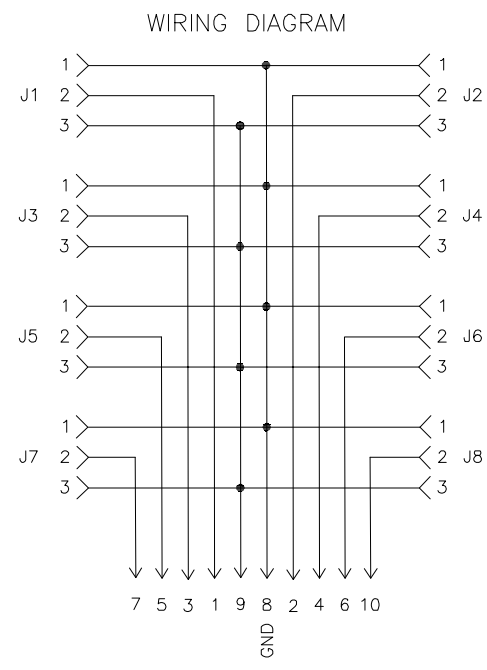


MALE END VIEW (P1)		FEMALE END VIEW (J1-J6)		SPECIFICATIONS	
 1 = PORT 1-2 2 = PORT 2-2 3 = PORT 3-2 4 = PORT 4-2 5 = PORT 5-2 6 = PORT 6-2 7 = PORT 7-2 8 = GROUND 9 = COMMON 10 = PORT 8-2 		 1 = GROUND 2 = LOAD (L2) 3 = COMMON (L1) 		HOUSING MATERIAL	DIE-CAST ALUMINUM ALLOY
				HOUSING FINISH/COLOR	POWDER COAT/BLACK
				RECEPT. HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
				CONTACT CARRIERS/COLOR	TPU/BLACK (J1-J6), YELLOW (P1)
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				OPERATING VOLTAGE	250 VAC/300 VDC
				OPERATING CURRENT	8.0 AMPS TOTAL
				PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
				OPERATING TEMPERATURE	-40°C to +80°C (-40°F to +176°F)

 KEYWAY CAN BE AT ANY ANGLE TURCK INC. Minneapolis, MN, USA 1-800-544-7769		WIRING DIAGRAM 		SOURCE DRAWING - FOR REFERENCE ONLY	
		RELATED DOCUMENTS 1. THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. 2. DRFT RDS DATE 05/22/14 3. APVD N.M. SCALE 1=2.0 4. UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING		3RD ANGLE PROJECTION ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	
SEE SPECIFICATIONS		DESCRIPTION P-8 RKV 322-RSFV 106		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
SEE SPECIFICATIONS		IDENTIFICATION NO. U2-23357		REV B	
B UPDATED TEMPERATURE RATING		ER 03/26/19 68987		FILE: U2-23357	
REV DESCRIPTION		BY DATE ECO NO.		SHEET 1 OF 1	