





SPECIFICATIONS	
MATERIAL	
HOUSING MATERIAL	DIE-CAST ALUMINUM ALLOY
HOUSING FINISH/COLOR	POWDER-COAT/BLACK
RECEPTACLE HOUSING/PLATING	BRASS/NICKEL
CONTACT CARRIERS	NYLON OR TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
SEALING O-RING MATERIAL	VITON O-RING
ELECTRICAL DATA	
OPERATING VOLTAGE	10-48 VDC
MAXIMUM CURRENT	4.0 AMPS PER PORT, 7.0 AMPS TOTAL
MECHANICAL DATA	
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to +90°C (-40°F to +194°F)

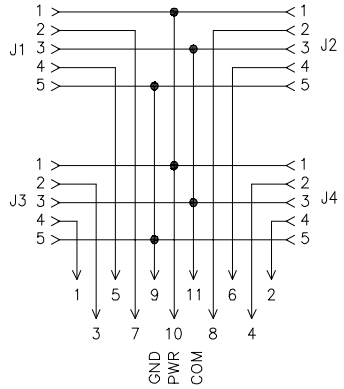

WIRING DIAGRAM

SOURCE DRAWING - FOR REFERENCE ONLY

<div></div> <div>CLOSURE CAPS (2 INCLUDED)</div>					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		<div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</div>					
					1.											
					2.											
					3.											
					4.											
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT		RDS		DATE 06/27/14		DESCRIPTION VBM 40.5-RSF120			
SEE SPECIFICATIONS							APVD		C.K.		SCALE 1=2.0					
FINISH					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING				IDENTIFICATION NO. U2-23380				REV C	
SEE SPECIFICATIONS																
C	ADD CE-UKCA MARK TO CLICHE				RDS	04/29/22	500000004984									
REV	DESCRIPTION				BY	DATE	ECO NO.									