


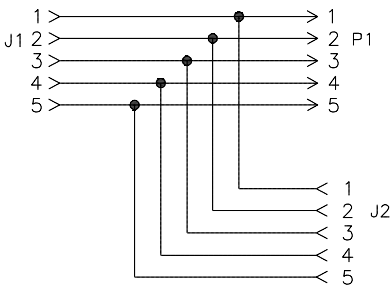


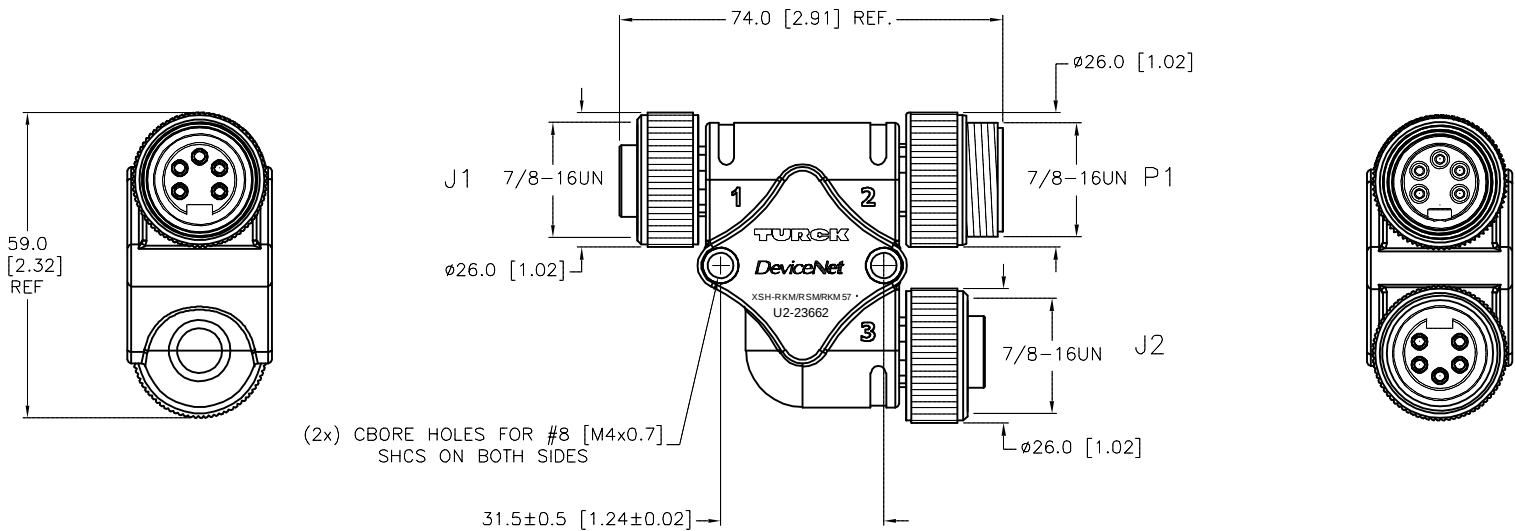


MALE END VIEW (P1)	FEMALE END VIEW (J1-J2)	WIRING DIAGRAM	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL/COLOR	TPU/BLE-GRAY
 			MOLDED BODY MATERIAL/COLOR	TPU/BLACK
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	9.0 A
			RATED VOLTAGE [V]	600 V
			TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67



SOURCE DRAWING - FOR REFERENCE ONLY

					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
					1.									
					2.									
					3.									
4.		MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT		RDS		DATE 10/02/14		DESCRIPTION XSH-RKM/RSM/RKM 57		
SEE SPECIFICATIONS		APVD				A.A.		SCALE 1=1.5						
FINISH		UNIT OF MEASUREMENT MILLIMETERS				CONTACT TURCK FOR MORE INFORMATION								
SEE SPECIFICATIONS														
A		DRAWING RELEASE			RDS		04/29/15							
REV		DESCRIPTION			BY		DATE		ECO NO.					