




## MALE END VIEW (P1)



## FEMALE END VIEW (J1-J2)




## WIRING DIAGRAM

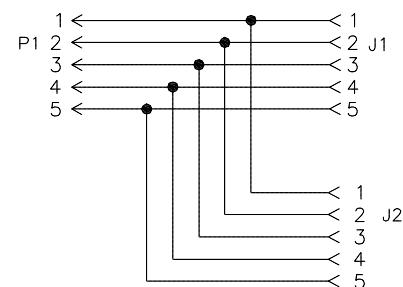

## SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	TPU/BLU-GRAY
MOLDED BODY MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	600 V
TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

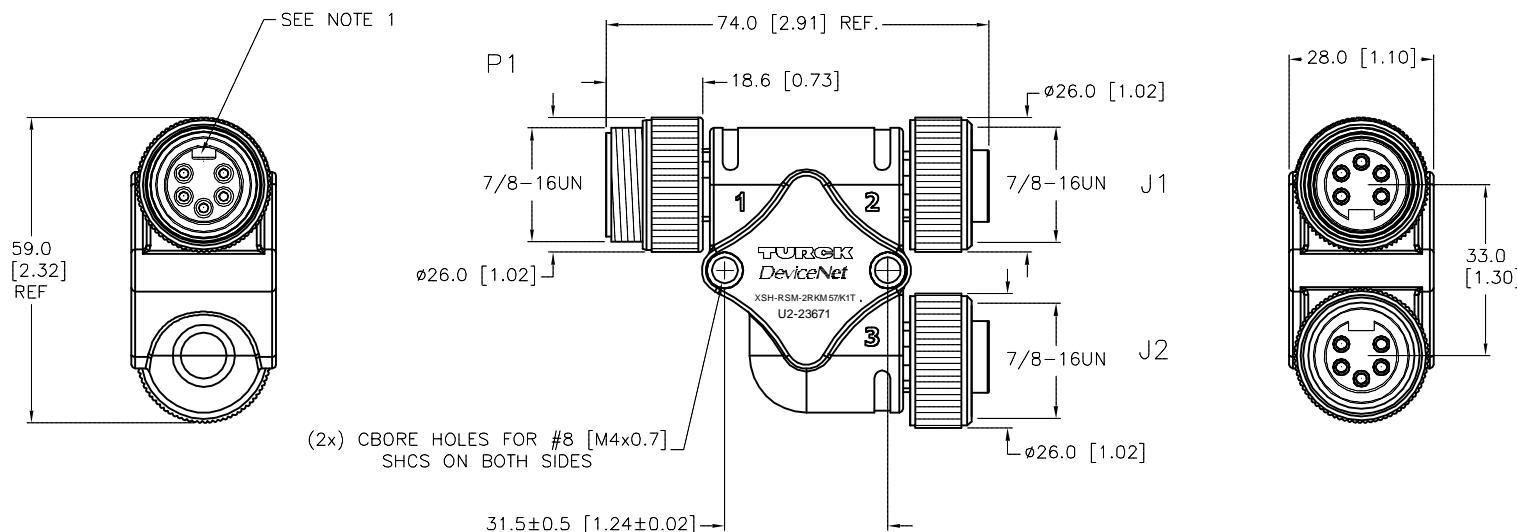

(2x) CBORE HOLES FOR #8 [M4x0.7]  
SHCS ON BOTH SIDES

## NOTES:

1. "/K1T" DESIGNATES KEYWAY OF CONNECTOR #1 ROTATED TO TOP OF ASSEMBLY. (180° FROM STANDARD).

## SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		DESCRIPTION	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com
		DRFT	RDS	DATE 09/18/14	
MATERIAL	APVD	A.A.	SCALE 1=1.5	DESCRIPTION	XSH-RSM-2RKM 57/K1T
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT	MILLIMETERS	IDENTIFICATION NO.	U2-23671
FINISH	CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING	REV		A
SEE SPECIFICATIONS		FILE: U2-23671		SHEET 1 OF 1	

A DRAWING RELEASE

RDS 04/29/15

REV DESCRIPTION

BY DATE ECO NO.