




FEMALE END VIEW

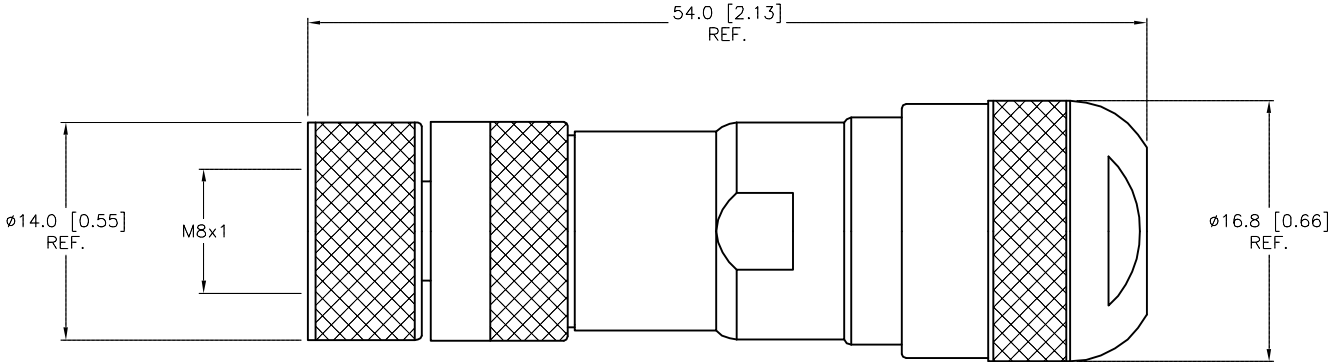


SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	NYLON/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	30 V
CABLE OUTLET	ø6.0 to ø8.0 [0.236–0.315]
TERMINATION TYPE	SCREW
WIRE SIZE	26–20 AWG
TEMPERATURE RANGE	–40°C to +85°C (–40°F to +185°F)
PROTECTION CLASS	MEETS IEC IP67



SOURCE DRAWING - FOR REFERENCE ONLY

<div>RELATED DOCUMENTS</div> <div>1.</div> <div>2.</div> <div>3.</div> <div>4.</div>					3RD ANGLE PROJECTION		<div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div> <div><div>TURCK INC</div><div>High Technology Sensors and Automation Controls</div></div> <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</div>					
												
					MATERIAL		DRFT NF		DATE 02/16/15		DESCRIPTION CMB 5141-0 (6-8MM)	
					SEE SPECIFICATIONS		APVD L.S.		SCALE 1=.5			
FINISH					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT MILLIMETER [ INCH ]		IDENTIFICATION NO.		REV	
									U2-24420		B	
SEE SPECIFICATIONS					CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		FILE: U2-24420		SHEET 1 OF 1	
B	UPDATE DESCRIPTION			RDS	04/14/15	49529						
REV	DESCRIPTION			BY	DATE	ECO NO.						