
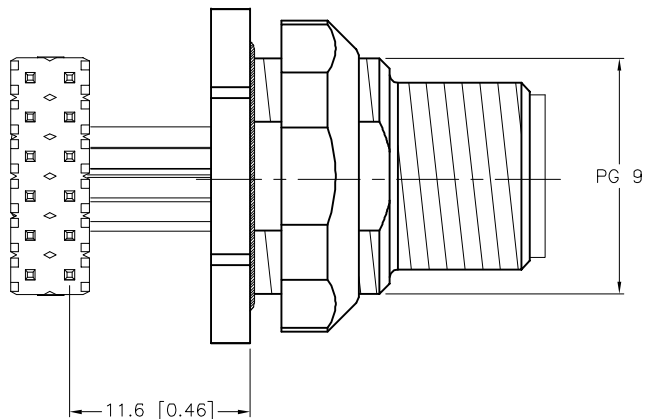
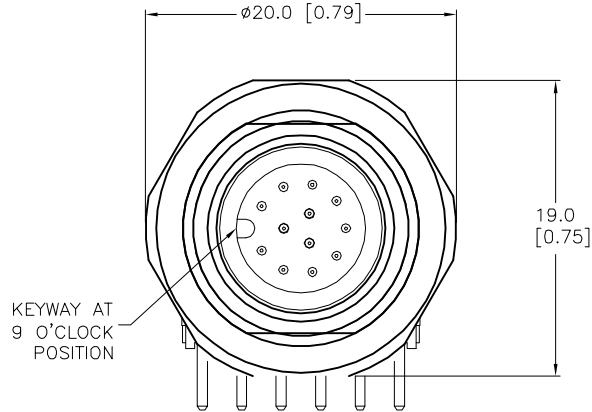
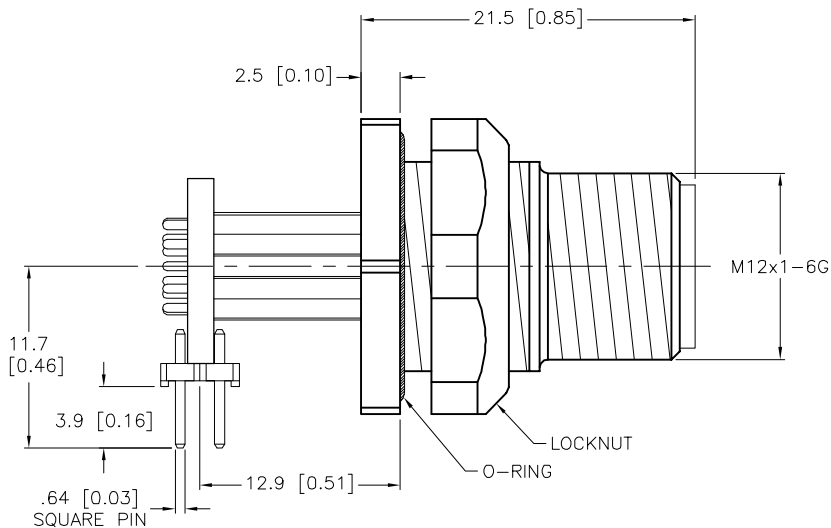


MALE END VIEW	BOARD LAYOUT	TYPICAL PANEL CUTOUT	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL	NYLON or TPU
			CONTACT MATERIAL/PLATING	BRASS/GOLD
	CONNECTOR SIDE		HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
			LOCKNUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
			RATED CURRENT [A]	2.0 A
			RATED VOLTAGE [V]	30 V
			TERMINAL PIN MATERIAL/PLATING	PHOSPHOR BRONZE/GOLD
			TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
			MAX. PANEL THICKNESS	3.0 [0.12]



SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE	05/28/15	DESCRIPTION WFSDV 12-PCBH			
SEE SPECIFICATIONS		APVD	C.K.	SCALE	1=.5				
FINISH	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT				IDENTIFICATION NO. U2-24870		REV B	
SEE SPECIFICATIONS		MILLIMETER [INCH]							
		DO NOT SCALE THIS DRAWING				FILE: U2-24870		SHEET 1 OF 1	

B	UPDATE VOLTAGE RATING	CBM	02/21/23	78300
REV	DESCRIPTION	BY	DATE	ECO. NO.