




MALE END VIEW

FEMALE END VIEW



SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PVC/BLACK
MOLDED MATERIAL/COLOR	PVC/RED
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	40 A
RATED VOLTAGE [V]	600 VAC
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K

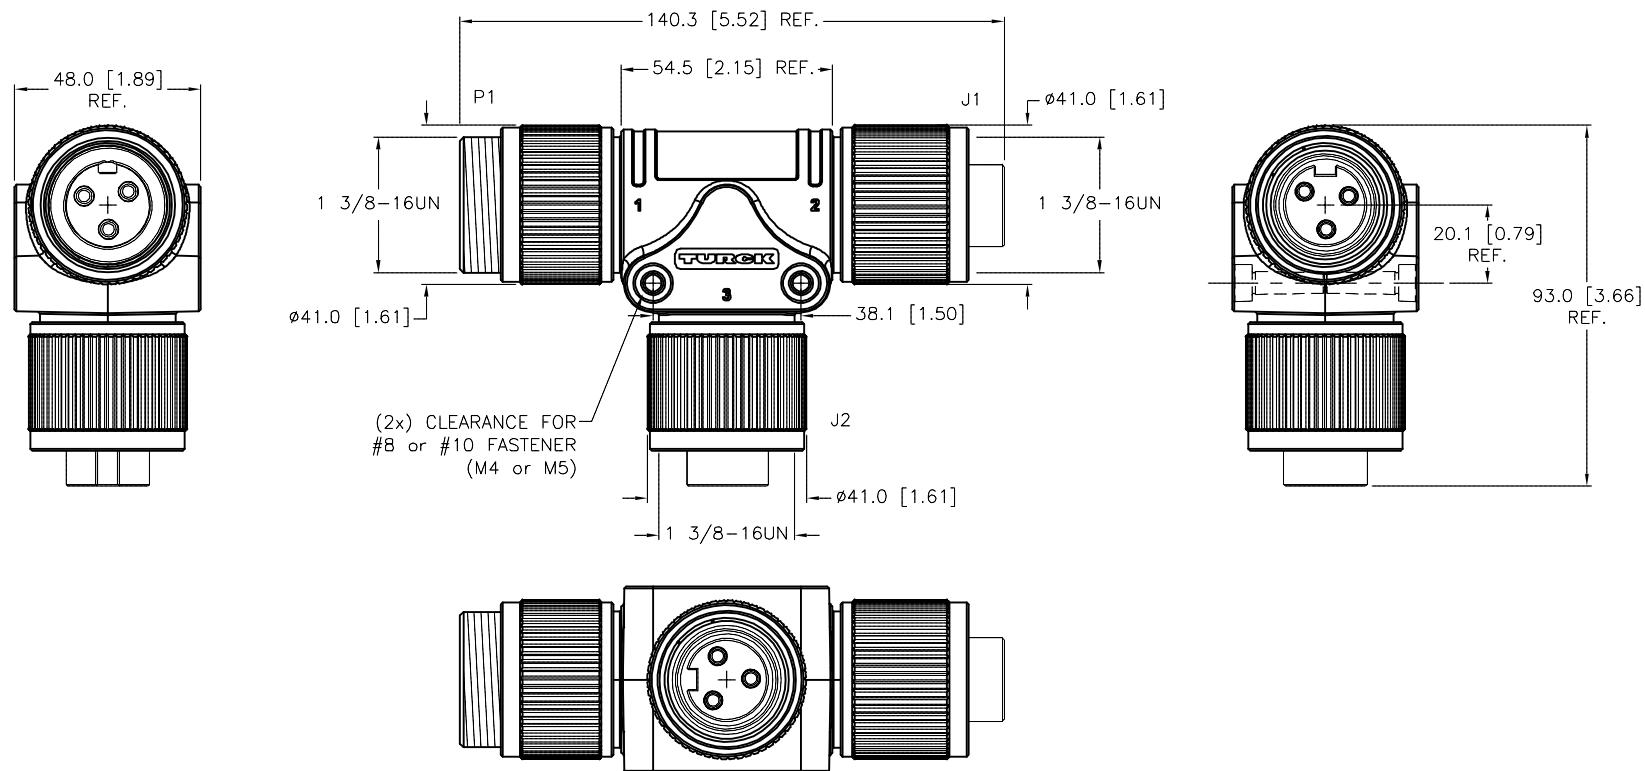

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "/S1055" DESIGNATES RED MOLD BODY.

**CAUTION:**RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

RELATED DOCUMENTS

- 1.
- 2.
- 3.
- 4.

3RD ANGLE PROJECTION



THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441

1-800-544-7769

(763) 553-7300

(763) 553-0708 fax

www.turck.us

MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

DRFT

NF

DATE

09/04/15

DESCRIPTION

CSDM/2GKDM 30/S1055

APVD

K.Y.

SCALE

1=2.0

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

IDENTIFICATION NO.

U2-25734

REV

B

B | UPDATED CURRENT RATING

ER

04/25/19

69361

REV | DESCRIPTION

BY

DATE

ECO NO.

SHEET 1 OF 1