

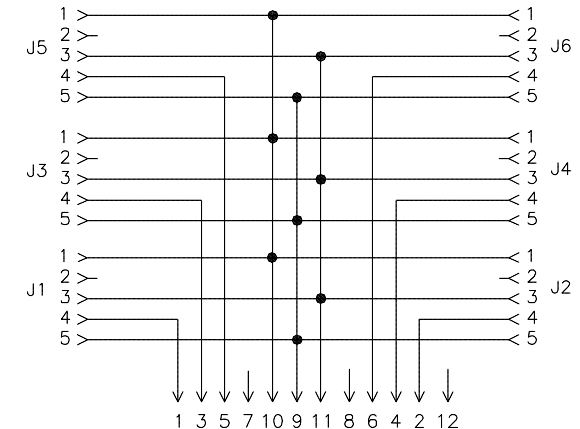




SPECIFICATIONS	
CONTACT CARRIERS	NYLON (J1-J6), TPU (P1)
HOUSING/COLOR	NYLON/YELLOW
RECEPTACLE MATERIAL/PLATING	BRASS/NICKEL
CONTACTS MATERIAL/PLATING	BRASS/GOLD
SEALING RING	VITON O-RING
OPERATING VOLTAGE	10-48 VDC
OPERATING CURRENT	4.0 AMPS PER PORT, 7.0 AMPS TOTAL
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-30°C to +80°C (-22°F to +176°F)

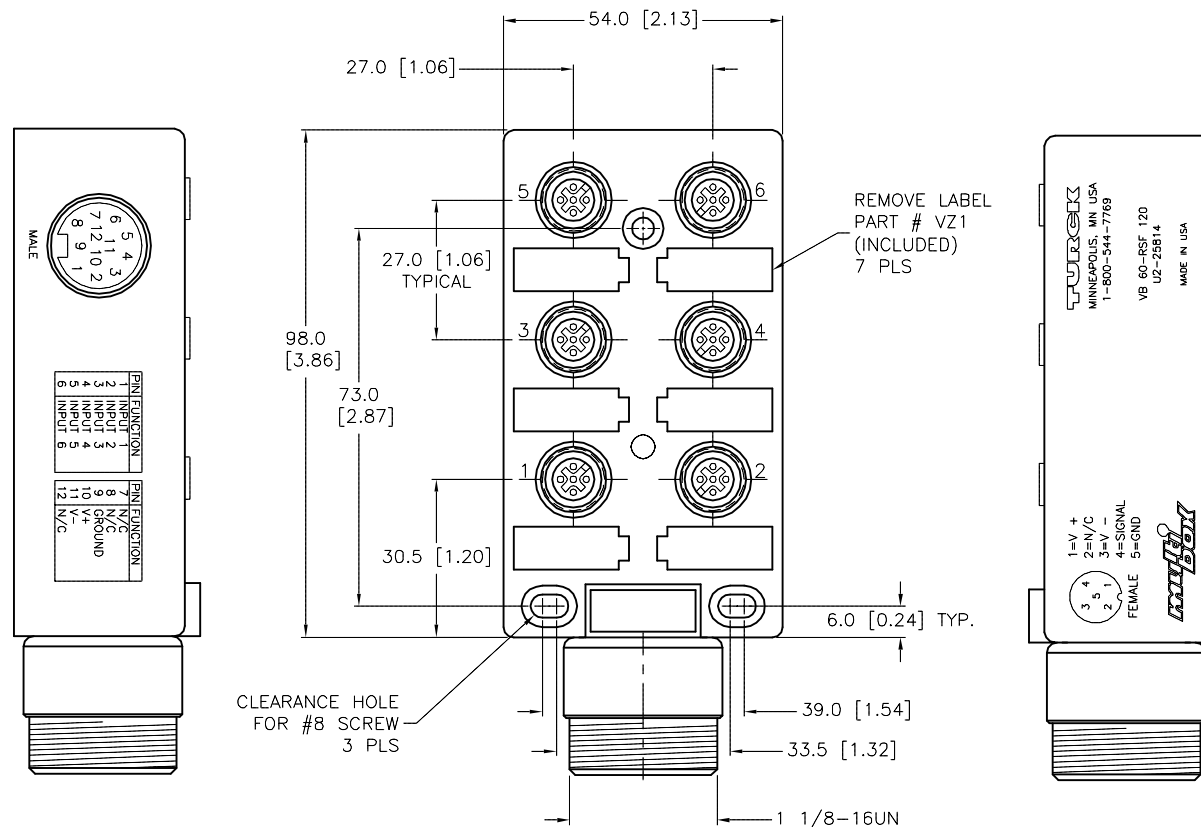

WIRING DIAGRAM

SOURCE DRAWING - FOR REFERENCE ONLY

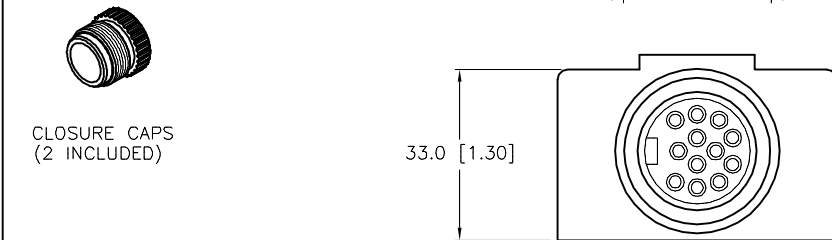

RELATED DOCUMENTS		3RD ANGLE PROJECTION		<div> High Technology Sensors and Automation Controls</div>		<div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (612) 553-7300 (612) 553-0708 fax www.turck.com</div>	
1. 2. 3. 4.		<div></div>					
MATERIAL		DRFT NF		DATE 09/22/15		DESCRIPTION VB 60-RSF 120	
SEE SPECIFICATIONS		APVD L.H.		SCALE 1=1.5			
FINISH		UNIT OF MEASUREMENT MILLIMETER [ INCH ]		IDENTIFICATION NO. U2-25814		REV A	
SEE SPECIFICATIONS							
		DO NOT SCALE THIS DRAWING		FILE: U2-25814		SHEET 1 OF 1	