
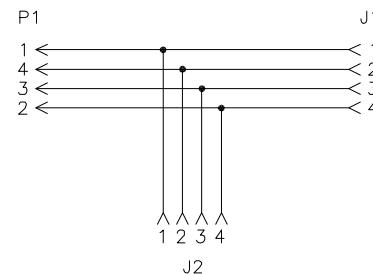



MALE END VIEW





FEMALE END VIEW (J1,J2)

WIRING DIAGRAM

SPECIFICATIONS




CONTACT CARRIER MATERIAL	PVC
MOLDED MATERIAL/COLOR	PVC/BLACK
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	25 A COMBINED, 15 A (J1, J2)
RATED VOLTAGE [V]	600 V
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
APPROVALS AND CERTIFICATIONS	UL 2237

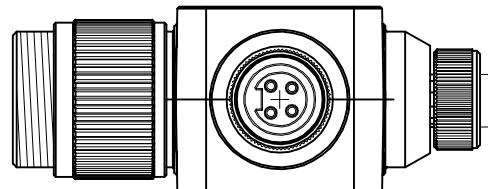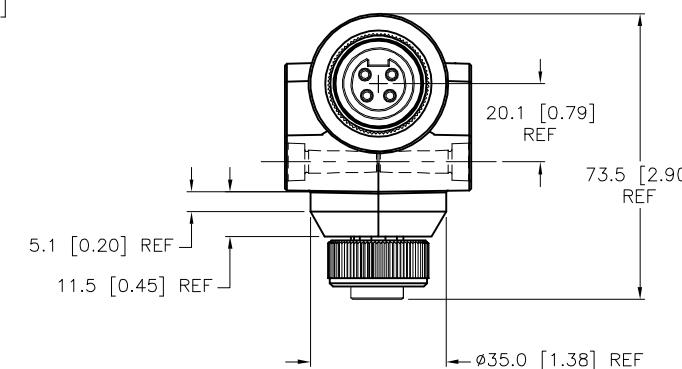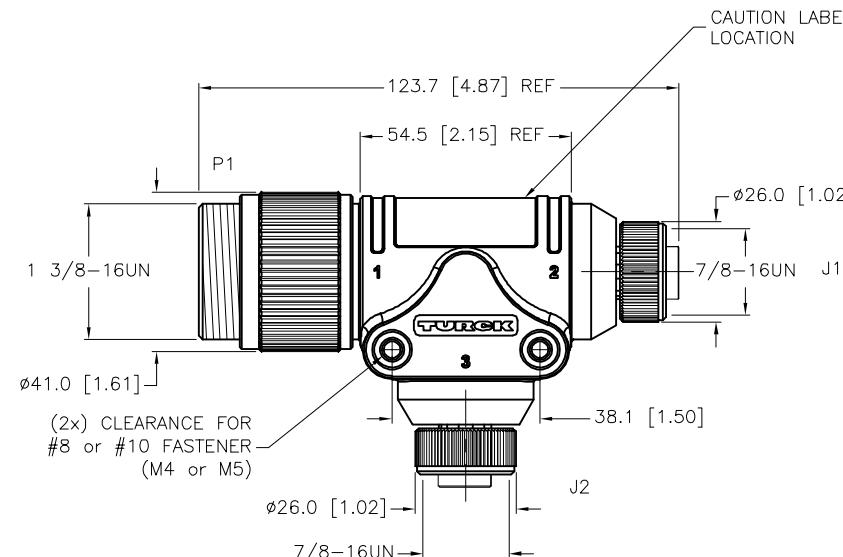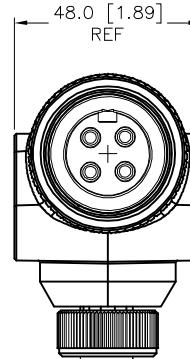

SOURCE DRAWING - FOR REFERENCE ONLY

**CAUTION:**RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

RELATED DOCUMENTS
1.
2.
3.
4.



THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

MATERIAL
SEE SPECIFICATIONS
FINISH
SEE SPECIFICATIONS

DRFT TV DATE 12/21/15
APVD SCALE 1=2.0
UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

TURCK

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

GSDM/2RKM 44

DESCRIPTION	IDENTIFICATION NO.	REV
GSDM/2RKM 44	U2-26307	D
	FILE: U2-26307	SHEET 1 OF 1

D UPDATE WIRING

NF 02/24/23 500000007902

REV DESCRIPTION

BY DATE ECO NO.