

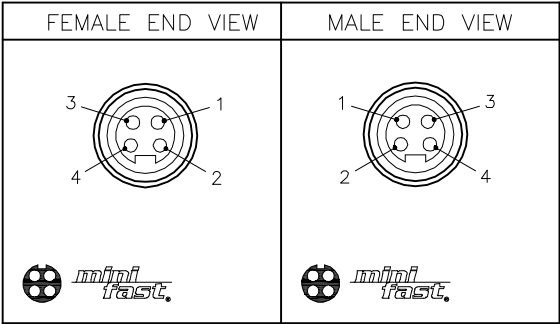


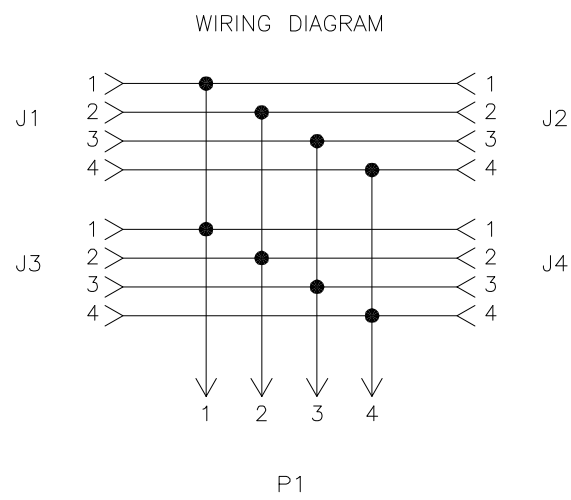

SPECIFICATIONS	
MATERIAL	
HOUSING MATERIAL	ALUMINUM ALLOY
HOUSING FINISH/COLOR	EPOXY/BLACK
CONTACT CARRIER MATERIAL	TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
RECEPTACLE MATERIAL/PLATING	BRASS/NICKEL
ELECTRICAL DATA	
OPERATING VOLTAGE	300 VDC
OPERATING CURRENT	9.0 A
MECHANICAL DATA	
PROTECTION CLASS to DIN 40050	IP 67 ONLY WHEN RKM 66 CORDSET AND ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to +105°C (-40°F to +221°F)

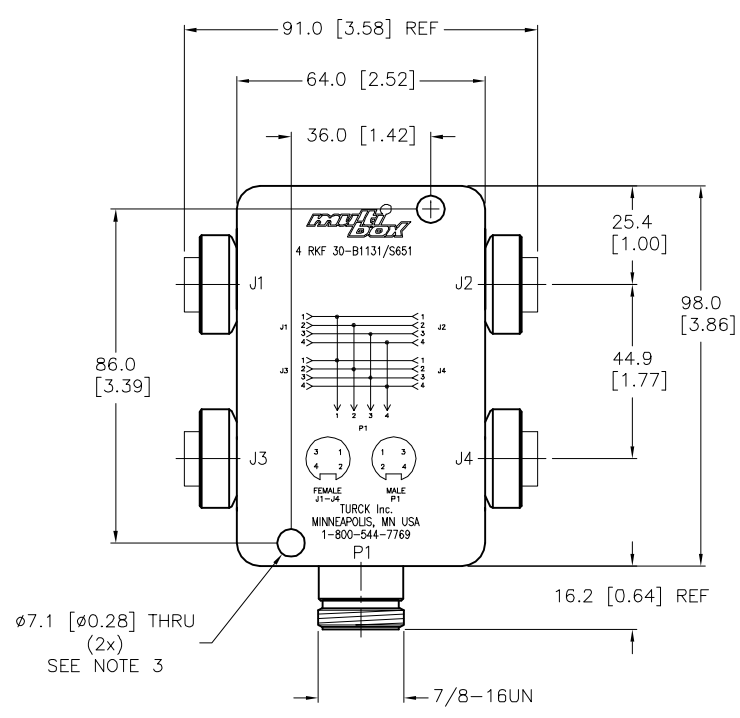

NOTES:

1. "/S651" DESIGNATES PARALLEL WIRING.

2. BOX HEIGHT IS 1.36 [36.0 mm] NOMINAL.

3. CLEARANCE HOLE FOR 1/4-20 MOUNTING SCREWS (NOT SUPPLIED).

4. MATING CORDSET FOR B1141 CONNECTOR – RKM 40-* M.

A	DRAWING RELEASE	NF	01/29/16	
REV	DESCRIPTION	BY	DATE	ECO. NO.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.				TURCK			
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT	NF	DATE	01/13/16
FINISH		CONTACT TURCK FOR MORE INFORMATION		APVD	K.Y.	SCALE	1=2.0
				UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION 4 RKF 40-B1141/S651	
						IDENTIFICATION NO.	U2-26463
						REV	A
				DO NOT SCALE THIS DRAWING		FILE: U2-26463	
						SHEET 1 OF 1	