

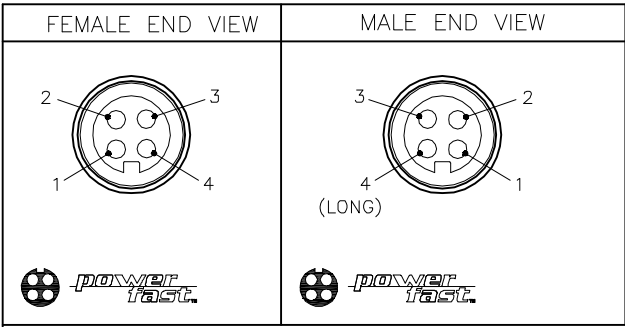


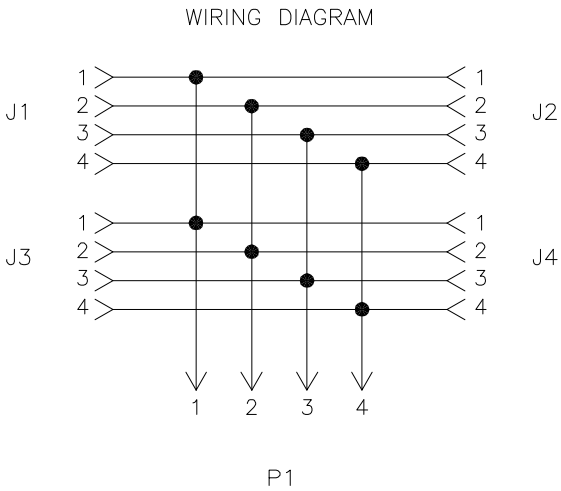

SPECIFICATIONS	
HOUSING MATERIAL	ALUMINUM ALLOY
HOUSING FINISH/COLOR	POWDER COAT/BLACK
CONTACT CARRIER MATERIAL	PVC
CONTACT MATERIAL/PLATING	BRASS/GOLD
RECEPTACLE HOUSING/PLATING	BRASS/NICKEL
OPERATING VOLTAGE	600 V
OPERATING CURRENT	15.0 A
PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	–40°C to +105°C (–40°F to +221°F)

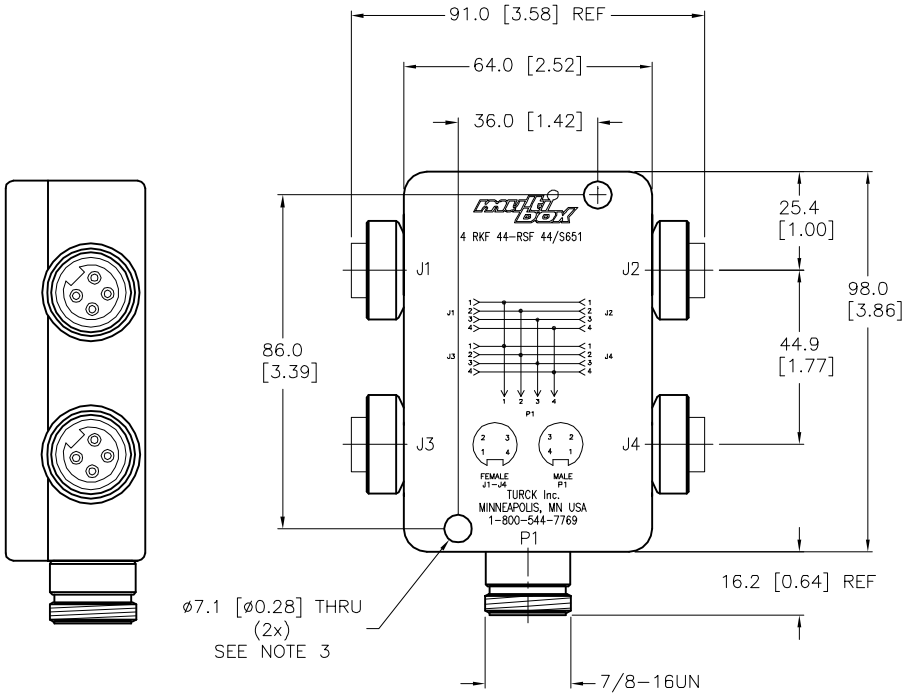

- NOTES:
1. "/S651" DESIGNATES PARALLEL WIRING.
 2. BOX HEIGHT IS 1.36 [36.0 mm] NOMINAL.
 3. CLEARANCE HOLE FOR 1/4-20 MOUNTING SCREWS (NOT SUPPLIED).

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.						DRFT TV		DATE 02/23/16	
MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD L.H.		SCALE 1=2.0	
FINISH				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION 4 RKF 44-RSF 44/S651	
A DRAWING RELEASE				TV 03/09/16		DO NOT SCALE THIS DRAWING		IDENTIFICATION NO. U2-26631	
REV DESCRIPTION				BY DATE ECO NO.		FILE: U2-26631		REV A	
								SHEET 1 OF 1	