


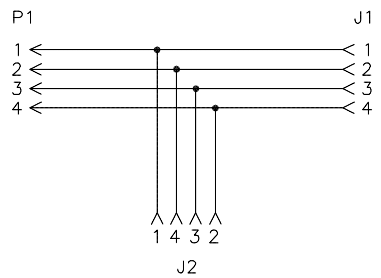
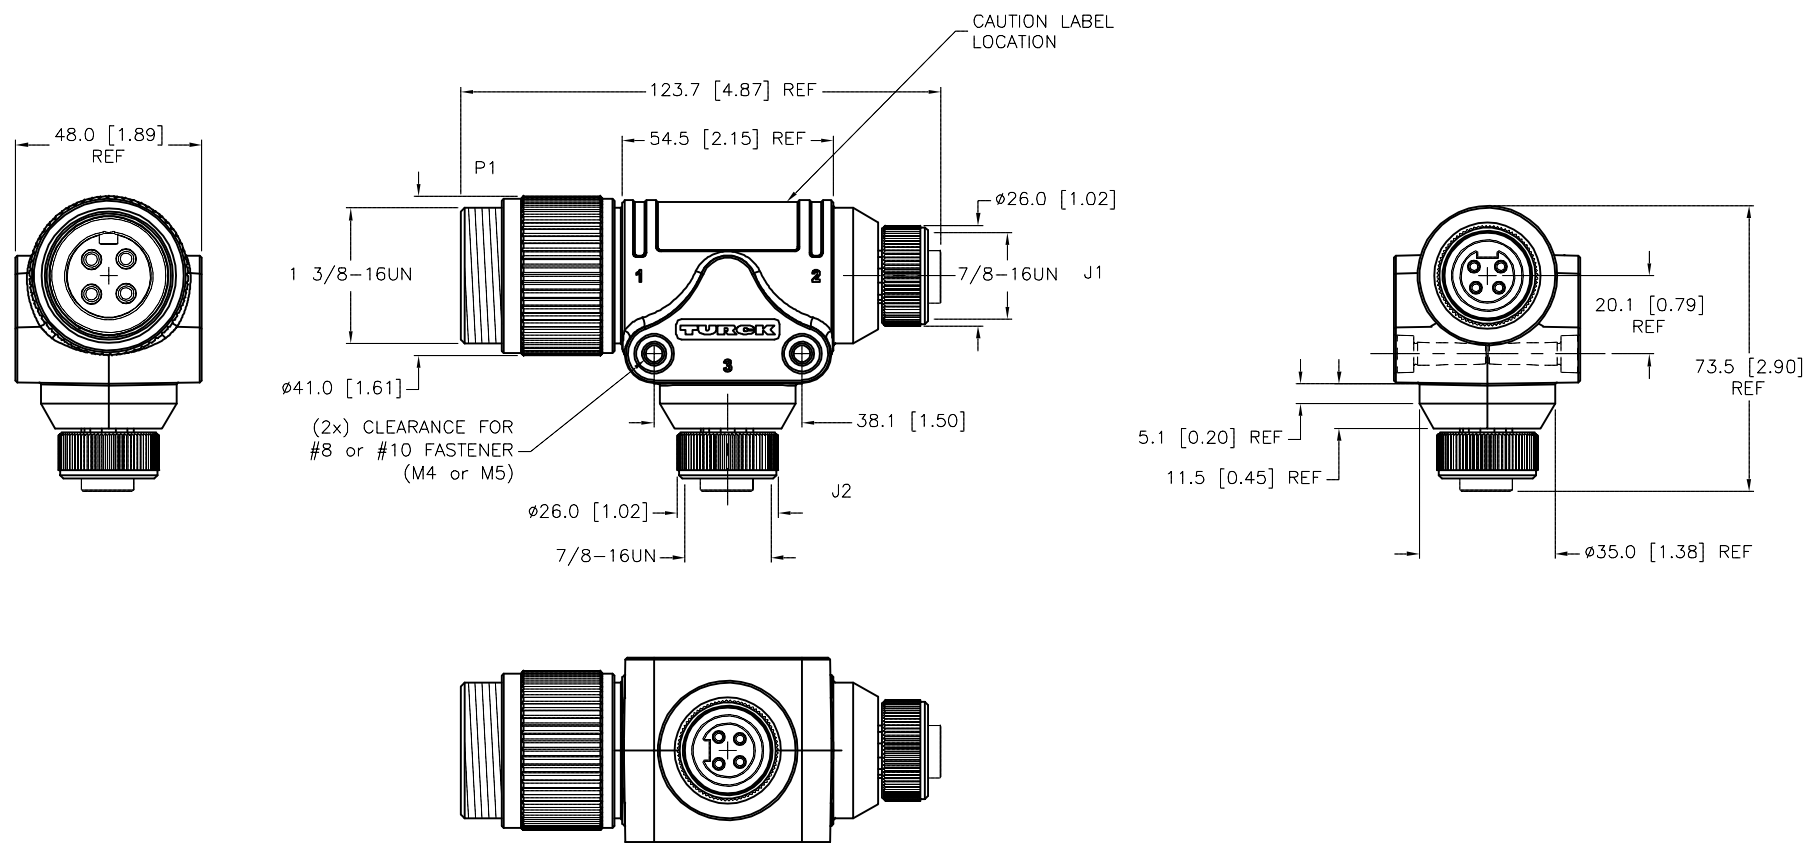


MALE END VIEW	FEMALE END VIEW (J1,J2)	WIRING DIAGRAM	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL	PVC
			MOLDED MATERIAL/COLOR	PVC/BLACK
			CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
			COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
			RATED CURRENT [A]	25 A COMBINED, 15 A (J1, J2)
			RATED VOLTAGE [V]	600 V
			TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67



SOURCE DRAWING - FOR REFERENCE ONLY

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

 CAUTION: RISK OF ELECTRICAL SHOCK DO NOT DISCONNECT UNDER LOAD					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
					1. 2. 3. 4.									
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RDS		DATE 04/25/16		DESCRIPTION GSDV/2RKV 44	
					SEE SPECIFICATIONS				APVD L.H.		SCALE 1=2.0			
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO. U2-27022		REV A				
SEE SPECIFICATIONS				DO NOT SCALE THIS DRAWING				FILE: U2-27022		SHEET 1 OF 1				
A	DRAWING RELEASE				RDS	05/02/16								
REV	DESCRIPTION				BY	DATE		ECO NO.						