


MALE END VIEW






- 1 = BLUE (- VOLTAGE)
- 2 = BROWN (+ VOLTAGE)
- 3 = BARE (SHIELD)
- 4 = GREEN/YELLOW (GROUND)



FOUNDATION™
fieldbus

SPECIFICATIONS



CONTACT MATERIAL/PLATING	BRASS/GOLD
CONTACT CARRIER MATERIAL/COLOR	PLASTIC, TPU/BLACK
CABLE GRIP MATERIAL/COLOR	PLASTIC, PA/BLACK
COUPLING NUT MATERIAL/PLATING	DIECAST ZINC/NICKEL
SEAL MATERIAL	PLASTIC, NBR
SCREW-IN THREAD SEAL MATERIAL	PLASTIC, NBR
DEGREE OF PROTECTION	IP67
CABLE GRIP RANGE	ø6-8mm
SCREW-IN THREAD	PG 9
RATED VOLTAGE [V]	250 V MAX.
INSULATION RESISTANCE	≥ 10 ⁹ Ω
RATED CURRENT [A]	9.0 A
FORWARD RESISTANCE	≤ 5 mΩ
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)

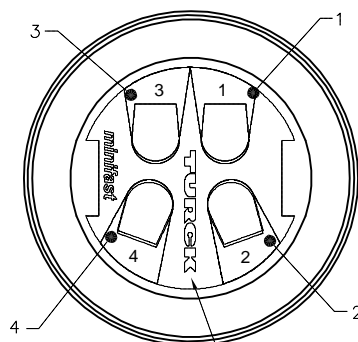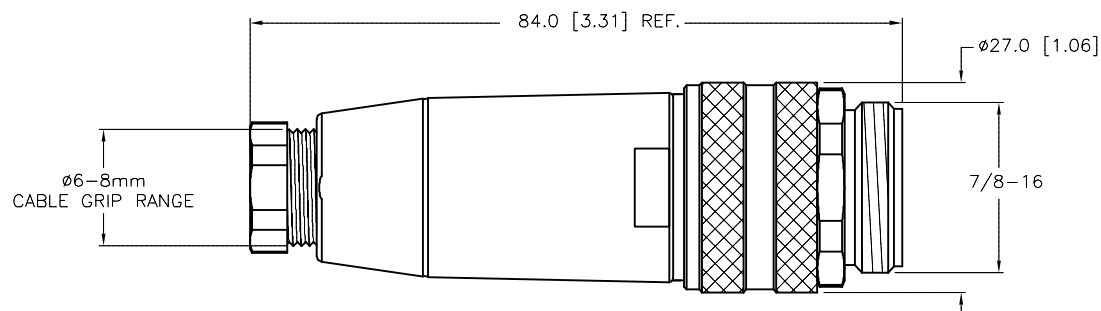

WIRE SIDE VIEW
OF CONTACT HOLDER
TO SHOW LABEL DETAILS

LABEL ORIENTATION
TO KEYWAY
(SCALE 2:1)

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	TV	DATE	12/27/16	DESCRIPTION BS 4140-0/9/LABEL		
APVD		L.S.	SCALE	1=1.0				
FINISH SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING			IDENTIFICATION NO. U2-28180		REV A
					FILE: U2-28180		SHEET 1 OF 1	

A	DRAWING RELEASE	TV	02/13/17	
REV	DESCRIPTION	BY	DATE	ECO NO.