


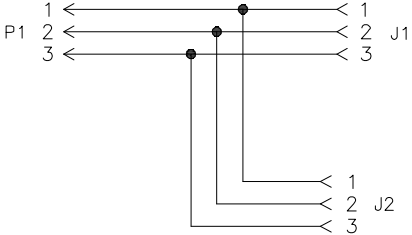
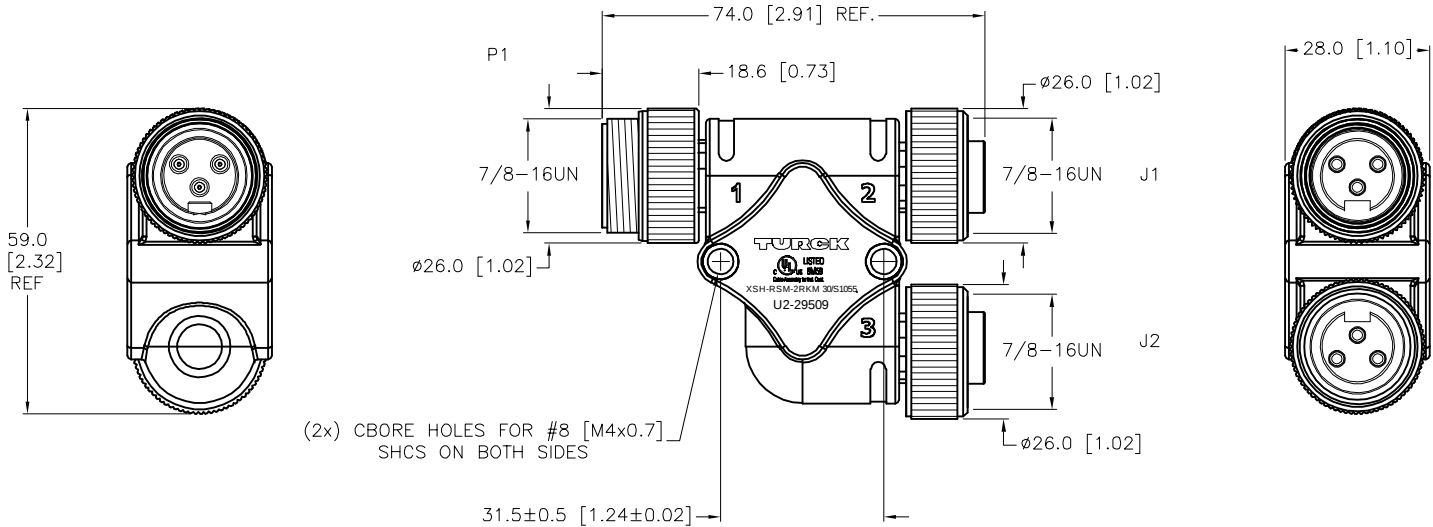


MALE END VIEW (P1)	FEMALE END VIEW (J1-J2)	WIRING DIAGRAM	SPECIFICATIONS	
 	 		CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
			MOLDED BODY MATERIAL/COLOR	TPU/RED
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	9.0 A
			RATED VOLTAGE [V]	600 V
			TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67



SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:
1. "/S1055" DESIGNATES RED OVERMOLD.

NOTES: 1. "/S1055" DESIGNATES RED OVERMOLD.					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us									
					1.															
					2.															
					3.															
4.																				
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT		NF		DATE 07/14/17		DESCRIPTION XSH-RSM-2RKM 30/S1055					
					SEE SPECIFICATIONS				APVD		K.Y.		SCALE 1=1.5							
					FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETERS						IDENTIFICATION NO.		REV			
					SEE SPECIFICATIONS										U2-29509		A			
A					DRAWING RELEASE					NF		08/09/17								
REV					DESCRIPTION					BY		DATE		ECO NO.						