



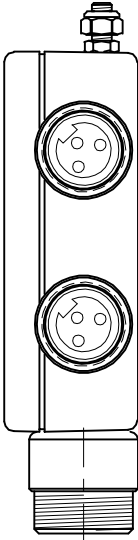
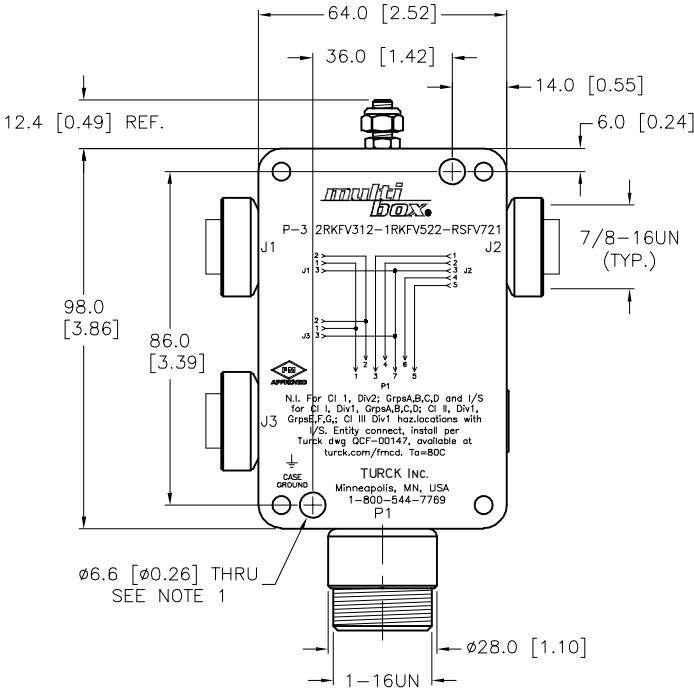
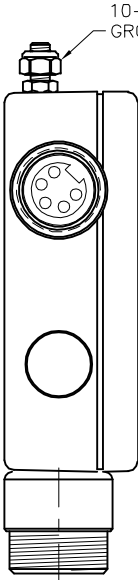


MALE END VIEW (P1)	FEMALE END VIEW (J1,J3)	FEMALE END VIEW (J2)	SPECIFICATIONS	
			HOUSING MATERIAL	DIE-CAST ALUMINUM ALLOY
			HOUSING FINISH/COLOR	POWDER COAT/BLACK
			RECEPTACLE HOUSINGS	STAINLESS STEEL/PASSIVATED
			CONTACT CARRIERS	TPU
			CONTACTS	BRASS/GOLD
			OPERATING VOLTAGE	300 V
			OPERATING CURRENT	7.0 AMPS PER PORT
			PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
			OPERATING TEMPERATURE	-40°C TO +80°C (-40°F TO +176°F)


10-32 ENCLOSURE GROUND STUD

WIRING DIAGRAM

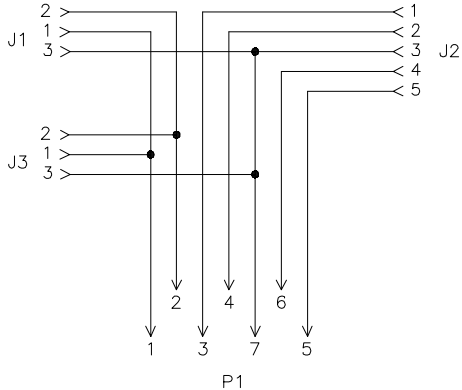

NOTES:

1. CLEARANCE HOLE FOR 1/4-20 MOUNTING SCREWS (2 NOT INCLUDED).

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.		DRFT	NF	DATE	05/12/17
2.		APVD	F.M.	SCALE	1=2.0
3.		UNIT OF MEASUREMENT		DESCRIPTION	
4.		MILLIMETER [INCH]		P-3 2RK FV312-1RK FV522-RSFV721	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	CONTACT TURCK FOR MORE INFORMATION		IDENTIFICATION NO.	
SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING		U2-30820	
FINISH	SEE SPECIFICATIONS	FILE: U2-30820		REV	
		SHEET 1 OF 1		B	