



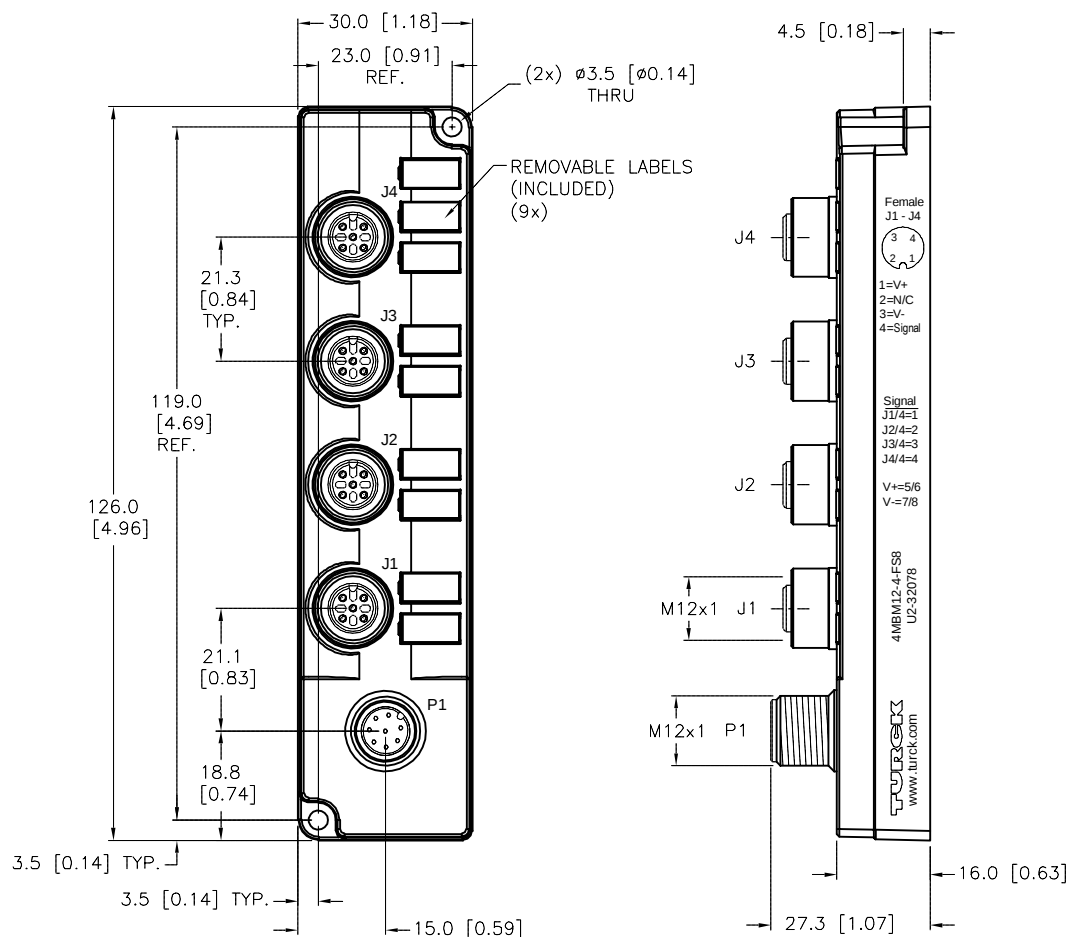


SPECIFICATIONS	
MATERIAL	
HOUSING/COLOR	NYLON/BLACK
RECEPTACLES	BRASS/NICKEL
CONTACT CARRIERS/COLOR	NYLON/BLACK
CONTACTS	BRASS/GOLD
SEALING RING	FPM/FKM
ELECTRICAL DATA	
OPERATING VOLTAGE [V]	48 VDC
OPERATING CURRENT [A]	4.0 AMPS PER PORT
TOTAL CURRENT [A]	2.0 AMPS USING SINGLE POWER PAIR 4.0 AMPS USING DUAL POWER PAIR
MECHANICAL DATA	
PROTECTION CLASS	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-30°C to +80°C (-25°F to +176°F)


WIRING DIAGRAM

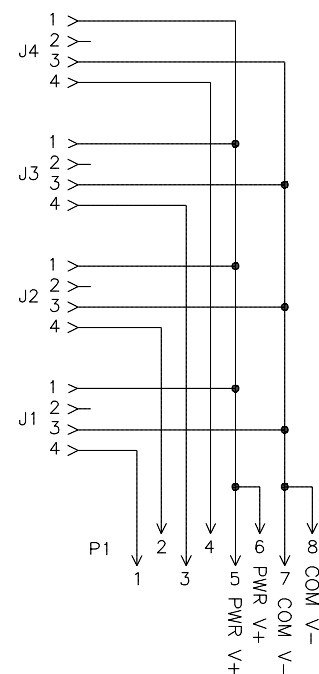

MALE END VIEW (P1)



FEMALE END VIEW (J1-J4)



SOURCE DRAWING - FOR REFERENCE ONLY



CLOSURE CAPS
(2 INCLUDED)

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us					
1.											
2.		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION		DRFT	RDS	DATE	05/07/18			DESCRIPTION 4MBM12-4-FS8	
3.				APVD		SCALE	1=1.3				
4.				UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO. U2-32078		REV A	
MATERIAL		SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING		FILE: U2-32078					
FINISH		SEE SPECIFICATIONS									

A	DRAWING RELEASE	*KH	11/12/18	
REV	DESCRIPTION	BY	DATE	ECO. NO.