

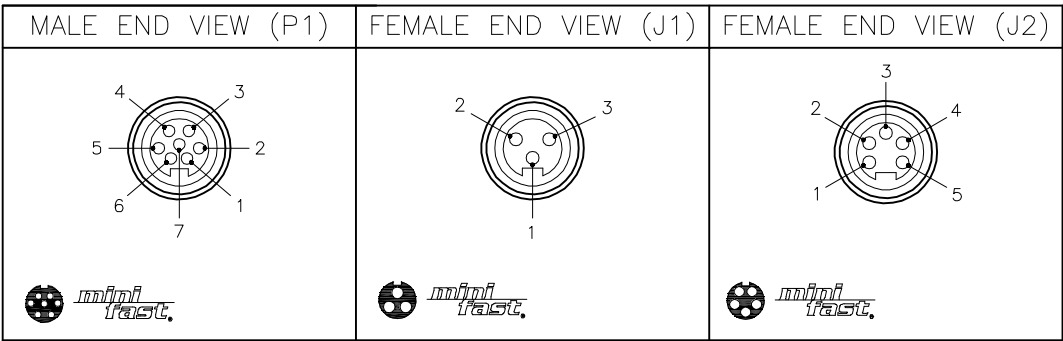


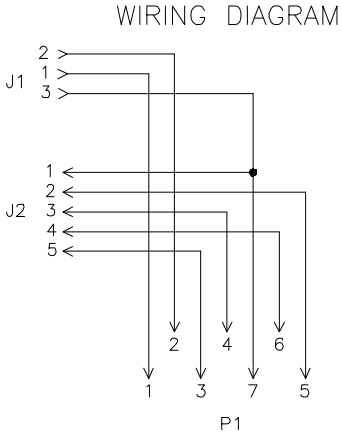

SPECIFICATIONS	
HOUSING MATERIAL	DIE-CAST ALUMINUM ALLOY
HOUSING FINISH/COLOR	POWDER COAT/BLACK
RECEPTACLE HOUSINGS	STAINLESS STEEL/PASSIVATED
CONTACT CARRIERS	TPU
CONTACTS	BRASS/GOLD
OPERATING VOLTAGE	300 V
OPERATING CURRENT	7.0 AMPS PER PORT
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C TO +80°C (-40°F TO +176°F)

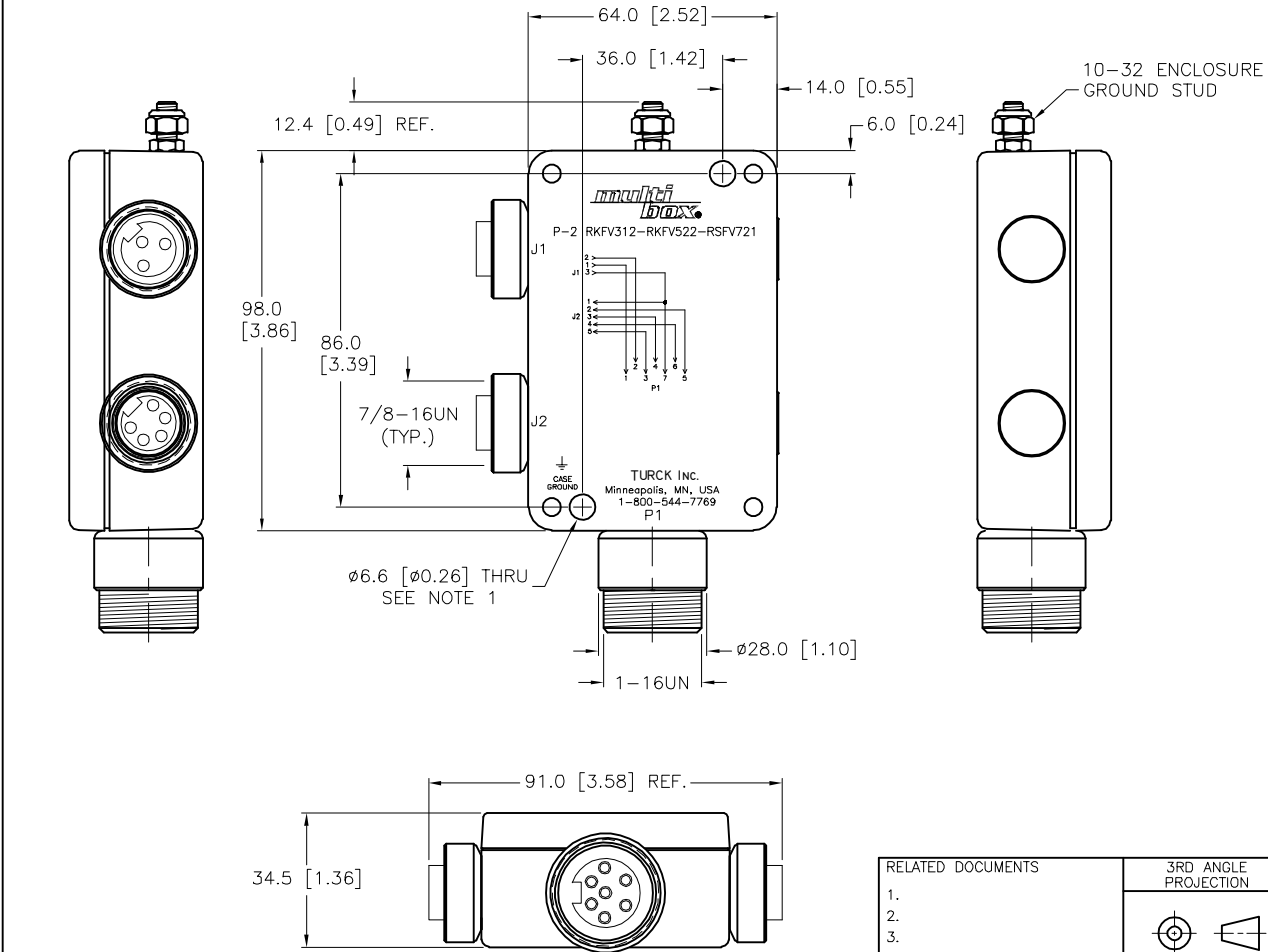

NOTES:

1. CLEARANCE HOLE FOR 1/4-20 MOUNTING SCREWS (2 NOT INCLUDED).

SOURCE DRAWING - FOR REFERENCE ONLY

34.5 [1.36]					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
					1. 2. 3. 4.								
NOTES: 1. CLEARANCE HOLE FOR 1/4-20 MOUNTING SCREWS (2 NOT INCLUDED).					MATERIAL		DRFT ER		DATE 08/29/18		DESCRIPTION		
					SEE SPECIFICATIONS		APVD N.M.		SCALE 1=2.0		P-2 RK FV312-RKFV593-RSFV721		
					FINISH		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV
					SEE SPECIFICATIONS						CONTACT TURCK FOR MORE INFORMATION		U2-32788
B		UPDATE TEMP SPEC			RDS	03/26/19	68987		DO NOT SCALE THIS DRAWING		FILE: U2-32788		SHEET 1 OF 1
REV		DESCRIPTION			BY	DATE	ECO NO.						