


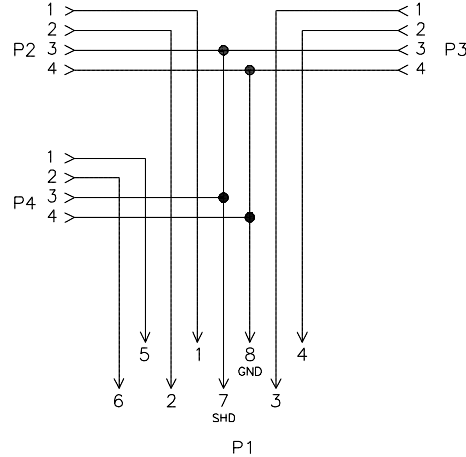
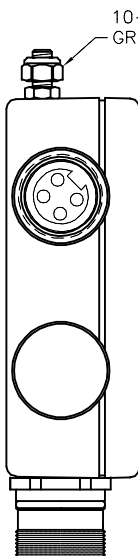
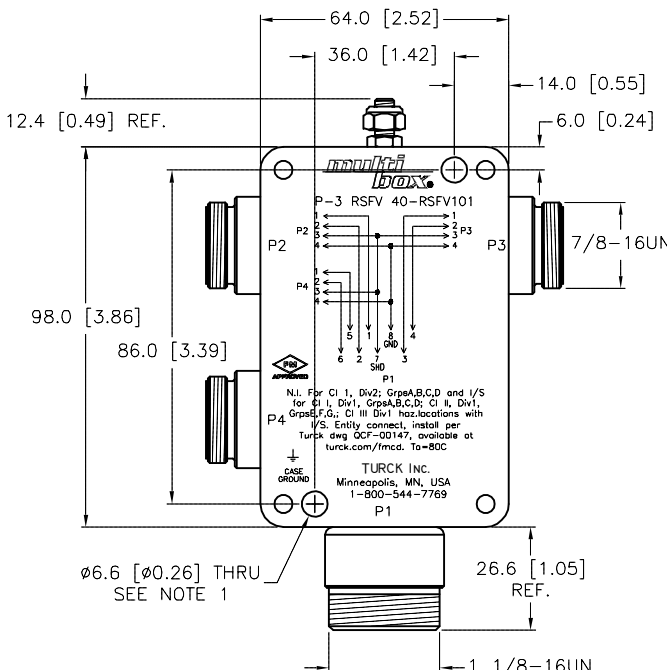


MALE END VIEW (P1)		MALE PIN-OUT (P2-P4)		SPECIFICATIONS																							
 1 = PORT 1-1 2 = PORT 1-2 3 = PORT 2-1 4 = PORT 2-2 5 = PORT 3-1 6 = PORT 3-2 7 = SHIELD 8 = GROUND 9 = N/C 10 = N/C 		 1 = BLUE (V-) 2 = BROWN (V+) 3 = DRAIN (SHD) 4 = GREEN/YELLOW (GND) 		<table><tr><td colspan="2">SPECIFICATIONS</td></tr><tr><td>HOUSING MATERIAL</td><td>DIE-CAST ALUMINUM ALLOY</td></tr><tr><td>HOUSING FINISH/COLOR</td><td>POWDER COAT/BLACK</td></tr><tr><td>RECEPTACLE HOUSING MATERIAL/FINISH</td><td>STAINLESS STEEL/PASSIVATED</td></tr><tr><td>CONTACT CARRIERS/COLOR (J1-J4)</td><td>TPU/BLACK</td></tr><tr><td>CONTACT CARRIER/COLOR (P1)</td><td>NYLON or PBT/WHITE</td></tr><tr><td>CONTACTS</td><td>BRASS/GOLD</td></tr><tr><td>OPERATING VOLTAGE</td><td>250 VAC/300 VDC</td></tr><tr><td>OPERATING CURRENT</td><td>4.0 AMPS PER PORT, 8.0 AMPS TOTAL</td></tr><tr><td>PROTECTION CLASS to DIN 40050</td><td>IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED</td></tr><tr><td>OPERATING TEMPERATURE</td><td>-50°C to +105°C (-58°F to +221°F)</td></tr></table>		SPECIFICATIONS		HOUSING MATERIAL	DIE-CAST ALUMINUM ALLOY	HOUSING FINISH/COLOR	POWDER COAT/BLACK	RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED	CONTACT CARRIERS/COLOR (J1-J4)	TPU/BLACK	CONTACT CARRIER/COLOR (P1)	NYLON or PBT/WHITE	CONTACTS	BRASS/GOLD	OPERATING VOLTAGE	250 VAC/300 VDC	OPERATING CURRENT	4.0 AMPS PER PORT, 8.0 AMPS TOTAL	PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED	OPERATING TEMPERATURE	-50°C to +105°C (-58°F to +221°F)
SPECIFICATIONS																											
HOUSING MATERIAL	DIE-CAST ALUMINUM ALLOY																										
HOUSING FINISH/COLOR	POWDER COAT/BLACK																										
RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED																										
CONTACT CARRIERS/COLOR (J1-J4)	TPU/BLACK																										
CONTACT CARRIER/COLOR (P1)	NYLON or PBT/WHITE																										
CONTACTS	BRASS/GOLD																										
OPERATING VOLTAGE	250 VAC/300 VDC																										
OPERATING CURRENT	4.0 AMPS PER PORT, 8.0 AMPS TOTAL																										
PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED																										
OPERATING TEMPERATURE	-50°C to +105°C (-58°F to +221°F)																										

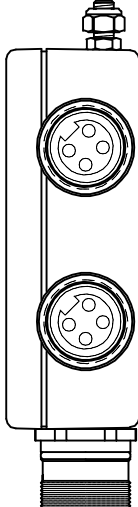

10-32 ENCLOSURE GROUND STUD


WIRING DIAGRAM

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. CLEARANCE HOLE FOR (2X) 1/4-20 MOUNTING SCREWS. (NOT INCLUDED)

KEYWAY CAN BE AT ANY POSITON

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.		DRFT	NF	DATE	02/02/18
2.		APVD	D.A.	SCALE	1=2.0
3.	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		DESCRIPTION	
4.		MILLIMETER [INCH]		P-3RSFV 40-RSFV 101	
MATERIAL	CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
SEE SPECIFICATIONS				U2-33501	
FINISH	SEE SPECIFICATIONS			REV	
				A	
REV		DESCRIPTION		FILE: U2-33501	
NF		01/11/19		ECO. NO.	
BY		DATE		SHEET 1 OF 1	