


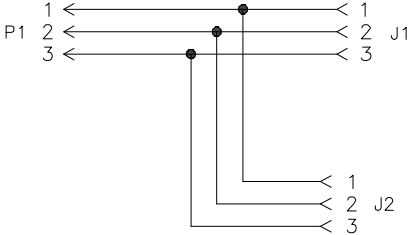



MALE END VIEW (P1)	FEMALE END VIEW (J1-J2)	WIRING DIAGRAM	SPECIFICATIONS	
 1 (LONG)			CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
			MOLDED BODY MATERIAL/COLOR	TPU/RED
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	9.0 A
			RATED VOLTAGE [V]	600 V
			TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

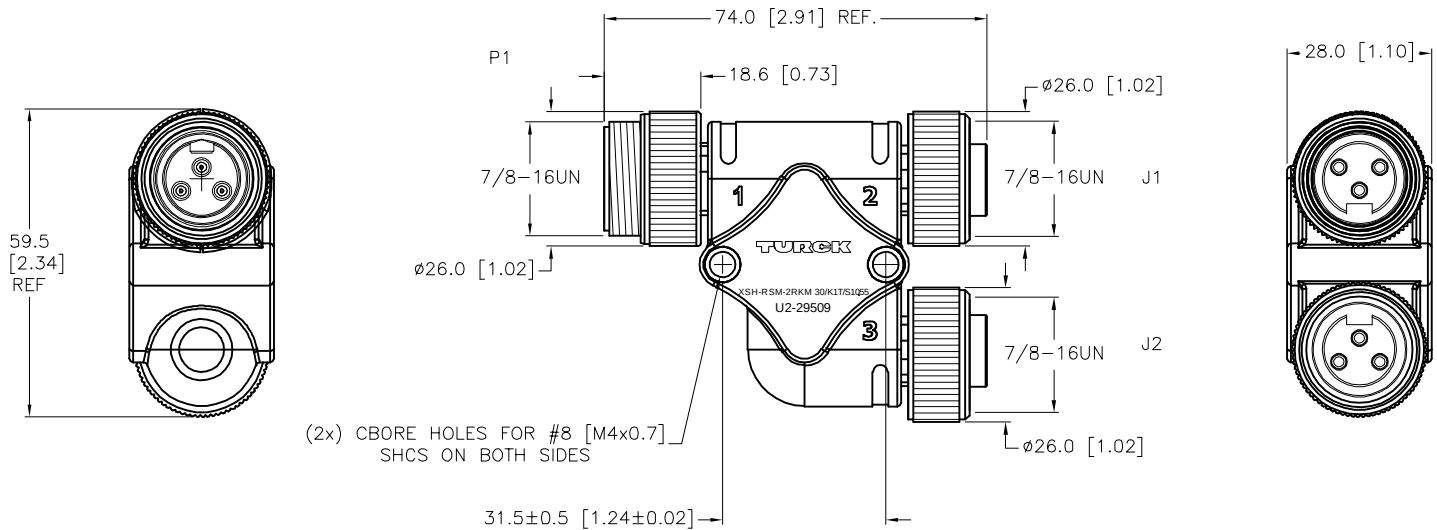

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "/K1T" DESIGNATES KEYWAY OF CONNECTOR #1 ROTATED TO TOP OF ASSEMBLY. (180° FROM STANDARD).
2. "/S1055" DESIGNATES RED OVERMOLD.

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.						DRFT NF		DATE 03/05/19	
MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD E.S.		SCALE 1=1.5	
FINISH				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS						MILLIMETERS		XSH-RSM-2RKM 30/K1T/S1055	
SEE SPECIFICATIONS						DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
								U2-34047	
								REV	
								A	
A DRAWING RELEASE				NF		03/14/19		FILE: U2-34047	
REV DESCRIPTION				BY		DATE		ECO NO.	
								SHEET 1 OF 1	