
MALE END VIEW	
JUMPER (PINS 1,2) 2	
eniro Fast.	

SPECIFICATIONS CONTACT CARRIER MATERIAL NYLON OR TPU MOLDED HEAD MATERIAL/COLOR TPU/YELLOW CONTACT MATERIAL/PLATING BRASS/GOLD COUPLING NUT MATERIAL/PLATING BRASS/NICKEL RATED CURRENT [A] 4.0 A RATED VOLTAGE [V] 250 V TEMPERATURE PATING -40°C to +80°C (-40°E to +176°E)	1		
MOLDED HEAD MATERIAL/COLOR CONTACT MATERIAL/PLATING COUPLING NUT MATERIAL/PLATING RATED CURRENT [A] RATED VOLTAGE [V] TPU/YELLOW BRASS/GOLD BRASS/NICKEL 4.0 A 250 V	SPECIFICATIONS		
MOLDED HEAD MATERIAL/COLOR CONTACT MATERIAL/PLATING COUPLING NUT MATERIAL/PLATING RATED CURRENT [A] RATED VOLTAGE [V] TPU/YELLOW BRASS/GOLD BRASS/NICKEL 4.0 A 250 V			
CONTACT MATERIAL/PLATING BRASS/GOLD COUPLING NUT MATERIAL/PLATING BRASS/NICKEL RATED CURRENT [A] 4.0 A RATED VOLTAGE [V] 250 V	CONTACT CARRIER MATERIAL	NYLON OR TPU	
COUPLING NUT MATERIAL/PLATING BRASS/NICKEL RATED CURRENT [A] 4.0 A RATED VOLTAGE [V] 250 V	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	
RATED CURRENT [A] 4.0 A RATED VOLTAGE [V] 250 V	CONTACT MATERIAL/PLATING	BRASS/GOLD	
RATED VOLTAGE [V] 250 V	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	
	RATED CURRENT [A]	4.0 A	
TEMPERATURE RATING -40°C (-40°E to +176°E)	RATED VOLTAGE [V]	250 V	
1 40 C (0 100 C (401 C 0 11701)	TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)	
PROTECTION CLASS NEMA 1,3,4,6P AND IEC IP68, IP69K	PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K	



SOURCE DRAWING - FOR REFERENCE ONLY

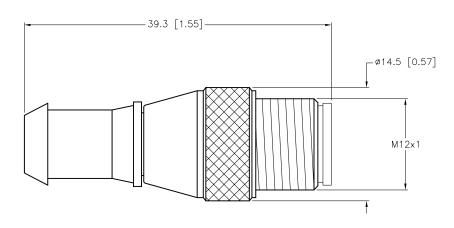