



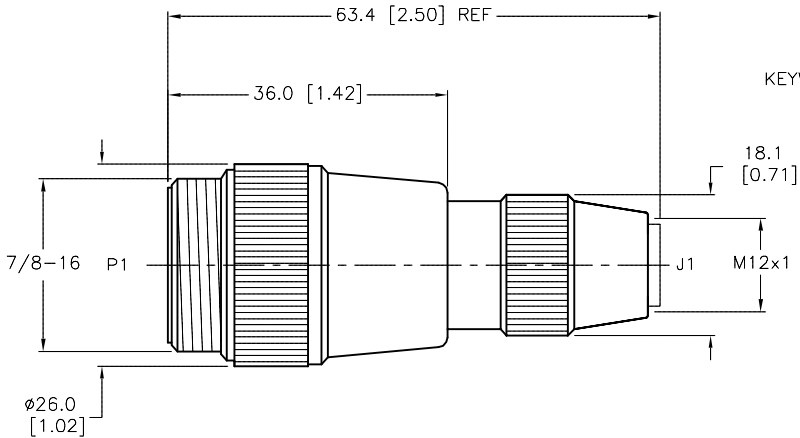




MALE END VIEW (P1)	WIRING DIAGRAM	FEMALE END VIEW (J1)	SPECIFICATIONS	
 	P1 J1 1 < 1 2 < 2 3 < 3 4 < 4 5 < 5	 	CONTACT CARRIER MATERIAL	TPU
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	4.0 A
			RATED VOLTAGE [V]	250 V
			TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	MEETS IEC IP67



KEYWAYS NOT CRITICAL



SOURCE DRAWING - FOR REFERENCE ONLY

					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com TURCK INC High Technology Sensors and Automation Controls															
					1. RSM 57-FK 4.5 (U0102-4)																					
					2.																					
					3.																					
					4.				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT		RDS	DATE		04/03/07		DESCRIPTION RSM 50-FK 4.5								
					MATERIAL						APVD		SCALE		1 = 1.0											
					FINISH						CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U2092-50				REV D							
D		DRAWING PROCESSED AS PART OF ECO 33971			CBM		04/07/11		33971												FILE: U2092-50				SHEET 1 OF 1	
REV		DESCRIPTION			BY		DATE		ECO NO.																	