







FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
 <p>1 = BROWN 2 = N/C 3 = BLUE 4 = BLACK</p>	 <p>1 = BROWN 2 = N/C 3 = BLUE 4 = BLACK</p>	CONTACT CARRIER MATERIAL	NYLON OR TPU
		MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	250 V
		OUTER JACKET MATERIAL/COLOR	TPU/GRAY
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	3x22 AWG
		TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
		PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K



NOTES:

1. "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE.
2. NUMBER OF COILS IS REFERENCE ONLY.

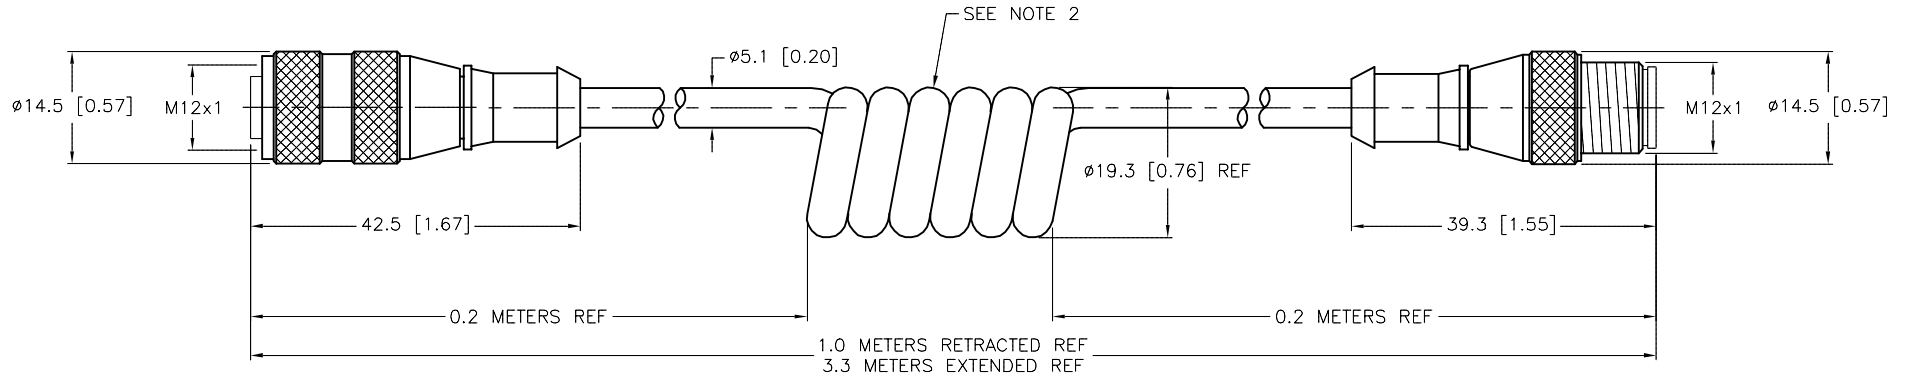SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE. 2. NUMBER OF COILS IS REFERENCE ONLY.	RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com				
	1. 2. 3. 4.						TURCK INC <i>High Technology Sensors and Automation Controls</i>						
	MATERIAL				DRFT						RWC		DATE 02/19/07
	SEE SPECIFICATIONS				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=1.0		RK 4T-3.3-RS 4T/S90-SP		
	FINISH				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		MILLIMETER [INCH]		IDENTIFICATION NO.		REV
SEE SPECIFICATIONS								DO NOT SCALE THIS DRAWING		U2151-34		F	
F	DRAWING PROCESSED AS PART OF ECO 39311			KMY	10/03/12	39311							
REV	DESCRIPTION			BY	DATE	ECO NO.	FILE: U2151-34					SHEET 1 OF 1	