




MALE END VIEW

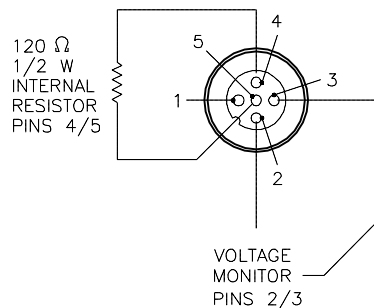



DeviceNet™

SPECIFICATIONS

CONTACT CARRIER MATERIAL	TPU
MOLDED HEAD MATERIAL/COLOR	TPU/BLE-GRAY, CLEAR
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED VOLTAGE [V]	10-30 VDC (7.6 VDC MAX. ON PINS WITH RESISTOR)
INTERNAL TERMINATING RESISTOR	120 Ω (1/2 W)
VOLTAGE MONITORING (BUS POWER)	GREEN: CORRECT POLARITY RED: REVERSED POLARITY
TEMPERATURE RATING	-40°C to +80°C (-40°F to +170°F)
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K

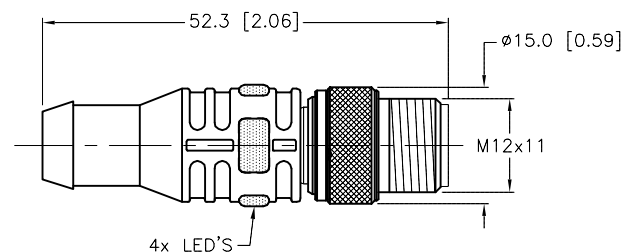

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
	MATERIAL	DRFT GAR	DATE 06/11/08						DESCRIPTION RSE 57-TR2/VM	
	FINISH	APVD	SCALE 1=1.0							
ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U2251-115		REV D				
							CONTACT TURCK FOR MORE INFORMATION			
		DO NOT SCALE THIS DRAWING		FILE: U2251-115		SHEET 1 OF 1				

D	DRAWING PROCESSED AS PART OF ECO 33971	CBM	04/07/11	33971
REV	DESCRIPTION	BY	DATE	ECO NO.