


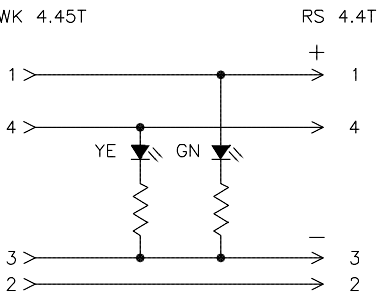
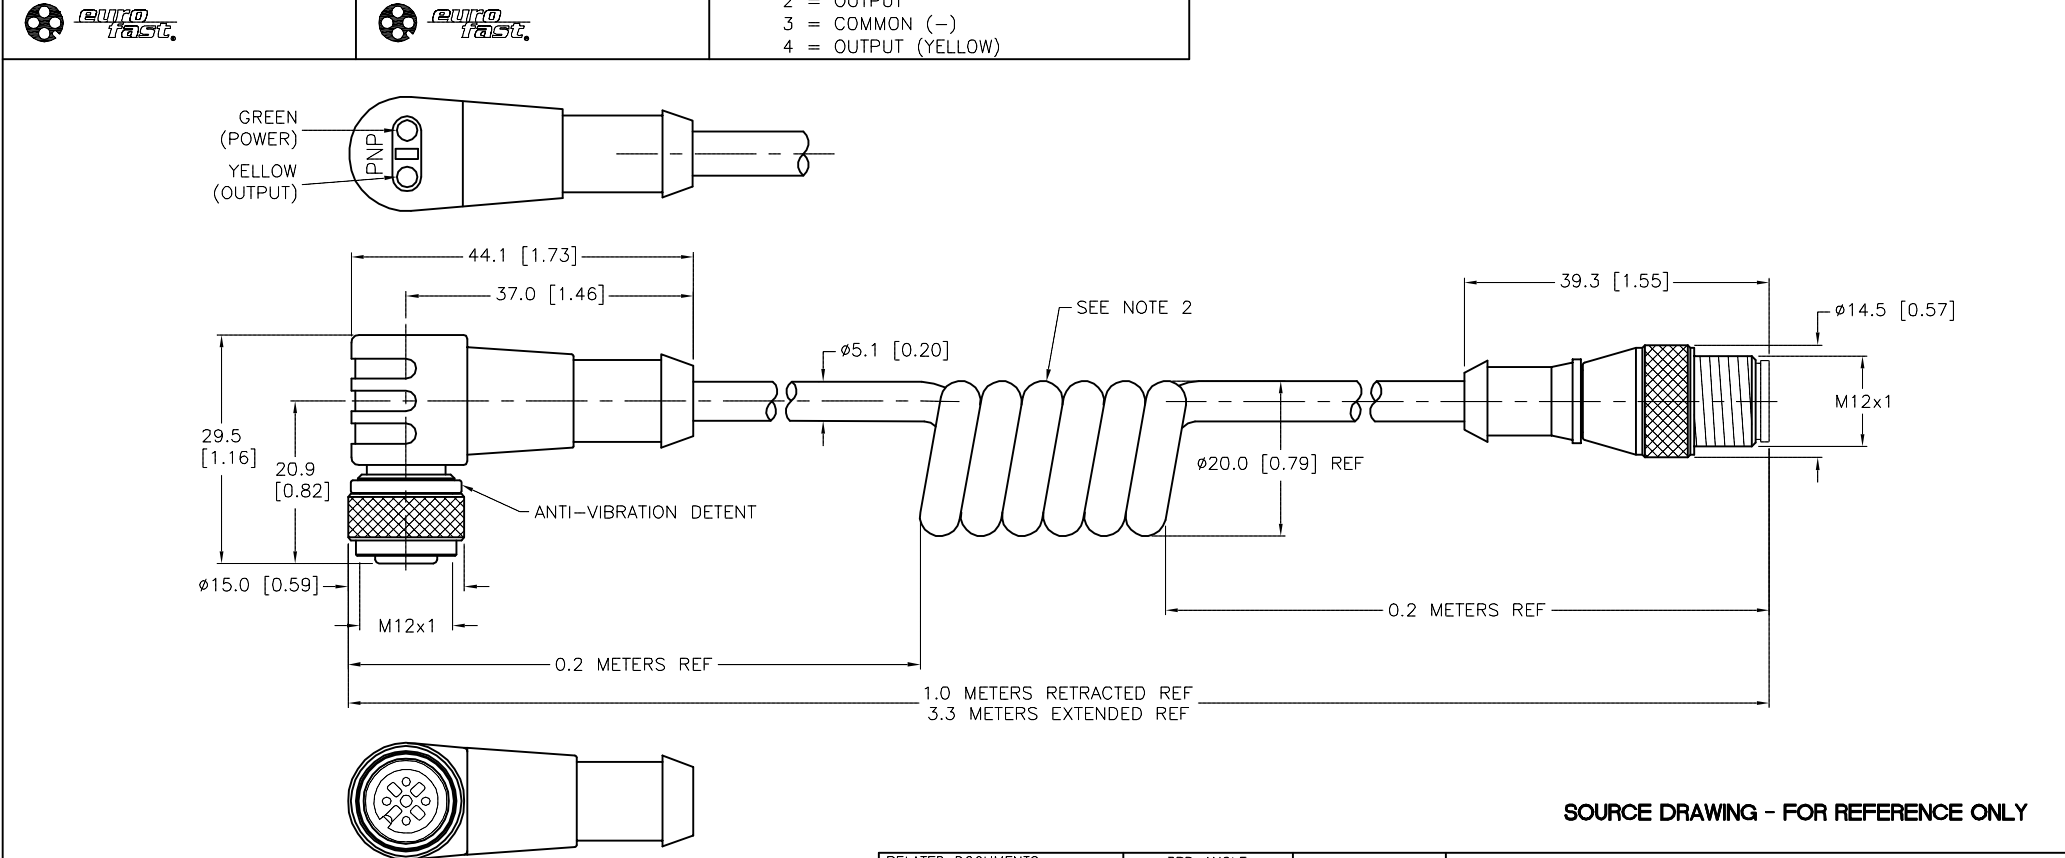


FEMALE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS																						
 <p>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK</p>	 <p>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK</p>	 <p>1 = VOLTAGE (+) (GREEN) 2 = OUTPUT 3 = COMMON (-) 4 = OUTPUT (YELLOW)</p>	<table border="1"> <tr> <td>CONTACT CARRIER MATERIAL</td> <td>TPU</td> </tr> <tr> <td>MOLDED HEAD MATERIAL/COLOR</td> <td>TPU/CLEAR (WK), YELLOW (RS 4.4T)</td> </tr> <tr> <td>CONTACT MATERIAL/PLATING</td> <td>BRASS/GOLD</td> </tr> <tr> <td>COUPLING NUT MATERIAL/PLATING</td> <td>BRASS/NICKEL</td> </tr> <tr> <td>RATED CURRENT [A]</td> <td>4.0 A LOAD CURRENT</td> </tr> <tr> <td>RATED VOLTAGE [V]</td> <td>10-30 VDC</td> </tr> <tr> <td>OUTER JACKET MATERIAL/COLOR</td> <td>TPU/GRAY</td> </tr> <tr> <td>CONDUCTOR INSULATION MATERIAL</td> <td>PVC</td> </tr> <tr> <td>NUMBER OF CONDUCTORS [AWG]</td> <td>4x22 AWG</td> </tr> <tr> <td>TEMPERATURE RANGE</td> <td>-40°C to +80°C (-40°F to +176°F)</td> </tr> <tr> <td>PROTECTION CLASS</td> <td>MEETS NEMA 1,3,4,6P AND IEC IP68</td> </tr> </table>	CONTACT CARRIER MATERIAL	TPU	MOLDED HEAD MATERIAL/COLOR	TPU/CLEAR (WK), YELLOW (RS 4.4T)	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	4.0 A LOAD CURRENT	RATED VOLTAGE [V]	10-30 VDC	OUTER JACKET MATERIAL/COLOR	TPU/GRAY	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	4x22 AWG	TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
CONTACT CARRIER MATERIAL	TPU																								
MOLDED HEAD MATERIAL/COLOR	TPU/CLEAR (WK), YELLOW (RS 4.4T)																								
CONTACT MATERIAL/PLATING	BRASS/GOLD																								
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																								
RATED CURRENT [A]	4.0 A LOAD CURRENT																								
RATED VOLTAGE [V]	10-30 VDC																								
OUTER JACKET MATERIAL/COLOR	TPU/GRAY																								
CONDUCTOR INSULATION MATERIAL	PVC																								
NUMBER OF CONDUCTORS [AWG]	4x22 AWG																								
TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)																								
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68																								



SOURCE DRAWING - FOR REFERENCE ONLY

- NOTES:
1. "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE.
 2. NUMBER OF COILS IS REFERENCE ONLY.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1.		DRFT	RWC	DATE	02/19/07
2.		APVD		SCALE	1=1.0
3.	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		DESCRIPTION	
4.		MILLIMETER [INCH]		WK 4.4T-3.3-P7X2-RS 4.4T/S90-SP	
MATERIAL	CONTACT TURCK FOR MORE INFORMATION	IDENTIFICATION NO.		REV	
SEE SPECIFICATIONS		U2291-1		B	
FINISH		DO NOT SCALE THIS DRAWING		FILE: U2291-1	
SEE SPECIFICATIONS				SHEET 1 OF 1	

B	DRAWING PROCESSED AS PART OF ECO 33971	CBM	04/07/11	33971
REV	DESCRIPTION	BY	DATE	ECO NO.