


MALE END VIEW


FEMALE END VIEW

TYPICAL PANEL CUTOUT


SPECIFICATIONS






1 = BLUE (- VOLTAGE)
2 = BROWN (+ VOLTAGE)
3 = BARE (SHIELD)
4 = GREEN/YELLOW (GROUND)



1 = BLUE (- VOLTAGE)
2 = BROWN (+ VOLTAGE)
3 = BARE (SHIELD)
4 = GREEN/YELLOW (GROUND)

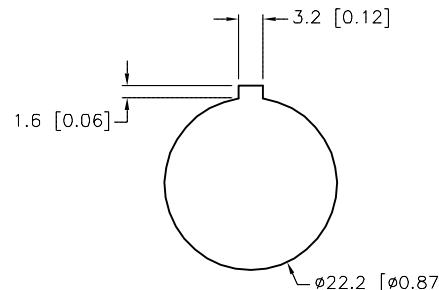

CONTACT CARRIER MATERIAL	TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	600 V
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4 AND IEC IP67
ACCOMMODATES WALL THICKNESS	.040" (1.0 mm) to .875" (22.2 mm)
GASKET MATERIAL	NITRILE

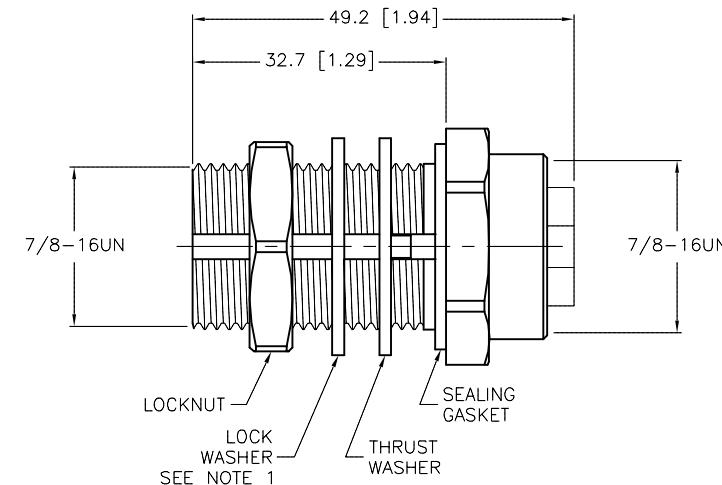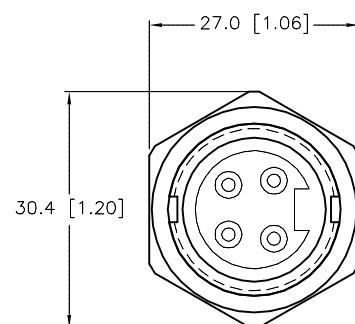FOUNDATION™
fieldbusFOUNDATION™
fieldbus

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	DRFT JBJ APVD	DATE 10/7/98 SCALE 1=1	DESCRIPTION RSF RKF 49/22	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
						UNIT OF MEASUREMENT	MILLIMETER [INCH]
						IDENTIFICATION NO.	U2309-49
						REV	E
E	DRAWING PROCESSED AS PART OF ECO 38872	KMY	05/10/12	38872	DO NOT SCALE THIS DRAWING	FILE: U2309-49	SHEET 1 OF 1
REV	DESCRIPTION	BY	DATE	ECO NO.			

NOTE(S): GENERAL

1. LOCK WASHER TO BE INSTALLED ON THREADS AS SHOWN.