






MALE END VIEW



FEMALE END VIEW




TYPICAL PANEL CUTOUT

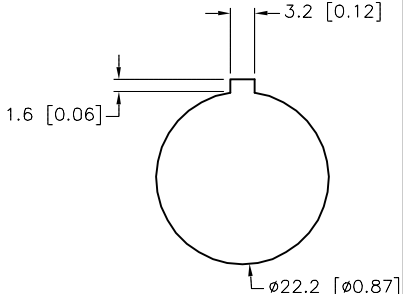



SPECIFICATIONS

CONTACT CARRIER MATERIAL	TPU/BUE-GRAY
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	600 V
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	NEMA 1,3,4 AND IEC IP67
ACCOMODATES WALL THICKNESS	.040" (1.0 mm) to .875" (22.2 mm)
GASKET MATERIAL	BUNA N

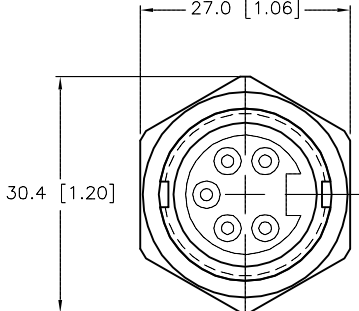

LOCKNUT AND WASHERS
NOT SHOWN FOR
CLARITY

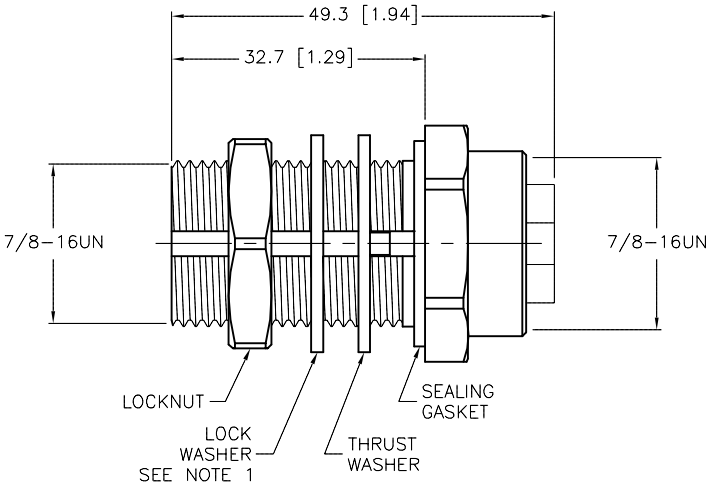



SOURCE DRAWING - FOR REFERENCE ONLY


NOTE(S):
1. LOCK WASHER TO BE INSTALLED ON THREADS AS SHOWN.

E	UPDATE COLOR	NF	02/26/15	49085
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS

1.
2.
3.
4.

3RD ANGLE PROJECTION



THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

DRFT IK
APVD

DATE 5/09/97
SCALE 1=1.0

UNIT OF MEASUREMENT
MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

TURCK INC
High Technology Sensors and Automation Controls

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
turck.com

DESCRIPTION
RSF RKF 57/22

IDENTIFICATION NO.
U2309-6

REV
E