


FEMALE END VIEW




- 1 = GREEN/YELLOW
- 2 = BROWN
- 3 = BLUE



ACCEPTED
 NAME _____
 SIGNATURE _____
 DATE _____
***** PENDING MFG VERIFICATION *****

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/YELLOW
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	300 V
OUTER JACKET MATERIAL/COLOR	TPU/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	3x18 AWG
TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

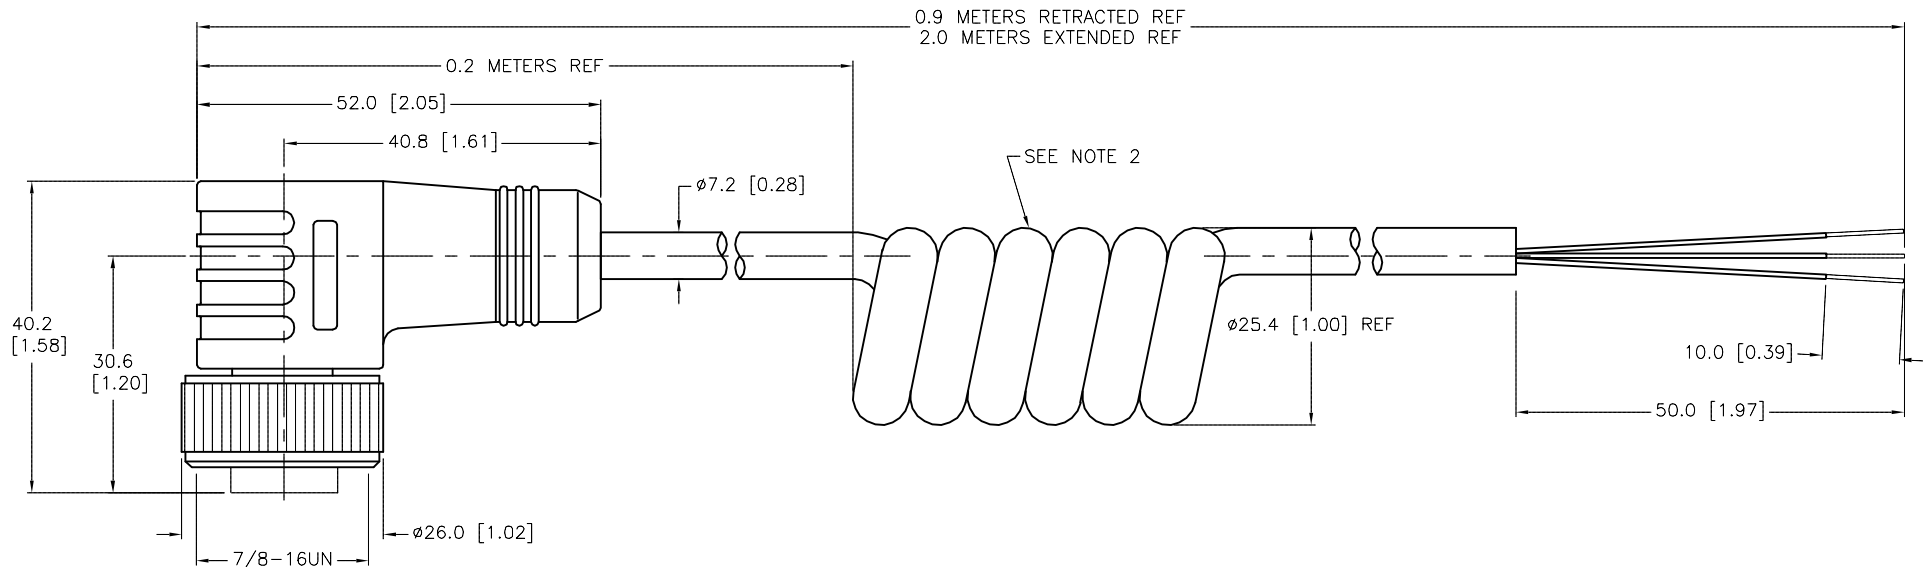

SOURCE DRAWING - FOR REFERENCE ONLY

- NOTES:
1. "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE.
 2. NUMBER OF COILS IS REFERENCE ONLY.

RELATED DOCUMENTS 1. NOTE 2. PRELIMINARY SPECIFICATIONS 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
	MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT RWC APVD	DATE 02/22/07 SCALE 1=1.0	DESCRIPTION WKM 30-2M/S90-SP
FINISH SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U2310-12	REV D
DO NOT SCALE THIS DRAWING		FILE: U2310-12		SHEET 1 OF 1	

D	REMOVE PIGTAIL TOLERANCE	CK	01/20/11	33990
REV	DESCRIPTION	BY	DATE	ECO NO.