
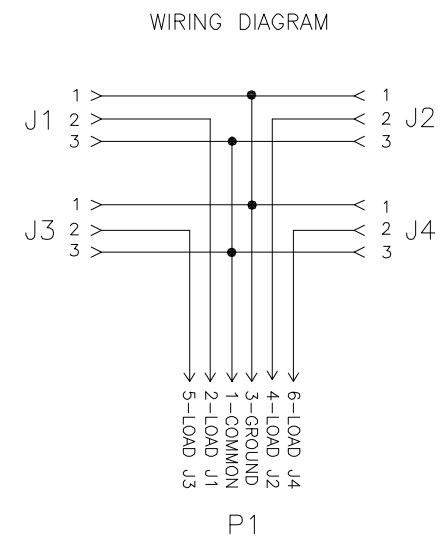


SPECIFICATIONS	
HOUSING MATERIAL	ALUMINUM ALLOY
HOUSING FINISH/COLOR	EPOXY/BLACK
CONTACT CARRIERS	TPU
CONTACTS	BRASS/GOLD
OPERATING VOLTAGE	250 VAC/300 VDC
OPERATING CURRENT	4 A PER PORT, 9.0 A TOTAL
PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to 105°C (-40°F to 221°F)

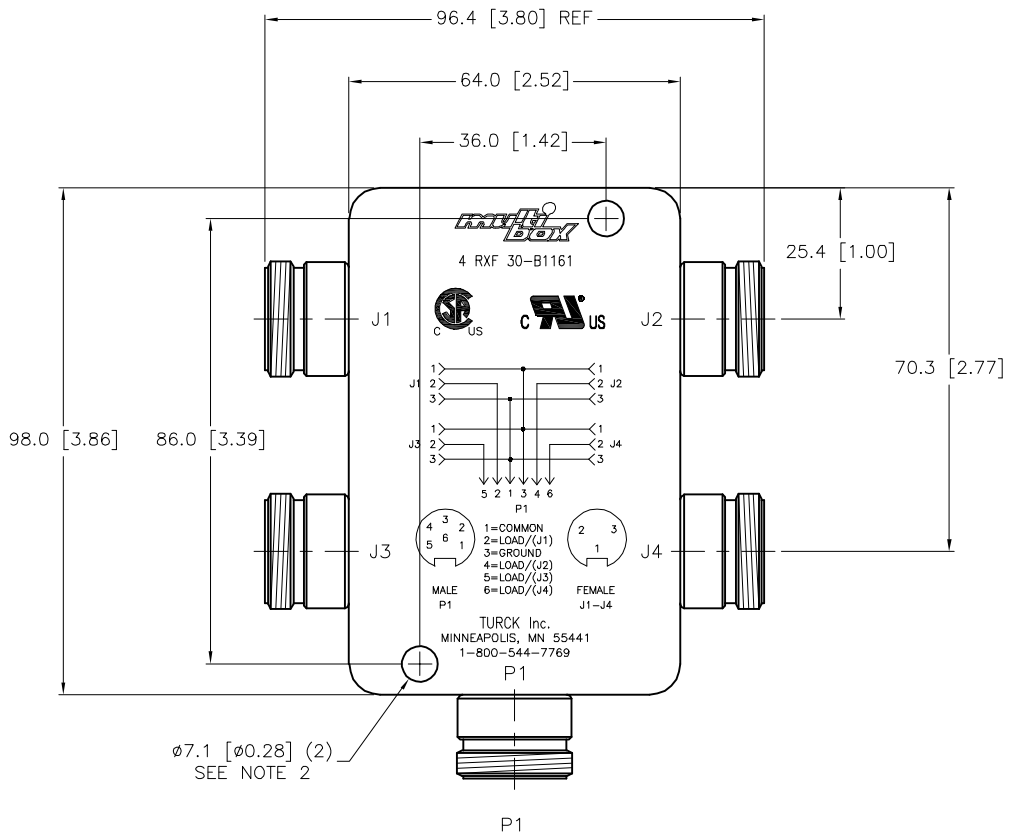

SOURCE DRAWING - FOR REFERENCE ONLY

- NOTES:
- BOX HEIGHT IS 34.5 [1.36] NOMINAL.
 - CLEARANCE HOLE FOR 1/4-20 MOUNTING SCREWS (NOT INCLUDED).

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
			TURCK	
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT RWC	DATE 05/16/07	DESCRIPTION 4 RXF 30-B1161
FINISH SEE SPECIFICATIONS		APVD	SCALE 1=1.5	
		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U2364
		CONTACT TURCK FOR MORE INFORMATION		REV C
		DO NOT SCALE THIS DRAWING		FILE: U2364
				SHEET 1 OF 1

C	UPDATED LENGTH TO 36.0 FOR HOLE	ER	09/03/21	77012
REV	DESCRIPTION	BY	DATE	ECO NO.