



MALE END VIEW







BOARD LAYOUT 2:1



SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON
CONTACT MATERIAL/PLATING	BRASS/GOLD
WASHER MATERIAL	NYLON
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
HOUSING/LOCKNUT MATERIAL/PLATING	BRASS/NICKEL
CONDUCTORS	PCB PINS
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
MAX. PANEL THICKNESS	3.0mm [0.12"]

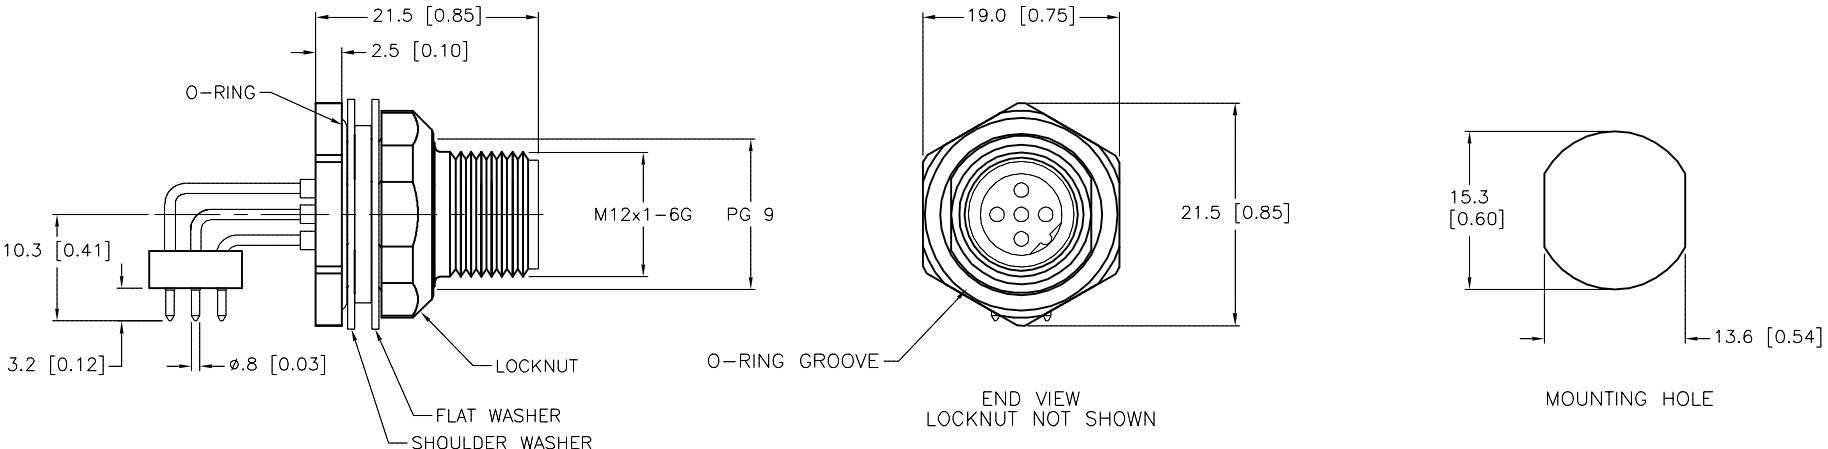

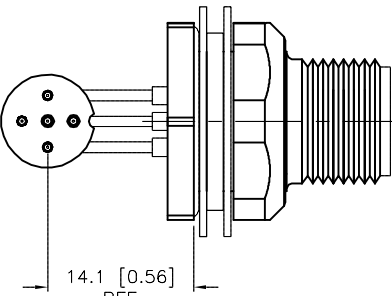

NOTE: SPACER IS PERMANENTLY ATTACHED TO PINS FOR ALIGNMENT.

E	UPDATE KEYWAY ORIENTATION TO MATCH MFG DRAWING	RDS	06/15/16	55309
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS

1.

2.

3.

4.


MATERIAL

BRASS

FINISH

NICKEL-PLATED

3RD ANGLE PROJECTION



ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT GC

APVD GC

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
turck.com

TURCK INC

High Technology Sensors and Automation Controls

DATE

3/9/99

SCALE

1=.75

DESCRIPTION

WFSDW 45-PCB

IDENTIFICATION NO.

U2369-03

REV

E

FILE: U2369-03

SHEET 1 OF 1