


MALE END VIEW

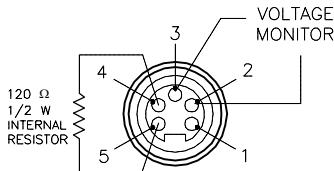


1 = BARE (SHIELD)
 2 = RED (+ VOLTAGE)
 3 = BLACK (- VOLTAGE)
 4 = WHITE (CAN_H)
 5 = BLUE (CAN_L)


 **minifast** **DeviceNet**™

SPECIFICATIONS

MOLDED BODY MATERIAL\COLOR	TPU\CLEAR
CONTACT CARRIER MATERIAL\COLOR	TPU\BLUE-GRAY
CONTACT MATERIAL\PLATING	BRASS/GOLD
COUPLING NUT MATERIAL	STAINLESS STEEL
RATED VOLTAGE [V]	24 VDC (7.6 VDC MAX. ON PINS WITH RESISTOR)
INTERNAL TERMINATING RESISTOR	120Ω, 1/2 W
VOLTAGE MONITORING (BUS POWER)	GREEN: CORRECT POLARITY RED: REVERSED POLARITY
TEMPERATURE RATING	-40°C to +80°C (-40°F to +170°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

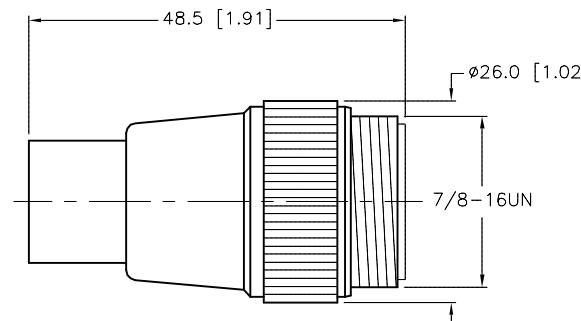

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.	2.		DRFT	DF	DATE 02/25/05	DESCRIPTION
3.	4.		APVD		SCALE 1=1.0	RSV 57-TR2/VM
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT		
FINISH		CONTACT TURCK FOR MORE INFORMATION		MILLIMETER [INCH]		
C DRAWING PROCESSED AS PART OF ECO 33971		CBM 04/07/11		DO NOT SCALE THIS DRAWING		
REV	DESCRIPTION	BY	DATE	ECO NO.	FILE: U2373-44	SHEET 1 OF 1