




MALE END VIEW



FEMALE END VIEW






WIRING DIAGRAM

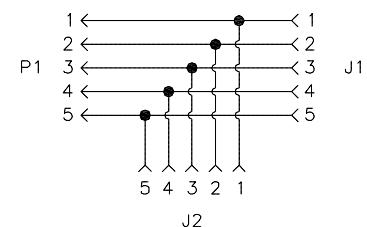

SPECIFICATIONS

CONTACT CARRIER MATERIAL	TPU
MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GREY
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	250 V
TEMPERATURE RATING	-40°C TO +80°C (-40°F TO +176°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

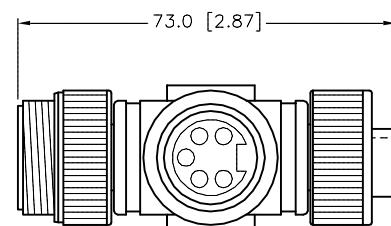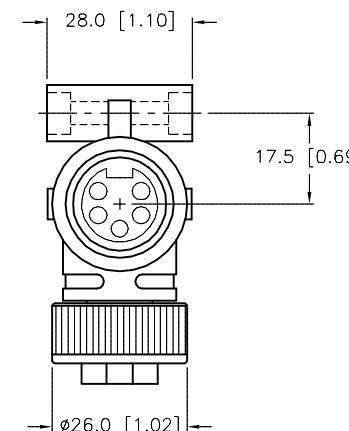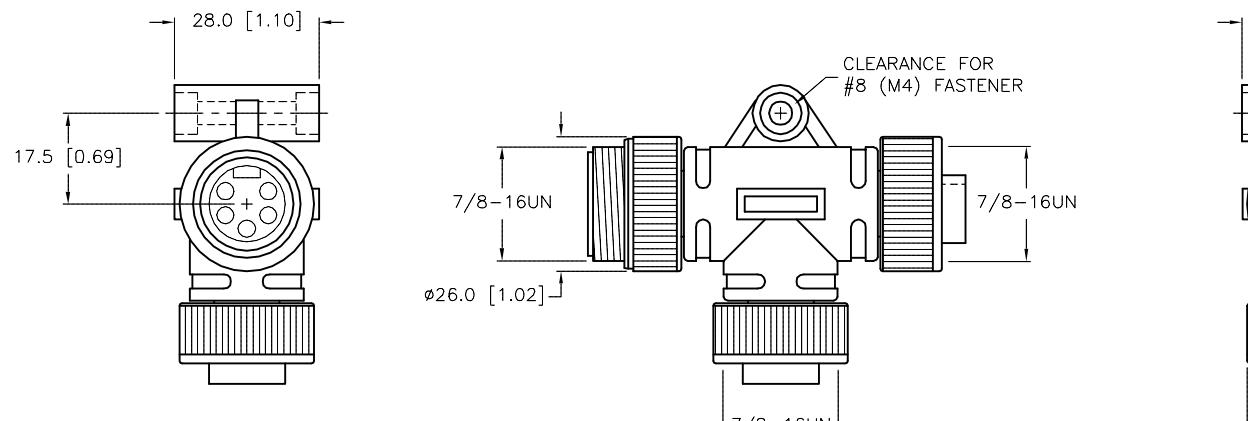

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "KF" DESIGNATES KEYWAY OF DROP CONNECTOR (J2) IS KEYED TOWARD THE FEMALE CONNECTOR END (J1).

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		DESCRIPTION	RSV-2RKV 57 KF
		DRFT	RDS		
MATERIAL	APVD	T.S.	SCALE	07/28/03	1 = 1.5
FINISH	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT	IDENTIFICATION NO.	
	CONTACT TURCK FOR MORE INFORMATION		MILLIMETER [INCH]	U2385-51	
C	UPDATED VOLTAGE	DK	11/20/08	DO NOT SCALE THIS DRAWING	REV C
REV	DESCRIPTION	BY	DATE	FILE: U2385-51	SHEET 1 OF 1