


FEMALE END VIEW


1 = BROWN
2 = WHITE
3 = BLUE
4 = BLACK



- 1 = BROWN
2 = WHITE
3 = BLUE
4 = BLACK




SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON OR TPU
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
OUTER JACKET MATERIAL/COLOR	TPU/GRAY
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	4x22 AWG
TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

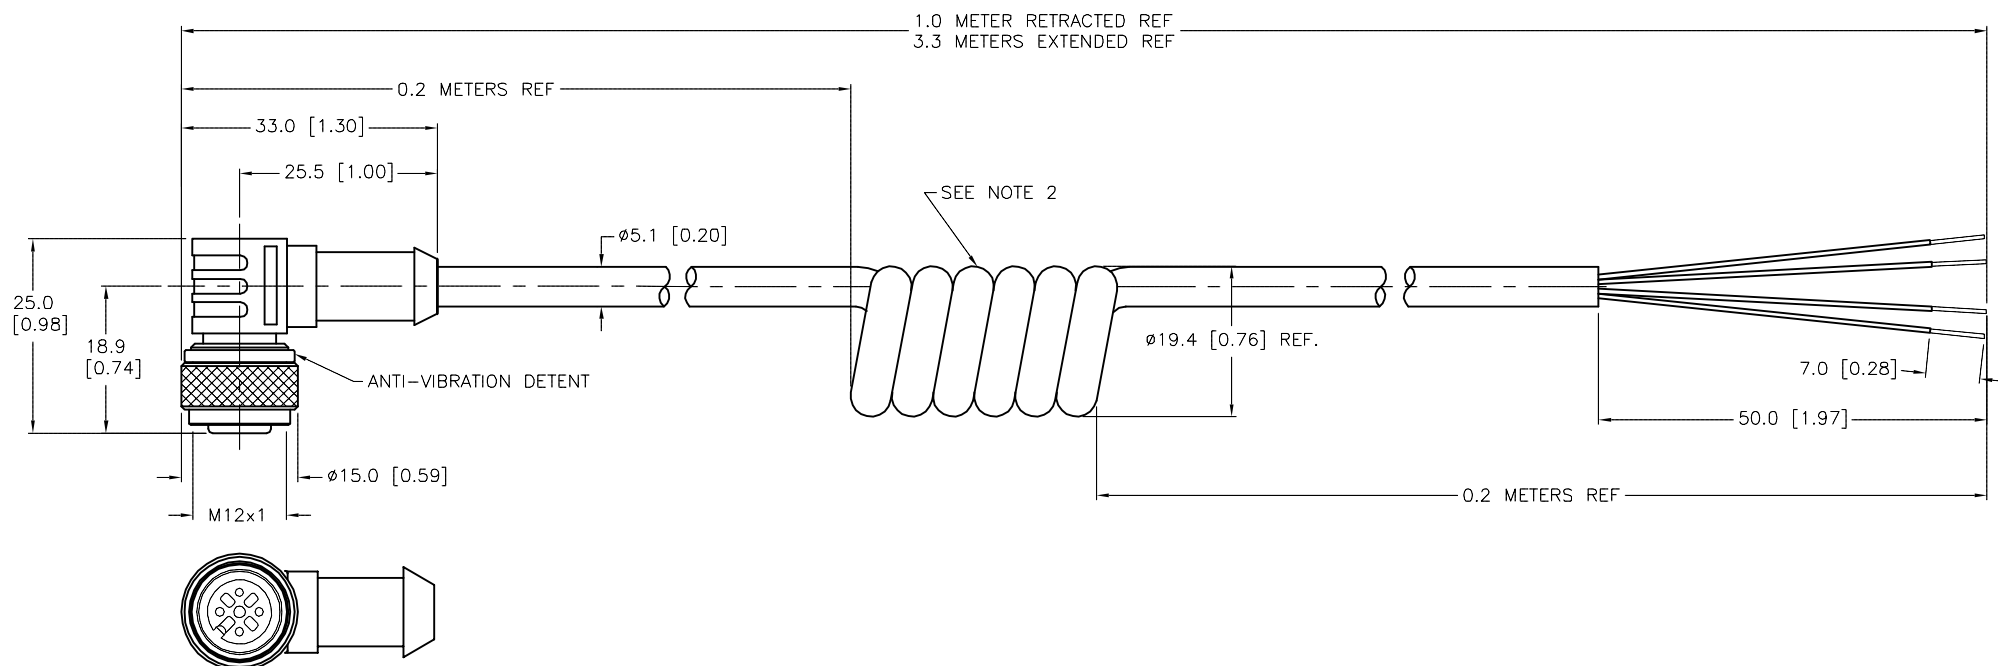

1. "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE.
2. NUMBER OF COILS IS REFERENCE ONLY.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS	3RD ANGLE PROJECTION	<div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div>		<div>TURCK</div>		<div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</div>	
	<div></div>						
1.	<div>ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</div>	DRFT	IK	DATE	04/07/99	DESCRIPTION WK 4.4T-3.3/S90-SP	
2.		APVD		SCALE	1=1.0		
3.		UNIT OF MEASUREMENT			IDENTIFICATION NO. U2424		REV
4.		MILLIMETER [INCH]					
MATERIAL	<div>CONTACT TURCK FOR MORE INFORMATION</div>	DO NOT SCALE THIS DRAWING			FILE: U2424		SHEET 1 OF 1
SEE SPECIFICATIONS							
FINISH							
SEE SPECIFICATIONS							