


FEMALE END VIEW

1 = BROWN
2 = BLUE
3 = BLACK
4 = WHITE


micro
fast.



1 = BROWN
2 = BLUE
3 = BLACK
4 = WHITE



SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
OUTER JACKET MATERIAL/COLOR	TPU/GRAY
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	4x22 AWG
TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K

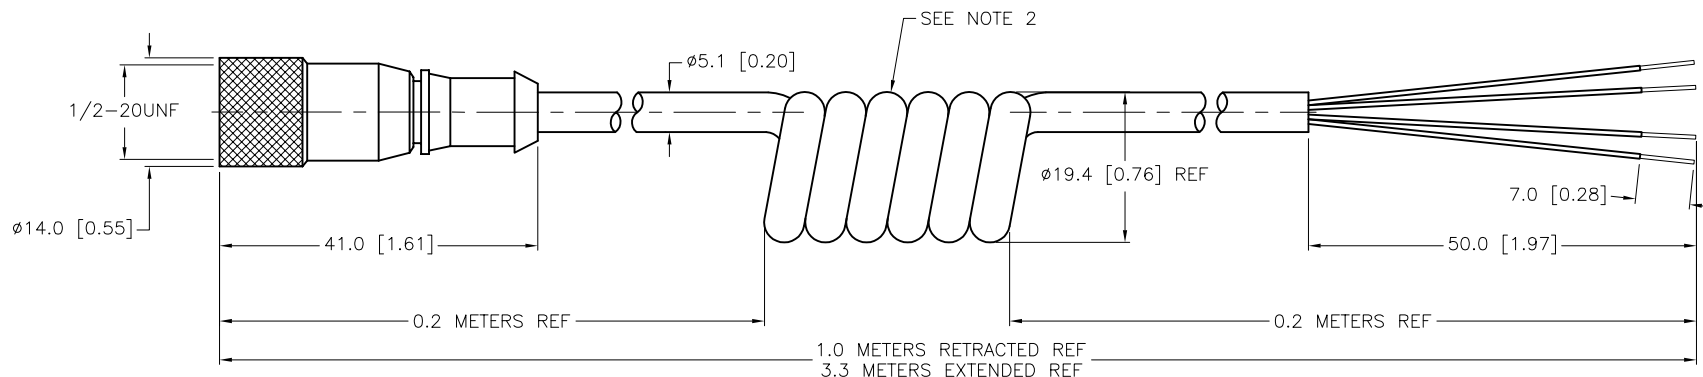

1. "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE.
2. NUMBER OF COILS IS REFERENCE ONLY.
3. "/S727" DESIGNATES SPECIAL WIRE COLORS FOR AC FLOW SENSOR.

 TURCK INC. <i>Technology Sensors and Automation Controls</i>		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
9/07	DESCRIPTION		
1.0	KB 4T-3.3/S90-SP/S727		
11	IDENTIFICATION NO.		REV
	U2473-34		F
NG	FILE: U2473-34		SHEET 1 OF 1

NOTES: 1. "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE. 2. NUMBER OF COILS IS REFERENCE ONLY. 3. "/S727" DESIGNATES SPECIAL WIRE COLORS FOR AC FLOW SENSOR.					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com TURCK INC High Technology Sensors and Automation Controls			
					1. 2. 3. 4.						DESCRIPTION KB 4T-3.3/S90-SP/S727			
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RWC				DATE 02/19/07	
					SEE SPECIFICATIONS				APVD				SCALE 1=1.0	
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.		REV						
SEE SPECIFICATIONS						U2473-34		F						
FILE: U2473-34						SHEET 1 OF 1								

F	UPDATE COIL DIAMETER	KMY	07/23/12	38999
REV	DESCRIPTION	BY	DATE	ECO NO.