





FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
 1 = BROWN 2 = BLUE 3 = BLACK 4 = WHITE	 1 = BROWN 2 = BLUE 3 = BLACK 4 = WHITE	CONTACT CARRIER MATERIAL	NYLON OR TPU
		MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	250 V
		OUTER JACKET MATERIAL/COLOR	TPU/GRAY
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	4x22 AWG
		TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)
		PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP68, IP69K

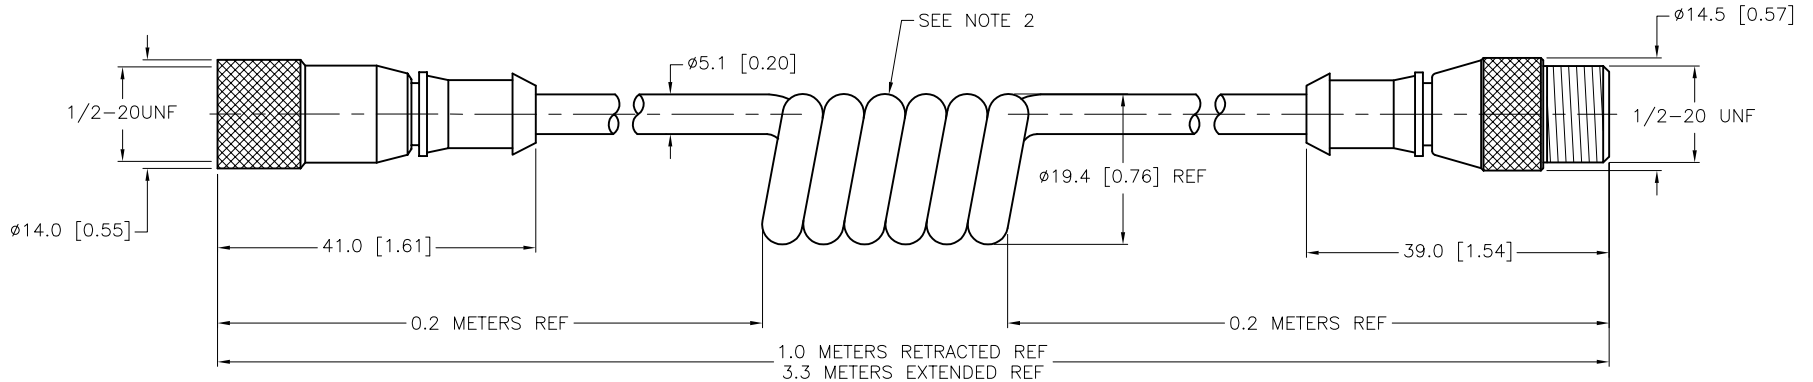

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE.
2. NUMBER OF COILS IS REFERENCE ONLY.
3. "/S727" DESIGNATES SPECIAL WIRE COLORS FOR AC FLOW SENSOR.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK INC <i>High Technology Sensors and Automation Controls</i> 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com							
1.											
2.		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION		DRFT		RWC		DATE 02/19/07		DESCRIPTION KB 4T-3.3-SB 4T/S90-SP/S727	
3.				APVD				SCALE 1=1.0			
4.		UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING				IDENTIFICATION NO. U2473-35				REV G	
SEE SPECIFICATIONS											
FINISH											
SEE SPECIFICATIONS						FILE: U2473-35				SHEET 1 OF 1	

G	UPDATE COIL DIAMETER	KMY	07/23/12	38999
REV	DESCRIPTION	BY	DATE	ECO NO.