


MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS			
	_		CONTACT CARRIER MATERIAL	TPU		
3	3	1	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW		
4 2	2 4	3 J1	CONTACT MATERIAL/PLATING	BRASS/GOLD		
1 (%°°)	1 5	4 5	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL		
			RATED CURRENT [A]	9.0 A		
5 1			RATED VOLTAGE [V]	250 V		
		$\downarrow\downarrow\downarrow\downarrow\downarrow$	TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)		
mini iast,	mnimi iasi,	1 2 3 4 5	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67		
raist.		P1		·		

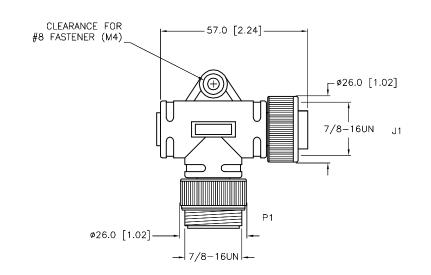





SOURCE DRAWING - FOR REFERENCE ONLY

					RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE		3000 CAMPUS DRIVE MINNEAPOLIS. MN 55441			
					2. 3. 4.	⊕ ←	WRITTEN PERMISSION IS PROHIBITED.			1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
					MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR	DRFT RDS	DATE 01/20/09 SCALE 1=1.5	DESCRIPTION WSM RKM 50			
					FINISH	REFERENCE ONLY		EASUREMENT	IDENTIFICATION NO.		REV	
				CONTACT TURCK FOR MORE	MILLIMETER [INCH]		U2717-04					
D	DRAWING PROCESSED AS PART OF ECO 33971	СВМ	04/07/11	33971		INFORMATION						
REV	DESCRIPTION	BY	DATE	ECO NO.			DO NOT SCAL	E THIS DRAWING	FILE: U2717-04		SHEET 1 OF 1	