


J1, J2 CONNECTORS		TERMINAL BLOCK PLUGS	SPECIFICATIONS	
			HOUSING MATERIAL/COLOR	NYLON 66 - 33% GLASS FILLED/BLACK
		1 = V- 2 = CAN_L 3 = DRAIN 4 = CAN_H 5 = V+	RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
			CONTACT CARRIERS/COLOR	PA 12/BLUE-GREY
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			OPERATING VOLTAGE	40 V
			OPERATING CURRENT	4 A
			OPTIONAL TERMINATOR RESISTOR	1 OF 2 SWITCHES IN "ON" POSITION
			PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
			OPERATING TEMPERATURE	-30°C to +80°C (-22°F to +176°F)

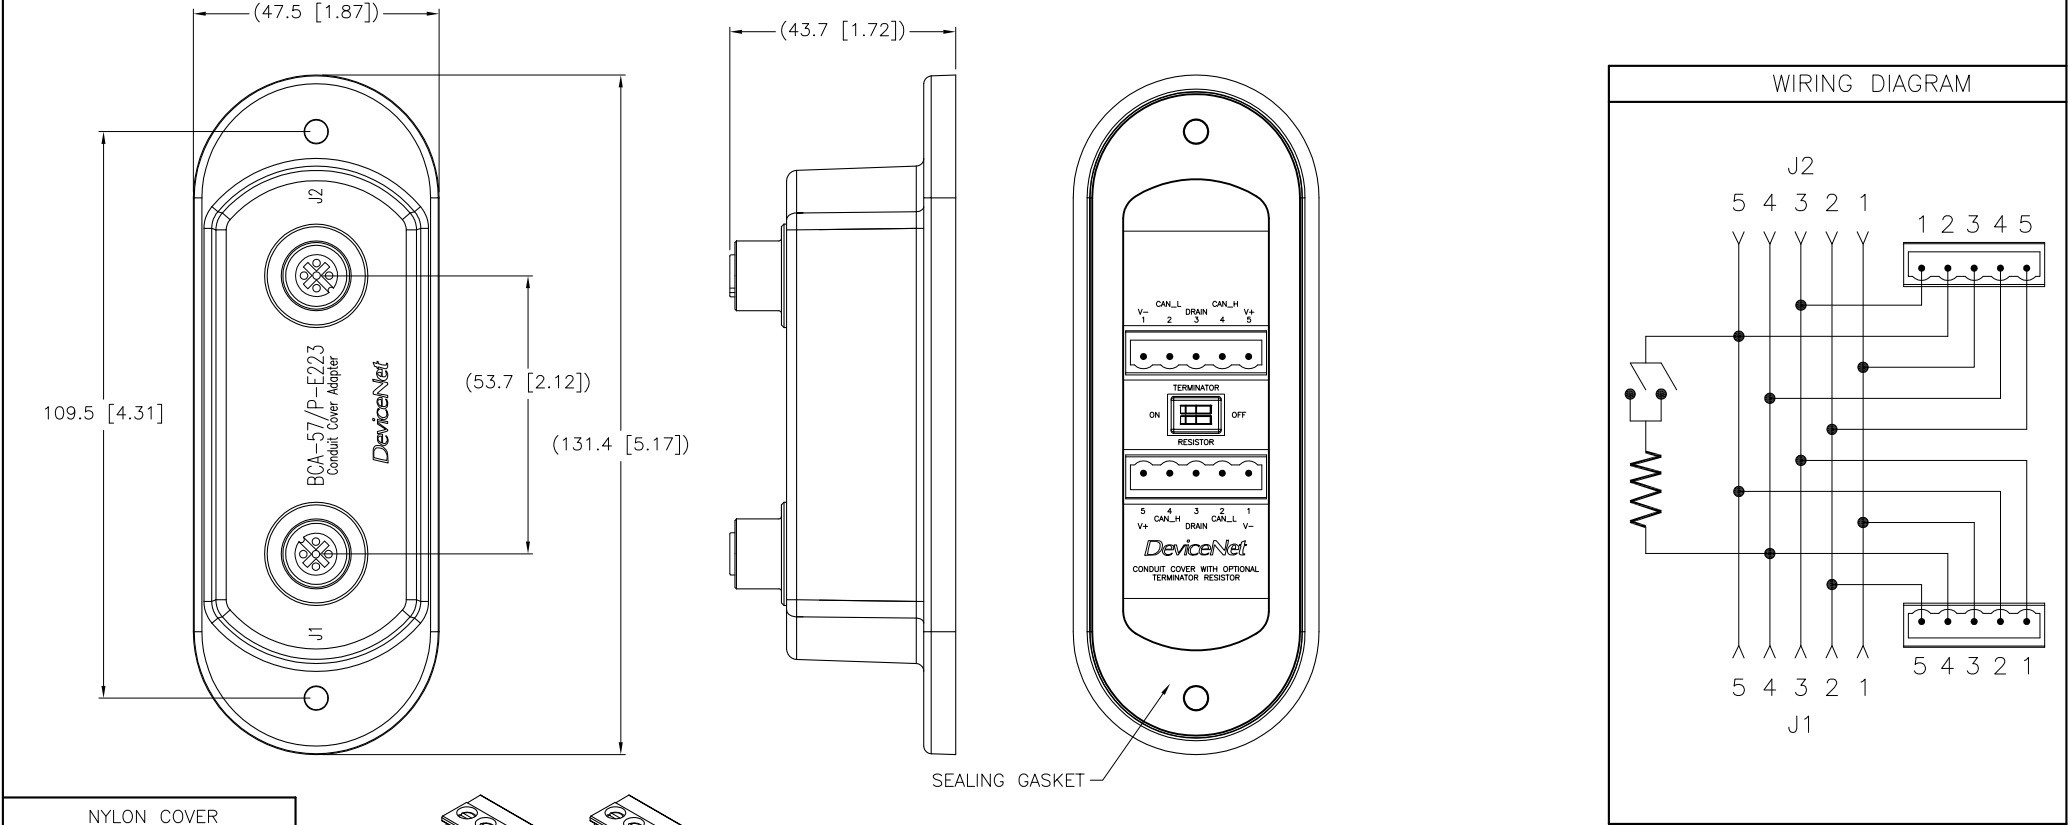

NYLON COVER SCREWS INCLUDED

FORM 8 CONDUIT BODIES:
10-24 SCREWS

MARK 9 CONDUIT BODIES:
8-32 SCREWS

TERMINAL PLUGS INCLUDED

NOTES:

1. "/P" INDICATES SPECIAL GASKET FOR PVC COATED CONDUIT BODIES. AND NYLON COVER SCREWS.

B	UPDATE MOUNTING HOLE DIMENSION	CK	04/28/11	34946
REV	DESCRIPTION	BY	DATE	ECO NO.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com
	MATERIAL FINISH	DRFT RDS DSGN	DATE 05/06/05 SCALE 1=1.5
UNIT OF MEASUREMENT MILLIMETER [INCH]	IDENTIFICATION NO. U3-00423	REV B	
CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING	FILE: U3-00423	SHEET 1 OF 1