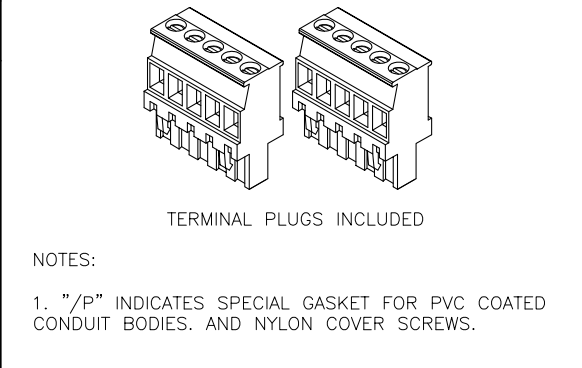
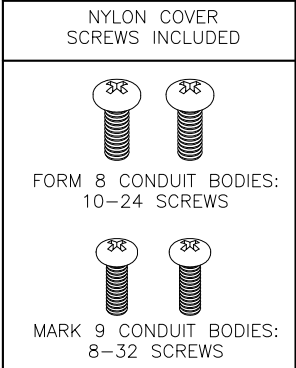
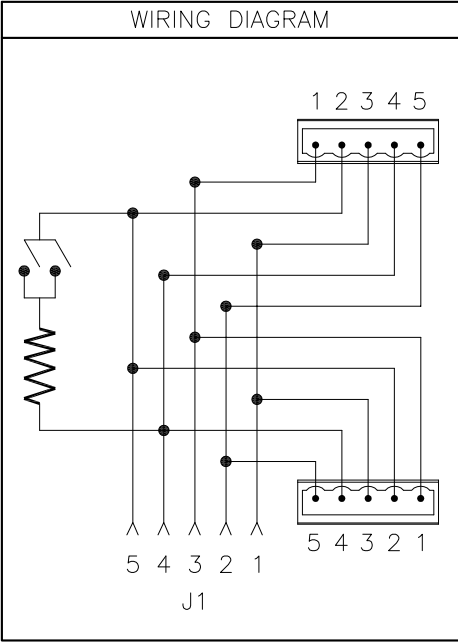
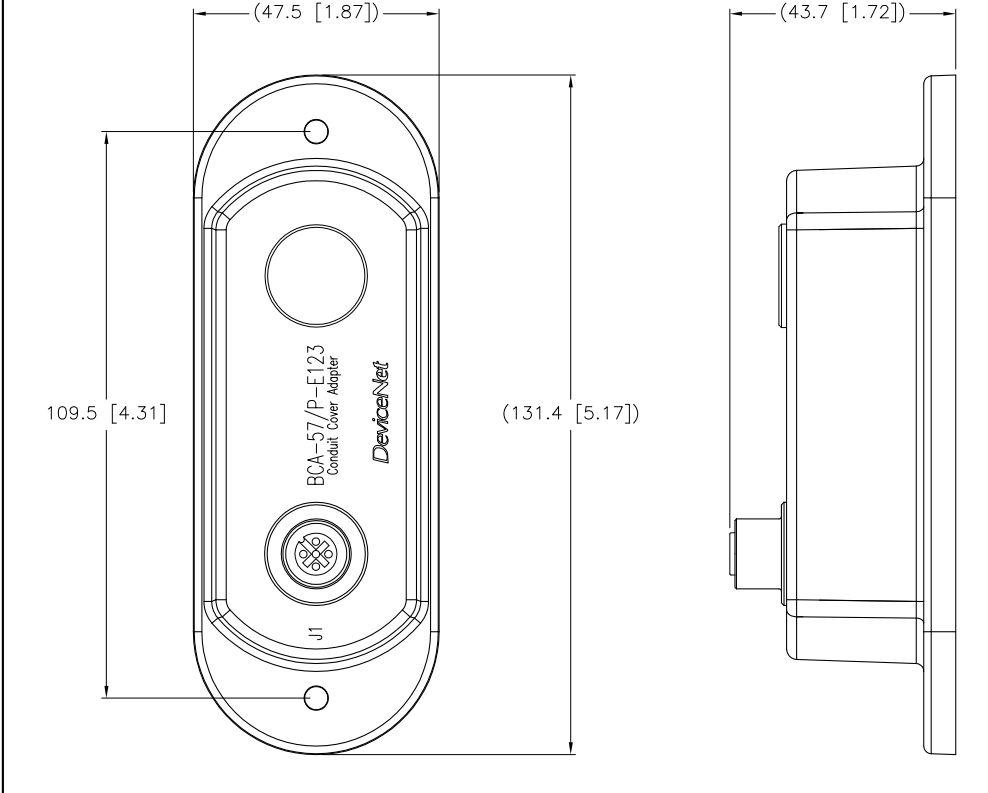






| SPECIFICATIONS | |
|------------------------------------|-----------------------------------------------------------------------|
| HOUSING MATERIAL/COLOR | NYLON 66 - 33% GLASS FILLED/BLACK |
| RECEPTACLE HOUSING MATERIAL/FINISH | STAINLESS STEEL/PASSIVATED |
| CONTACT CARRIER/COLOR | PA 12/BUE-GREY |
| CONTACT MATERIAL/PLATING | BRASS/GOLD |
| OPERATING VOLTAGE | 40 V |
| OPERATING CURRENT | 4 A |
| OPTIONAL TERMINATOR RESISTOR | 1 OF 2 SWITCHES IN "ON" POSITION |
| PROTECTION CLASS to DIN 40050 | IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED |
| OPERATING TEMPERATURE | -30°C to +80°C (-22°F to +176°F) |



SOURCE DRAWING - FOR REFERENCE ONLY

| | | | | | | | | | | | | | | | |
|-------------------------------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------------------------------------------------|--|---------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------|--|--------------|--|
|  FORM 8 CONDUIT BODIES: 10-24 SCREWS | |  TERMINAL PLUGS INCLUDED | | <p>RELATED DOCUMENTS</p> <p>1. 2. 3. 4.</p> | | <p>3RD ANGLE PROJECTION</p>  | | <p>THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</p> | | <p>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</p> <p>TURCK INC <i>High Technology Sensors and Automation Controls</i></p> | | | | | |
|  MARK 9 CONDUIT BODIES: 8-32 SCREWS | | NOTES: 1. "/P" INDICATES SPECIAL GASKET FOR PVC COATED CONDUIT BODIES. AND NYLON COVER SCREWS. | | MATERIAL | | ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY | | DRFT RDS DSGN | | DATE 05/06/05 SCALE 1 = 1.5 | | DESCRIPTION BCA-57/P-E123 | | | |
| | | | | FINISH | | CONTACT TURCK FOR MORE INFORMATION | | UNIT OF MEASUREMENT MILLIMETER [INCH] | | DO NOT SCALE THIS DRAWING | | IDENTIFICATION NO. U3-00424 | | REV B | |
| B UPDATE MOUNTING HOLE DIMENSION | | CK 04/28/11 34946 | | | | | | | | | | FILE: U3-00424 | | SHEET 1 OF 1 | |
| REV DESCRIPTION | | BY DATE ECO NO. | | | | | | | | | | | | | |