



FEMALE END VIEW


1 = WHITE/BLUE
 2 = WHITE/BROWN
 3 = BROWN
 4 = ORANGE (-TX)
 5 = WHITE/GREEN (+RX)
 6 = WHITE/ORANGE (+TX)
 7 = BLUE
 8 = GREEN (-RX)

 **Euro fast.** *Ethernet*

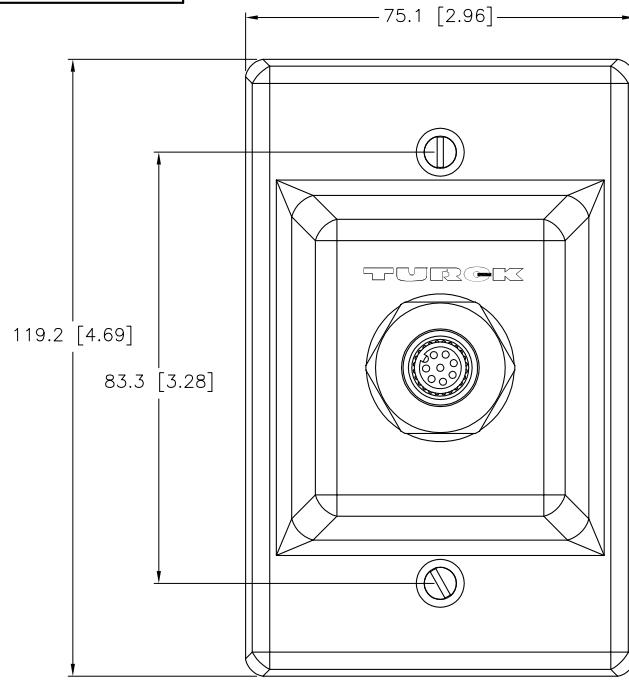

15°

NOTES:

1) GASKET NOT SHOWN FOR CLARITY.


 = 90° CORDSET CABLE DIRECTION

B DRAWING PROCESSED AS PART OF ECO 33971 CBM 04/07/11 33971

REV DESCRIPTION BY DATE ECO NO.

SPECIFICATIONS

WALL PLATE MATERIAL	16 GA. 316 STAINLESS STEEL
RECEPTACLE HOUSING MATERIAL	STAINLESS STEEL, PASSIVATED
SEALING GASKET MATERIAL	CLOSED CELL POLYETHYLENE FOAM
MOUNTING HARDWARE (SUPPLIED)	6-32 SCREWS, STAINLESS STEEL
CONTACT CARRIERS/COLOR	TPU/BLACK
CONTACTS	GOLD-PLATED BRASS
CABLE TERMINATION	110 PUNCH-DOWN BLOCKS
OPERATING VOLTAGE	30 VAC/36 VDC
OPERATING CURRENT	1.5 A
PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to +70°C (-40°F to +158°F)

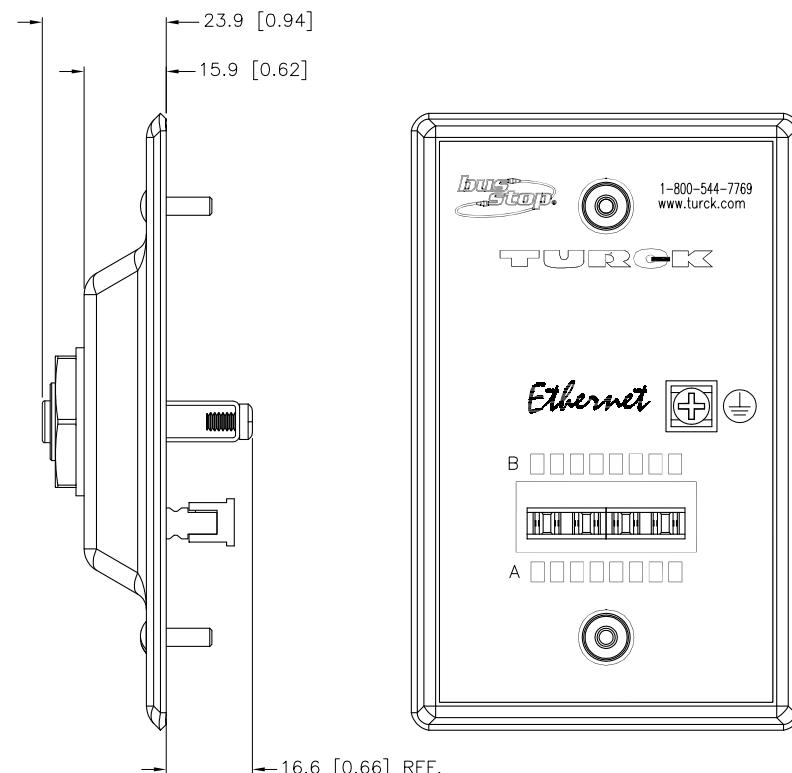

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com					
1.	2.		DRFT	DF	DATE	08/24/05	DESCRIPTION	BPA-84-E113				
3.	4.		DSGN		SCALE	1=1.5						
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT		IDENTIFICATION NO.						
FINISH		CONTACT TURCK FOR MORE INFORMATION		MILLIMETER [INCH]		REV B						
DO NOT SCALE THIS DRAWING						FILE: U3-00654						
						SHEET 1 OF 1						