



FEMALE END VIEW






BOARD LAYOUT

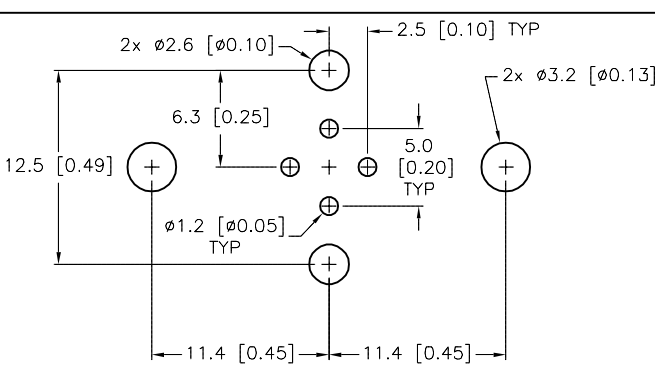


SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PA 12 NYLON/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING/LOCKNUT MATERIAL	BRASS/NICKEL
WASHER MATERIAL	NYLON
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
NUMBER OF CONDUCTORS [AWG]	PRINTED CIRCUIT PINS
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
MAX BOARD THICKNESS	2mm

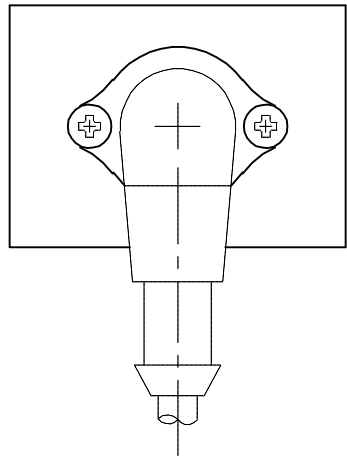

RIGHT ANGLE
CONNECTOR ORIENTATION

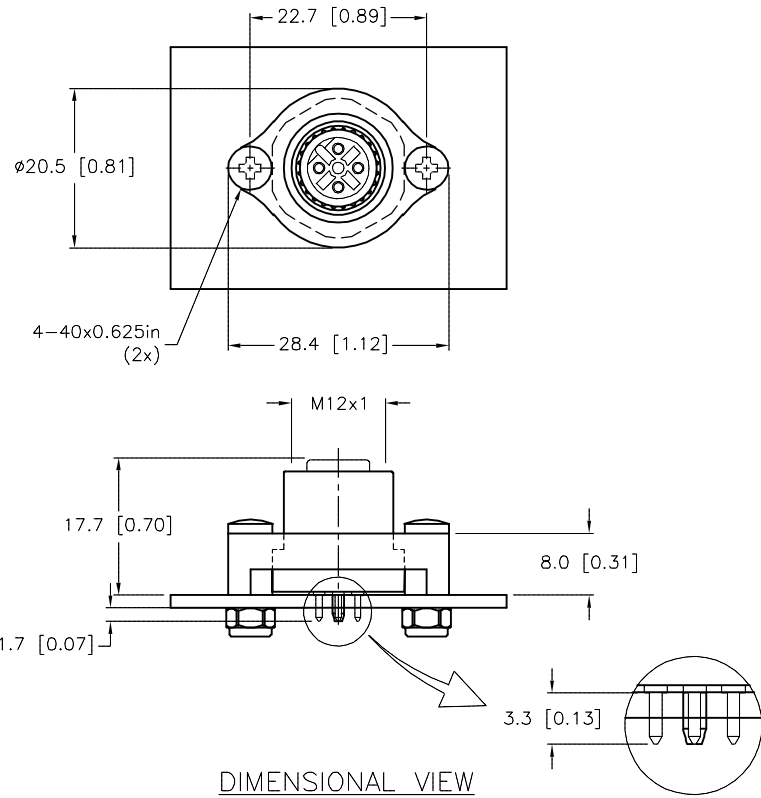

DIMENSIONAL VIEW

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:


1. FOR OTHER RIGHT ANGLE CONNECTOR ORIENTATIONS, ROTATE BOARD LAYOUT TO DESIRED ORIENTATION OR ROTATE 4-HOLE PINOUT IN INCREMENTS OF 60°.

B	ADD SPECS & UPDATE SCREW LENGTH	NF	08/01/19	500000000281
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS

1.
2.
3.
4.

3RD ANGLE PROJECTION



THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT RWC

DATE 03/17/06

APVD

SCALE 1= .5

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us



DESCRIPTION

FKDD 44-PCB KIT

IDENTIFICATION NO.

U3-00780

REV

B

FILE: U3-00780

SHEET 1 OF 1