


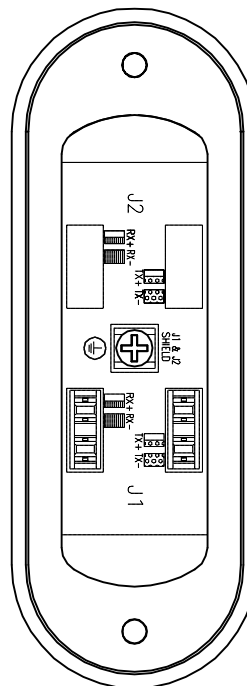
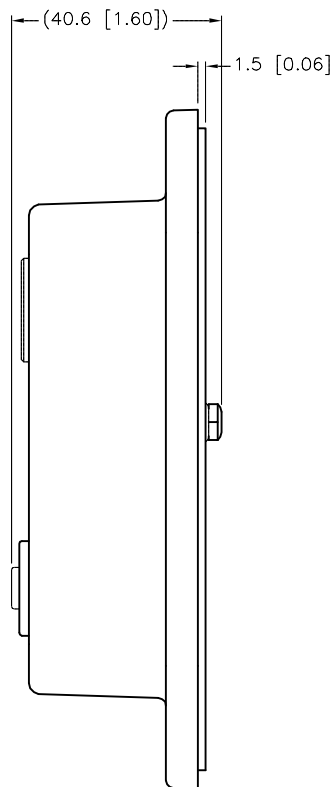


# FEMALE END VIEW

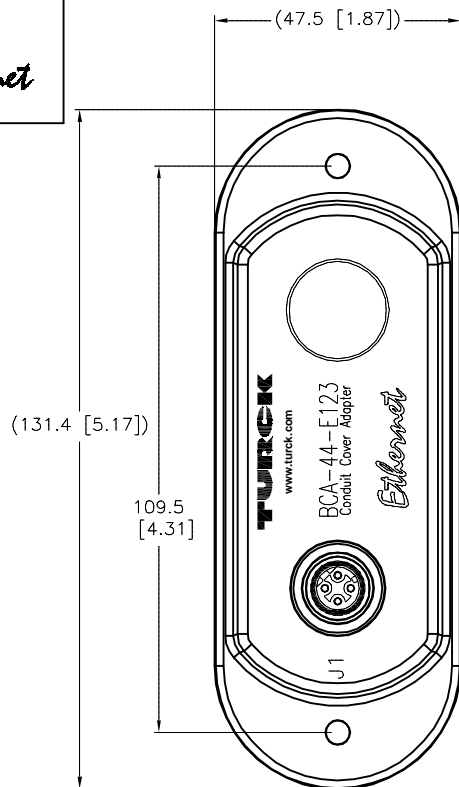


- 1 = WHITE/ORANGE (+TX)
- 2 = WHITE/GREEN (+RX)
- 3 = ORANGE (-TX)
- 4 = GREEN (-RX)




# SPECIFICATIONS

HOUSING MATERIAL/COLOR	NYLON 66 - 33% GLASS FILLED/BLACK
RECEPTACLE HOUSING MAT'L/FINISH	STAINLESS STEEL/PASSIVATED
CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	40 V
OPERATING CURRENT	4 A
WIRE TERMINATION METHOD	110 PUNCH DOWN BLOCKS (IDC)
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-30°C to +80°C (-22°F to +176°F)

## COVER SCREWS INCLUDED




FORM 8 CONDUIT BODIES:  
10-24 SCREWS



MARK 9 CONDUIT BODIES:  
8-32 SCREWS

↑ = 90° CORDSET CABLE DIRECTION

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS  1.  2.  3.  4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	<div><b>TURCK INC</b></div> <div>High Technology Sensors and Automation Controls</div> <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</div>					
	MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT				RDS	DATE	11/10/11	DESCRIPTION  BCA-44-E123
			APVD				D.E.	SCALE	1=1.5	
FINISH	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT  <b>MILLIMETER [ INCH ]</b>				IDENTIFICATION NO.  U3-00833	REV  B			
		DO NOT SCALE THIS DRAWING						FILE: U3-00833	SHEET 1 OF	