




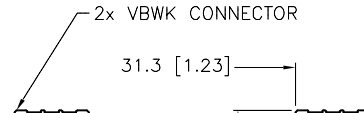


MALE END VIEW		FEMALE END VIEW		SPECIFICATIONS																									
				<table><tr><td>CONTACT CARRIER MATERIAL/COLOR</td><td>TPU/BLUE-GRAY</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/BLUE-GRAY</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED VOLTAGE [V]</td><td>250 V</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>PVC/GRAY</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>HDPE (DATA), PVC (POWER)</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>4x24 AWG, 24 AWG DRAIN</td></tr><tr><td>SHIELDING</td><td>FOIL (PAIRS), FOIL (OVERALL)</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C to +80°C (-40°F to +176°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP68</td></tr></table>		CONTACT CARRIER MATERIAL/COLOR	TPU/BLUE-GRAY	MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED VOLTAGE [V]	250 V	RATED CURRENT [A]	4.0 A	OUTER JACKET MATERIAL/COLOR	PVC/GRAY	CONDUCTOR INSULATION MATERIAL	HDPE (DATA), PVC (POWER)	NUMBER OF CONDUCTORS [AWG]	4x24 AWG, 24 AWG DRAIN	SHIELDING	FOIL (PAIRS), FOIL (OVERALL)	TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
CONTACT CARRIER MATERIAL/COLOR	TPU/BLUE-GRAY																												
MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY																												
CONTACT MATERIAL/PLATING	BRASS/GOLD																												
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																												
RATED VOLTAGE [V]	250 V																												
RATED CURRENT [A]	4.0 A																												
OUTER JACKET MATERIAL/COLOR	PVC/GRAY																												
CONDUCTOR INSULATION MATERIAL	HDPE (DATA), PVC (POWER)																												
NUMBER OF CONDUCTORS [AWG]	4x24 AWG, 24 AWG DRAIN																												
SHIELDING	FOIL (PAIRS), FOIL (OVERALL)																												
TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)																												
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68																												
<p>1 = BARE (SHIELD) 2 = RED (+ VOLTAGE) 3 = BLACK (- VOLTAGE) 4 = WHITE (CAN_H) 5 = BLUE (CAN_L)</p>		<p>1 = BARE (SHIELD) 2 = RED (+ VOLTAGE) 3 = BLACK (- VOLTAGE) 4 = WHITE (CAN_H) 5 = BLUE (CAN_L)</p>																											
																													

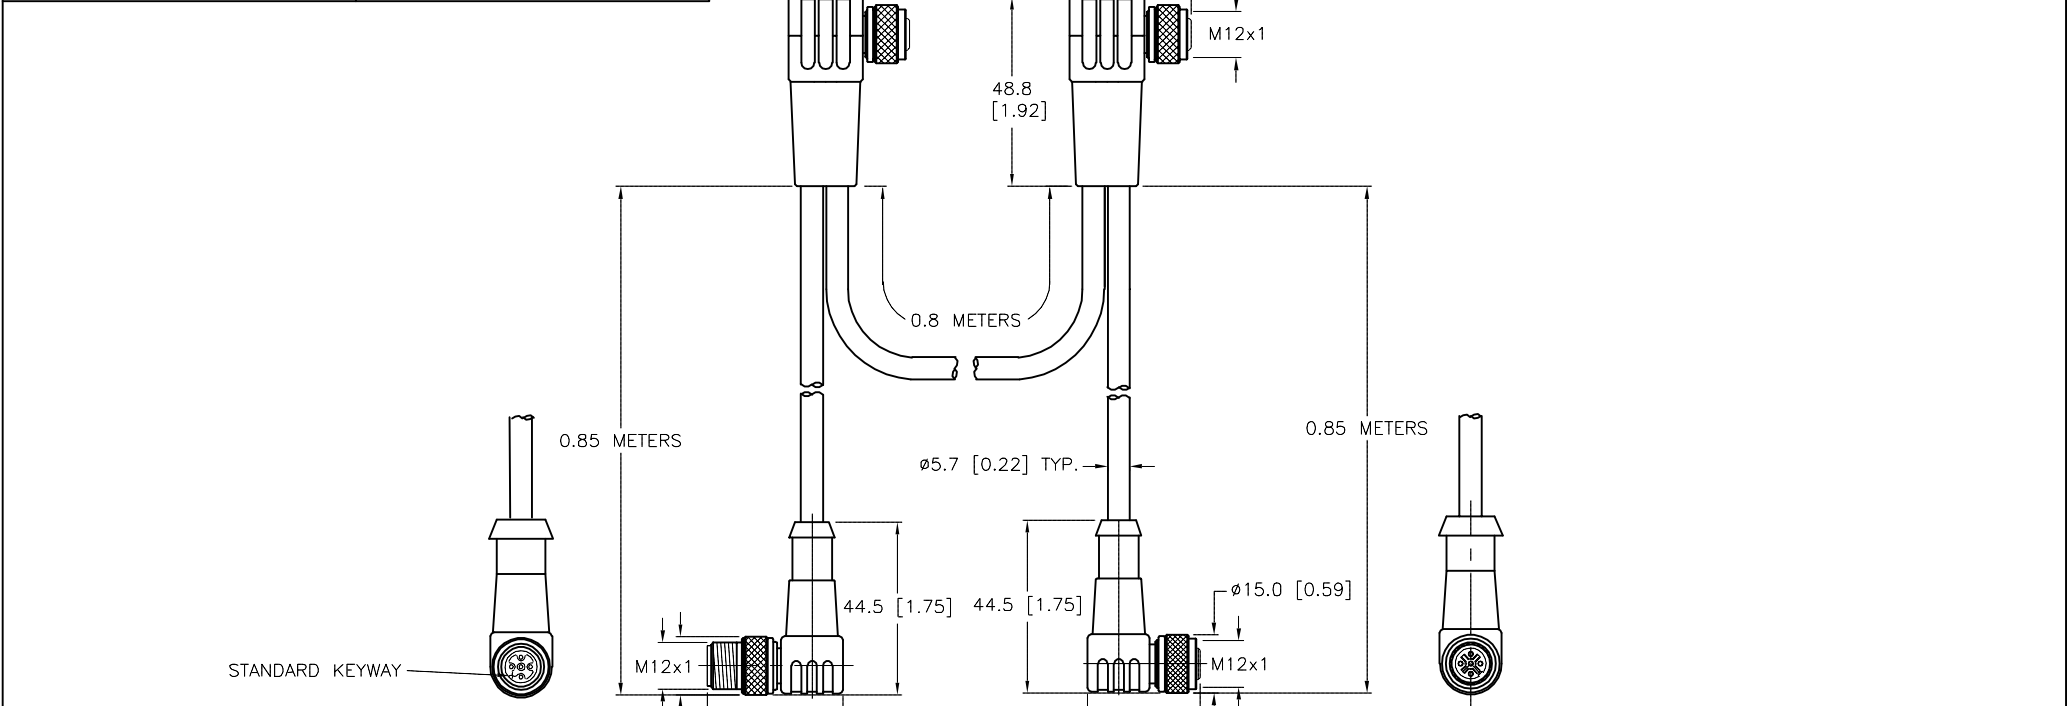


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

NOTES:

1) "DCL" = DESIGNATES CUSTOM LENGTHS AS NOTED ON DRAWING.

D	DRAWING PROCESSED AS PART OF ECO 33971	CBM	04/07/11	33971
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
		DRFT	RDS	DATE	03/06/07
MATERIAL   FINISH	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY  CONTACT TURCK FOR MORE INFORMATION	DSGN		SCALE	1=2.0
		UNIT OF MEASUREMENT		IDENTIFICATION NO.	
		MILLIMETER [ INCH ]		U3-10463	
		DO NOT SCALE THIS DRAWING		FILE: U3-10463	SHEET 1 OF 1

SOURCE DRAWING - FOR REFERENCE ONLY

**TURCK**

DESCRIPTION  
WSC 2VBWK WKC 5724-DCL1

REV  
D