


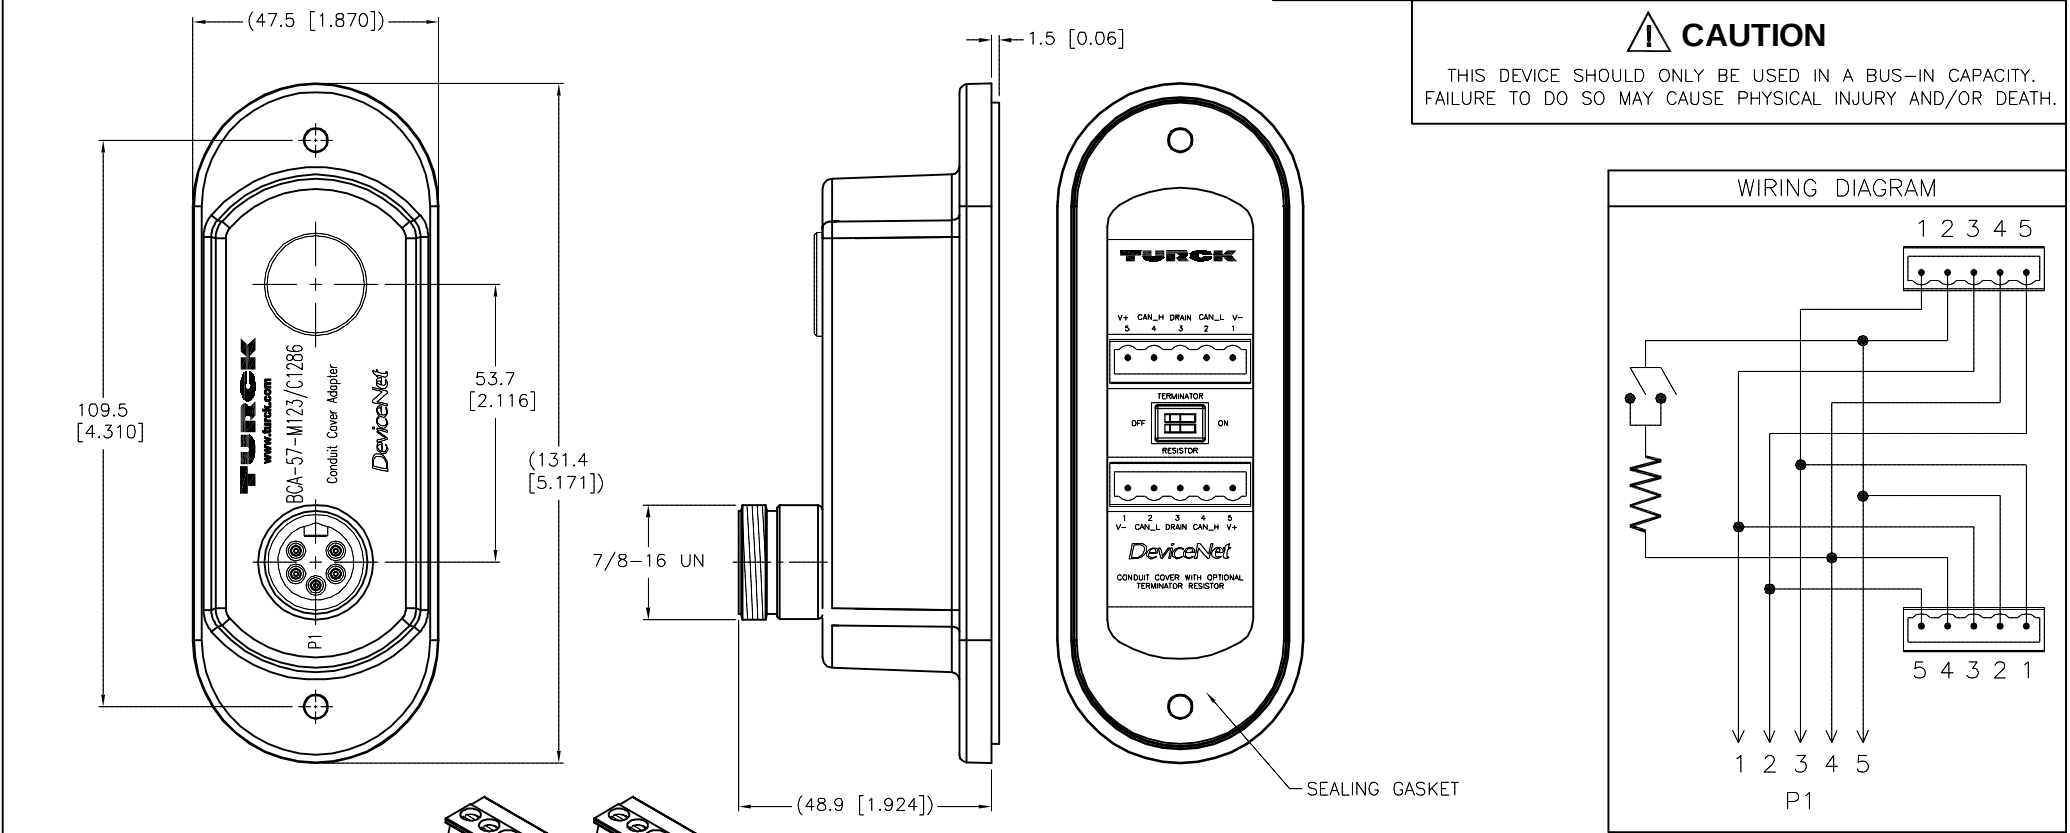





P1 CONNECTOR		TERMINAL BLOCK PLUGS		SPECIFICATIONS																			
 1 = DRAIN 2 = + VOLTAGE 3 = - VOLTAGE 4 = CAN_H 5 = CAN_L  DeviceNetTM		 1 = - VOLTAGE 2 = CAN_L 3 = DRAIN 4 = CAN_H 5 = + VOLTAGE  DeviceNetTM		<table><tr><td>HOUSING MATERIAL/COLOR</td><td>NYLON 66 – 33% GLASS FILLED/BLACK</td></tr><tr><td>RECEPTACLE HOUSING MATERIAL/FINISH</td><td>STAINLESS STEEL/PASSIVATED</td></tr><tr><td>CONTACT CARRIERS/COLOR</td><td>TPU/BLUE</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>OPERATING VOLTAGE</td><td>40 V</td></tr><tr><td>OPERATING CURRENT</td><td>8 A</td></tr><tr><td>OPTIONAL TERMINATOR RESISTOR</td><td>1 OF 2 SWITCHES IN "ON" POSITION</td></tr><tr><td>PROTECTION CLASS to DIN 40050</td><td>IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED</td></tr><tr><td>OPERATING TEMPERATURE</td><td>–40°C to +70°C (–40°F to +158°F)</td></tr></table>		HOUSING MATERIAL/COLOR	NYLON 66 – 33% GLASS FILLED/BLACK	RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED	CONTACT CARRIERS/COLOR	TPU/BLUE	CONTACT MATERIAL/PLATING	BRASS/GOLD	OPERATING VOLTAGE	40 V	OPERATING CURRENT	8 A	OPTIONAL TERMINATOR RESISTOR	1 OF 2 SWITCHES IN "ON" POSITION	PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED	OPERATING TEMPERATURE	–40°C to +70°C (–40°F to +158°F)
HOUSING MATERIAL/COLOR	NYLON 66 – 33% GLASS FILLED/BLACK																						
RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED																						
CONTACT CARRIERS/COLOR	TPU/BLUE																						
CONTACT MATERIAL/PLATING	BRASS/GOLD																						
OPERATING VOLTAGE	40 V																						
OPERATING CURRENT	8 A																						
OPTIONAL TERMINATOR RESISTOR	1 OF 2 SWITCHES IN "ON" POSITION																						
PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED																						
OPERATING TEMPERATURE	–40°C to +70°C (–40°F to +158°F)																						



COVER SCREWS INCLUDED  FORM 8 CONDUIT BODIES: 10-24 SCREWS  MARK 9 CONDUIT BODIES: 8-32 SCREWS  TERMINAL PLUGS INCLUDED NOTES: 1. ONE OF THE CONNECTORS (J2) CHANGED TO A MALE MINIFAST CONNECTOR (P1).					SOURCE DRAWING - FOR REFERENCE ONLY RELATED DOCUMENTS 1. 2. 3. 4. 3RD ANGLE PROJECTION  MATERIAL FINISH THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. DRFT RDS APVD UNIT OF MEASUREMENT MILLIMETER [INCH] CONTACT TURCK FOR MORE INFORMATION 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com TURCK INC High Technology Sensors and Automation Controls DESCRIPTION BCA-57-M123/C1286 IDENTIFICATION NO. U3-10656 REV D DO NOT SCALE THIS DRAWING FILE: U3-10656 SHEET 1 OF 1					
D	ADD THICKER GASKET		RDS	09/12/13	42993					
REV	DESCRIPTION		BY	DATE	ECO NO.					