

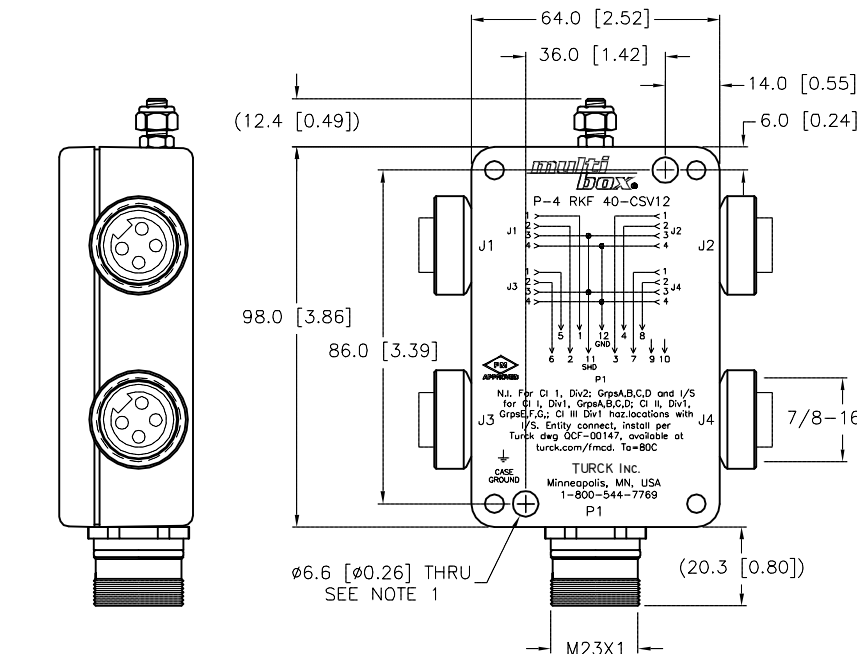
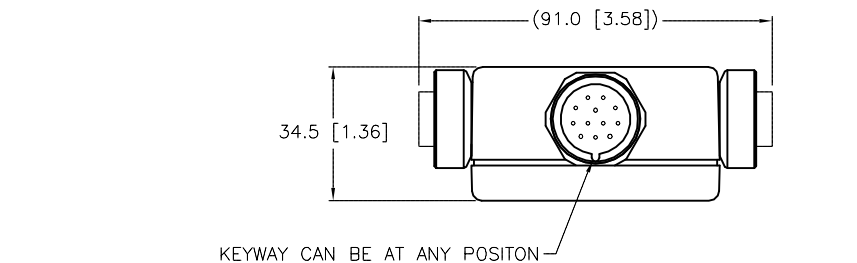
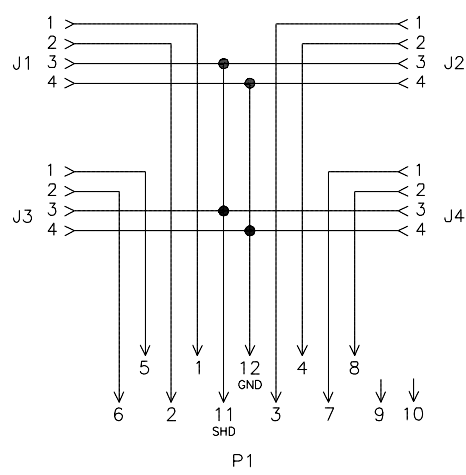



MALE END VIEW (P1)		FEMALE END VIEW (J1-J4)		SPECIFICATIONS																							
  M23 connector		 		<table><tr><td>HOUSING MATERIAL</td><td>DIE-CAST ALUMINUM ALLOY</td></tr><tr><td>HOUSING FINISH/COLOR</td><td>POWDER COAT/BLACK</td></tr><tr><td>RECEPTACLE HOUSINGS (J1-J4)</td><td>BRASS/NICKEL-PLATED</td></tr><tr><td>RECEPTACLE HOUSING (P1)</td><td>STAINLESS STEEL</td></tr><tr><td>CONTACT CARRIERS/COLOR (J1-J4)</td><td>TPU/BLACK</td></tr><tr><td>CONTACT CARRIER/COLOR (P1)</td><td>NYLON or PBT/WHITE</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>OPERATING VOLTAGE</td><td>250 VAC/300 VDC</td></tr><tr><td>OPERATING CURRENT</td><td>4.0 AMPS PER PORT, 8.0 AMPS TOTAL</td></tr><tr><td>PROTECTION CLASS to DIN 40050</td><td>IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED</td></tr><tr><td>OPERATING TEMPERATURE</td><td>-40°C TO +80°C (-40°F TO +176°F)</td></tr></table>		HOUSING MATERIAL	DIE-CAST ALUMINUM ALLOY	HOUSING FINISH/COLOR	POWDER COAT/BLACK	RECEPTACLE HOUSINGS (J1-J4)	BRASS/NICKEL-PLATED	RECEPTACLE HOUSING (P1)	STAINLESS STEEL	CONTACT CARRIERS/COLOR (J1-J4)	TPU/BLACK	CONTACT CARRIER/COLOR (P1)	NYLON or PBT/WHITE	CONTACT MATERIAL/PLATING	BRASS/GOLD	OPERATING VOLTAGE	250 VAC/300 VDC	OPERATING CURRENT	4.0 AMPS PER PORT, 8.0 AMPS TOTAL	PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED	OPERATING TEMPERATURE	-40°C TO +80°C (-40°F TO +176°F)
HOUSING MATERIAL	DIE-CAST ALUMINUM ALLOY																										
HOUSING FINISH/COLOR	POWDER COAT/BLACK																										
RECEPTACLE HOUSINGS (J1-J4)	BRASS/NICKEL-PLATED																										
RECEPTACLE HOUSING (P1)	STAINLESS STEEL																										
CONTACT CARRIERS/COLOR (J1-J4)	TPU/BLACK																										
CONTACT CARRIER/COLOR (P1)	NYLON or PBT/WHITE																										
CONTACT MATERIAL/PLATING	BRASS/GOLD																										
OPERATING VOLTAGE	250 VAC/300 VDC																										
OPERATING CURRENT	4.0 AMPS PER PORT, 8.0 AMPS TOTAL																										
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED																										
OPERATING TEMPERATURE	-40°C TO +80°C (-40°F TO +176°F)																										

					
NOTES: 1. CLEARANCE HOLE FOR 1/4-20 MOUNTING SCREWS (2 NOT INCLUDED).		WIRING DIAGRAM		SOURCE DRAWING - FOR REFERENCE ONLY	
RELATED DOCUMENTS 1. SEE SPECIFICATIONS 2. SEE SPECIFICATIONS 3. SEE SPECIFICATIONS 4. SEE SPECIFICATIONS		3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. DRFT RDS DATE 01/09/08 APVD SCALE 1=2.0 UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING	
3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		TURCK		P-4 RKF 40-CSV12	
IDENTIFICATION NO. U3-10675		REV D		FILE: U3-10675	
SHEET 1 OF 1					