




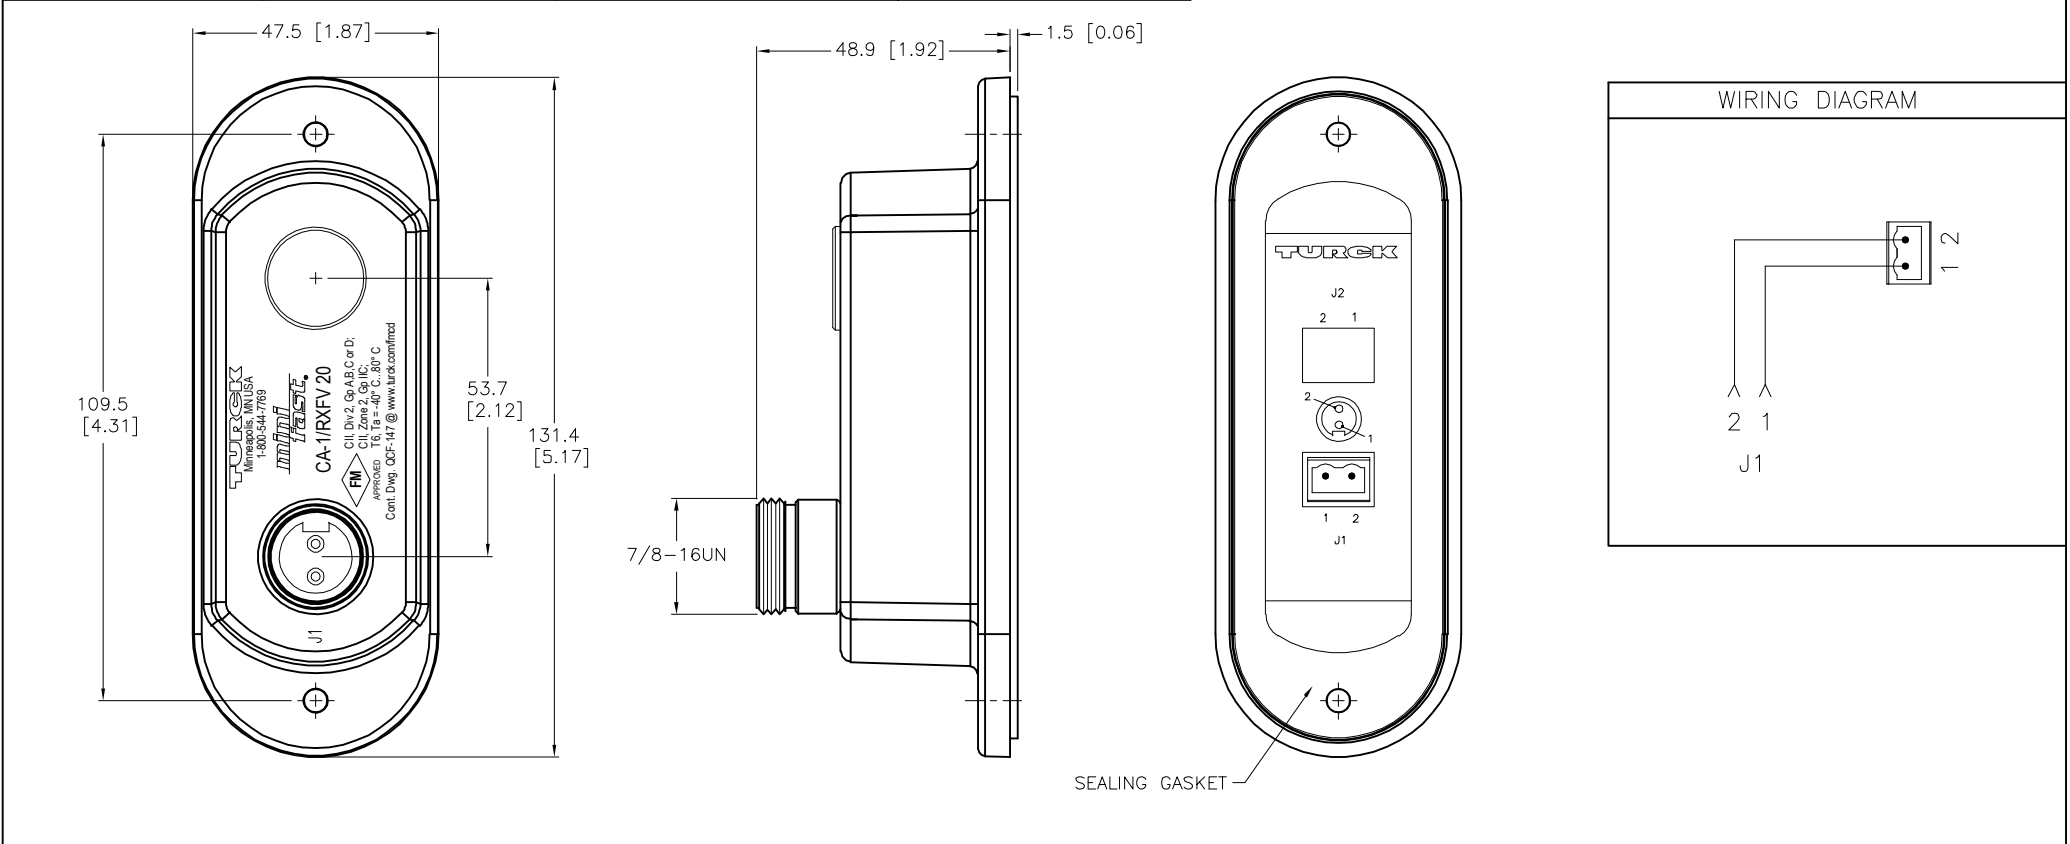


FEMALE END VIEW	TERMINAL BLOCK PLUG	TERMINAL PLUG INCLUDED	COVER SCREWS INCLUDED	SPECIFICATIONS	
 			 FORM 8 CONDUIT BODIES: 10-24 SCREWS  MARK 9 CONDUIT BODIES: 8-32 SCREWS	HOUSING MATERIAL/COLOR	NYLON 66 - 33% GLASS FILLED/BLACK
				RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
				CONTACT CARRIERS/COLOR	TPU/BLACK
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				OPERATING VOLTAGE	250 V
				OPERATING CURRENT	9.0 A PER CONDUCTOR
				PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
				OPERATING TEMPERATURE	-40°C to +80°C (-40°F to +176°F)



					SOURCE DRAWING - FOR REFERENCE ONLY			
RELATED DOCUMENTS 1. 2. 3. 4.					3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	
MATERIAL					DRFT RDS		DATE 11/24/08	
SEE SPECIFICATIONS					APVD		SCALE 1=1.5	
FINISH					UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS					MILLIMETER [INCH]		CA-1/RXFV 20	
					CONTACT TURCK FOR MORE INFORMATION		IDENTIFICATION NO.	
					DO NOT SCALE THIS DRAWING		U3-10805	
							REV	
							E	
							FILE: U3-10805	
							SHEET 1 OF 1	