


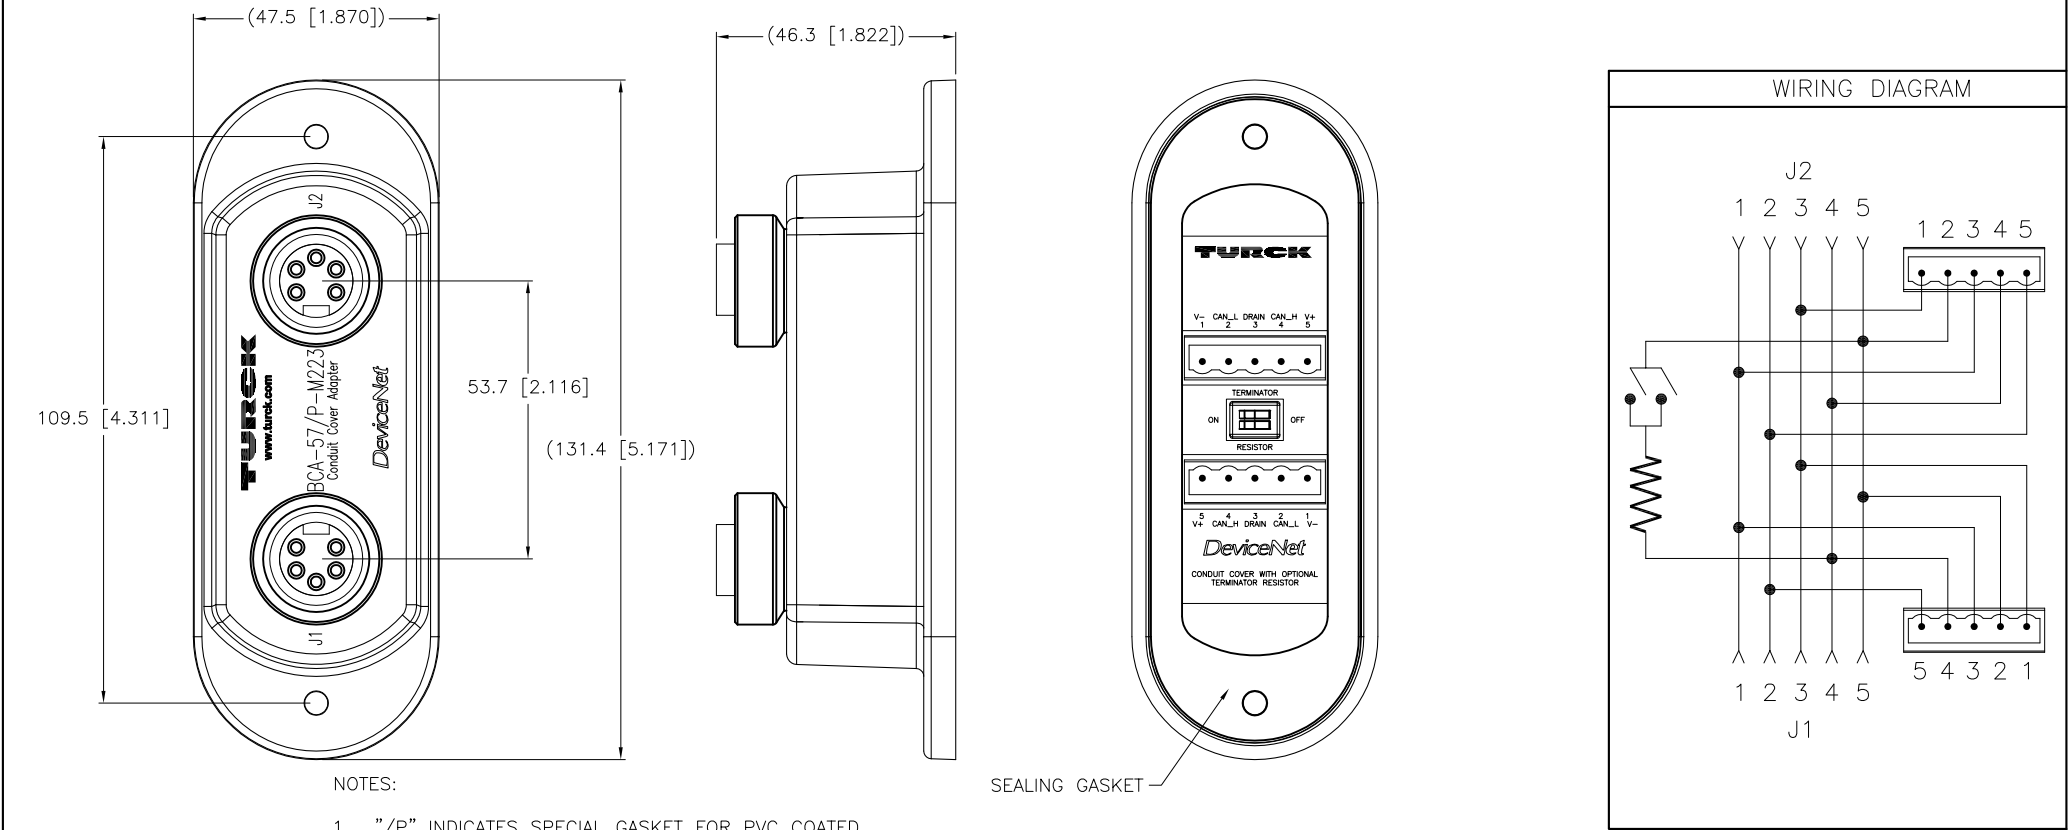





J1 & J2 CONNECTORS		TERMINAL BLOCK PLUGS		SPECIFICATIONS																			
 1 = DRAIN 2 = + VOLTAGE 3 = - VOLTAGE 4 = CAN_H 5 = CAN_L		 1 = - VOLTAGE 2 = CAN_L 3 = DRAIN 4 = CAN_H 5 = + VOLTAGE		<table><tr><td>HOUSING MATERIAL/COLOR</td><td>NYLON 66 - 33% GLASS FILLED/BLACK</td></tr><tr><td>RECEPTACLE HOUSING MATERIAL/FINISH</td><td>STAINLESS STEEL/PASSIVATED</td></tr><tr><td>CONTACT CARRIERS/COLOR</td><td>TPU/BLUE</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>OPERATING VOLTAGE</td><td>40 V</td></tr><tr><td>OPERATING CURRENT</td><td>8 A</td></tr><tr><td>OPTIONAL TERMINATOR RESISTOR</td><td>1 OF 2 SWITCHES IN "ON" POSITION</td></tr><tr><td>PROTECTION CLASS to DIN 40050</td><td>IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED</td></tr><tr><td>OPERATING TEMPERATURE</td><td>-40°C to +70°C (-40°F to +158°F)</td></tr></table>		HOUSING MATERIAL/COLOR	NYLON 66 - 33% GLASS FILLED/BLACK	RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED	CONTACT CARRIERS/COLOR	TPU/BLUE	CONTACT MATERIAL/PLATING	BRASS/GOLD	OPERATING VOLTAGE	40 V	OPERATING CURRENT	8 A	OPTIONAL TERMINATOR RESISTOR	1 OF 2 SWITCHES IN "ON" POSITION	PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED	OPERATING TEMPERATURE	-40°C to +70°C (-40°F to +158°F)
HOUSING MATERIAL/COLOR	NYLON 66 - 33% GLASS FILLED/BLACK																						
RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED																						
CONTACT CARRIERS/COLOR	TPU/BLUE																						
CONTACT MATERIAL/PLATING	BRASS/GOLD																						
OPERATING VOLTAGE	40 V																						
OPERATING CURRENT	8 A																						
OPTIONAL TERMINATOR RESISTOR	1 OF 2 SWITCHES IN "ON" POSITION																						
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED																						
OPERATING TEMPERATURE	-40°C to +70°C (-40°F to +158°F)																						
																							



COVER SCREWS INCLUDED					CONDUIT BODIES AND NYLON SCREWS.					SOURCE DRAWING - FOR REFERENCE ONLY				
 FORM 8 CONDUIT BODIES: 10-24 SCREWS  MARK 9 CONDUIT BODIES: 8-32 SCREWS					 TERMINAL PLUGS INCLUDED					RELATED DOCUMENTS 1. 2. 3. 4. MATERIAL FINISH 3RD ANGLE PROJECTION  ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. DRFT RDS DATE 12/03/08 DSGN SCALE 1=1.5 UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com TURCK INC High Technology Sensors and Automation Controls DESCRIPTION BCA-57/P-M223 IDENTIFICATION NO. U3-10811 REV C FILE: U3-10811 SHEET 1 OF 1				
C	UPDATE MOUNTING HOLE DIMENSION				CK	04/28/11	34946							
REV	DESCRIPTION				BY	DATE	ECO NO.							